




# SLOWN系列高效双吸离心泵

SLOWN SERIES OF HIGH EFFICIENCY DOUBLE SUCTION CENTRIFUGAL PUMP

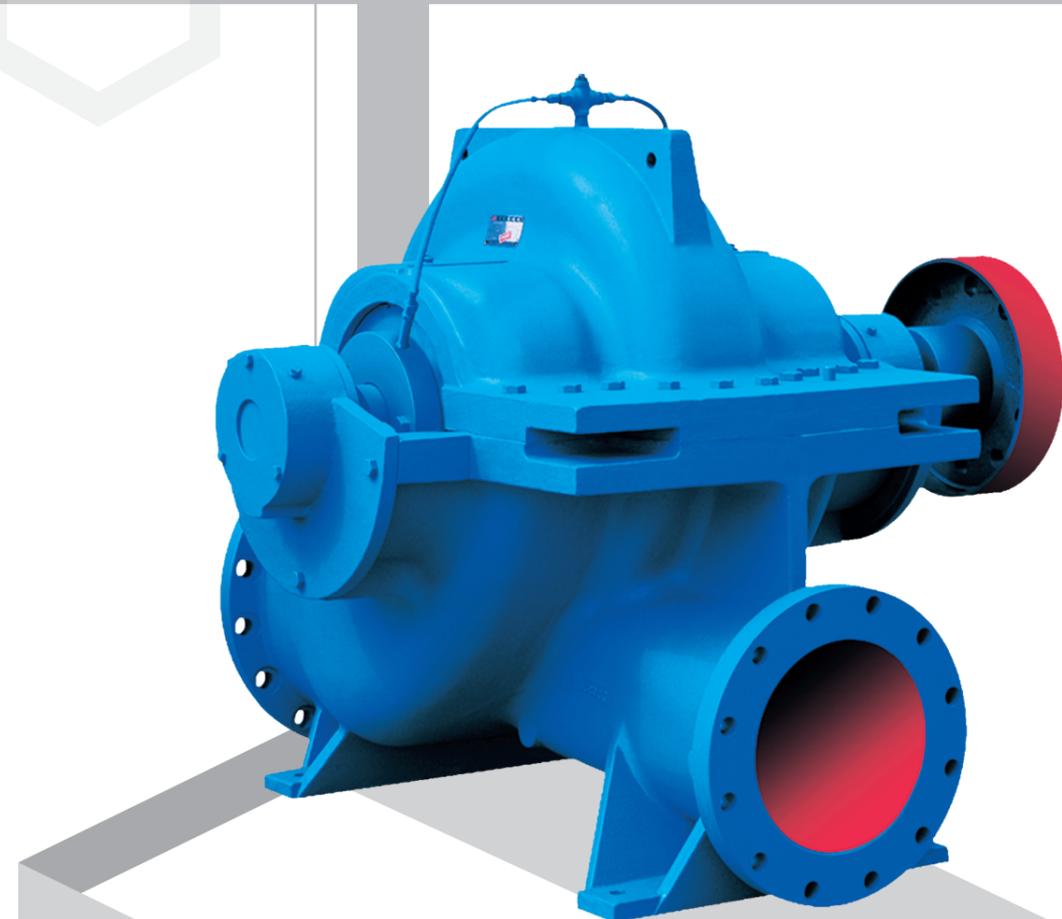

**上海连成（集团）有限公司**  
SHANGHAI LIANCHENG (GROUP)CO.,LTD.

地址：上海市江桥镇曹安公路3616-3618号  
邮编：201812  
总机：(021) 59138888  
传真：(021) 59136782  
800免费咨询电话：800-820-5009  
400免费咨询电话：400-188-3339

Address:3616-3618 Can'an Road, Jiangqiao Shanghai  
P.C.: 201812  
Switchboard: (021) 5913888  
Fax: (021) 59136782  
800 Free consultation Tel: 800-820-5009  
400 Free consultation Tel: 400-188-3339



连成集团微信订阅号


# 目 录

## CONTENTS


---

<b>型号说明</b> About the model	1
<b>产品结构图</b> Product structure drawing	1
<b>技术特点</b> Technical characteristics	2
<b>SLOWN泵的工作条件</b> SLOWN pump working conditions	2
<b>主要零部件说明</b> Major parts description	2
<b>适用于SLOWN泵的标准</b> Applicable to SLOWN pumps	4
<b>SLOWN系列泵型谱图</b> SLOWN series pump atlas of style	5
<b>SLOWN系列泵性能曲线、参数表</b> Performance curve, parameter table	6
<b>泵旋转方向说明</b> Pump rotation direction	92
<b>订货须知</b> Ordering instructions	93

## 型号说明 About the model

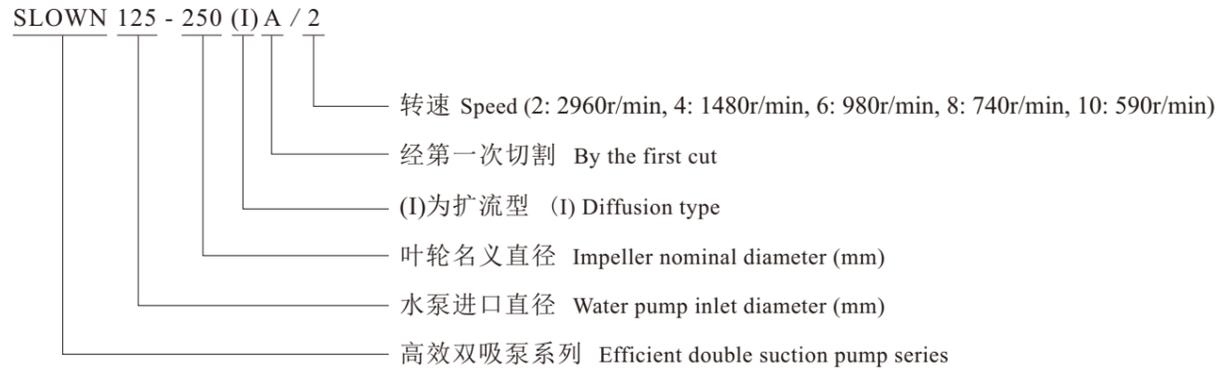

## 产品结构图 Product structure drawing

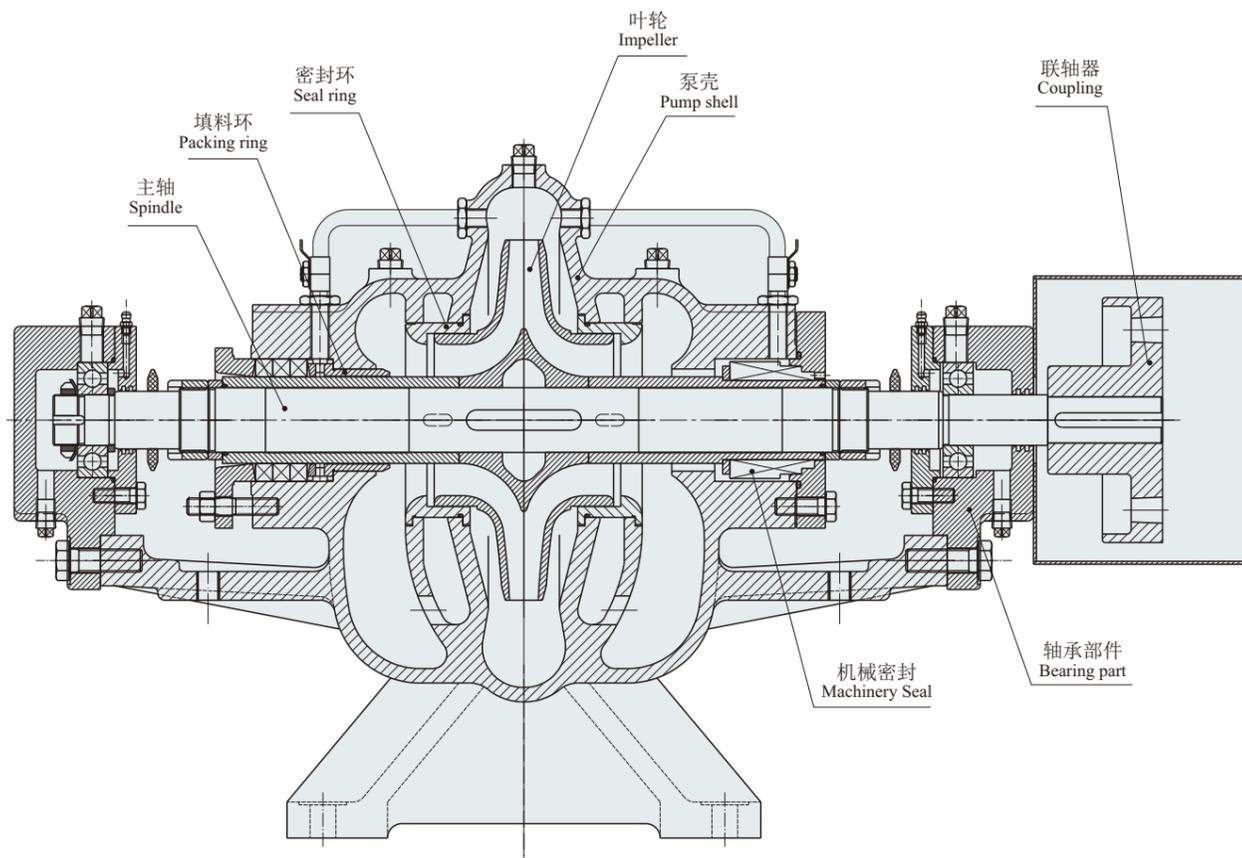

## 技术特点 Technical characteristics

SLOWN系列高效双吸泵是由我司最新自主研发的中开式双吸离心泵。定位于高品质技术标准，采用全新的水力设计模型，其效率通常高于国家效率2~8个百分点或以上，并具有良好的汽蚀性能，型谱覆盖更完善，可以有效替代原有的S型及O型泵。

泵体、泵盖、叶轮等材料常规为HT250配置，同时也可选用球铁、铸钢或不锈钢系列材料，具体可与技术支持沟通。

SLOWN series of high efficiency double suction pump is the latest self-developed by the open double suction centrifugal pump. Positioning in high-quality technical standards, the use of a new hydraulic design model, its efficiency is usually higher than the national efficiency of 2 to 8 percentage points or more, and has good cavitation performance, better coverage of the spectrum, can effectively replace the original S Type and O type pump.

Pump body, pump cover, impeller and other materials for the HT250 conventional configuration, but also optional ductile iron, cast steel or stainless steel series of materials, specifically with technical support to communicate.

## SLOWN泵的工作条件 SLOWN pump working conditions

转速: 590, 740, 980、1480和2960r/min

电压: 380V, 6kV或10kV

进口口径: 125~1200mm

流量范围: 110~15600m<sup>3</sup>/h

扬程范围: 12~160m

(有超出流量或扬程范围的可特殊设计, 具体与总部沟通)

温度范围: 液体最高温度80℃ (~120℃), 环境温度一般40℃。

允许输送介质: 清水, 如介质为其他液体, 请与我司技术支持联系。

Speed: 590,740,980,1480 and 2960r/min

Voltage: 380V, 6kV or 10kV

Import caliber: 125~1200mm

Flow range: 110~15600m<sup>3</sup>/h

Head range: 12~160m

(There are beyond the flow or head range can be a special design, specific communication with the headquarters)

Temperature range: the maximum liquid temperature of 80℃ (~120℃), the ambient temperature is generally 40℃

Allow the delivery of media: water, such as media for other liquids, please contact our technical support.


## 主要零部件说明 Major parts description

### 叶轮:

SLOWN系列泵部分型号的叶轮由两个单吸叶轮组合而成, 采用全新的国外水力设计方法设计水力模型, 并采用相邻叶片相互交错的结构, 水流脉冲下降到扬程的±1%~±2%, 使水流更平稳, 效率更高, 必需汽蚀余量更低。

### Impeller:

SLOWN series pump part of the model of the impeller by the combination of two single suction impeller, the use of new foreign hydraulic design method to design hydraulic model, and the use of adjacent leaves intertwined structure, the water pulse down to the head of ±1% to ±2 %, So that the flow is more stable, more efficient, lower calorific value must be.

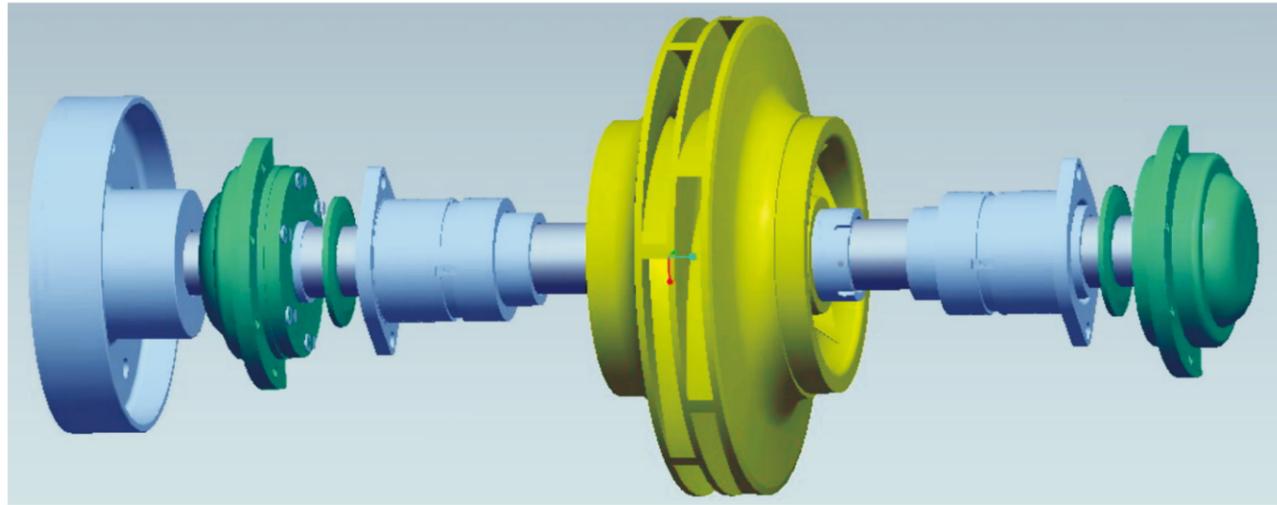

### 壳体密封环:

采用加长型密封环, 比传统密封环有更好的防泄露能力, 有效提高泵的容积效率。

### 蜗壳:

泵壳可按不同介质选用不同的材料, 可以制成铸铁、铸钢或不锈钢的泵壳。

### 轴封:

轴的密封有填料密封、单端面机械密封或双端面机械密封, 还可做成平衡型机械密封。双端面机械密封采用集装箱式结构, 充分考虑了通用性和更换的方便性。

### 轴承:

SLOWN泵的轴承常规采用国产优质轴承, 也可以选用进口的SKF、NSK、NTN等轴承, 轴承可采用油润滑或脂润滑。

### 转子动平衡:

SLOWN泵其整套转子总成转动部件组装一起进行动平衡校正。所校正的部件包括: 叶轮、主轴、叶轮螺母等。其执行标准为: GB/T 9239的G2.5级。

### Shell Seal Ring:

The use of lengthened seal ring, than the traditional seal ring has a better anti-leakage ability, effectively improve the pump volumetric efficiency.

### Volute:

Pump casing can be used according to different media different materials, can be made of cast iron, cast steel or stainless steel pump shell.

### Shaft seal:

Shaft seal with packing seal, single-ended mechanical seal or double-end mechanical seal, can also be made of balanced mechanical seal. The double-ended mechanical seal uses a container-type structure, taking full account of the versatility and ease of replacement.

### Bearing:

SLOWN pump bearings are made of domestic high-quality bearings, you can also use imported SKF, NSK, NTN and other bearings, bearings can be used to lubricate oil or grease.

### Rotor balance:

SLOWN pump the entire set of rotor assembly rotary parts assembled together for dynamic balance correction. The calibrated components include: impeller, spindle, impeller nut and so on. The implementation of standards: GB/T 9239 the G2.5 level.

### 材料和部件:

由于在结构设计上充分考虑了泵的多功能性, 所以可根据不同介质, 选用多种材料应用于不同的零部件上。参见下表:

### Materials and parts:

Due to the structural design of the full consideration of the versatility of the pump, so according to no media, use a variety of materials used in different parts. See the table below:

泵材料选择 Pump material selection										
类型代号 Type code	CC			CD				DD		
应用场合 Application	适用于普通清水以及低强度要求; Suitable for ordinary water and low strength requirements;			适用于含少量颗粒杂质PH值为6~8的污水, 以及更高强度要求; Applicable to a small amount of particulate impurities PH value of 6 to 8 of the sewage, and higher strength requirements;				适用于含一定量颗粒杂质的PH<6的其它腐蚀性介质以及更高强度要求; Suitable for use with a certain amount of particulate impurities PH <6 other corrosive media and higher strength requirements;		
材料 Material	灰铸铁 Grey cast iron	超低碳不锈钢 Ultra low carbon stainless steel	马氏体不锈钢/高强度合金结构钢 Martensitic stainless steel / high strength alloy structural steel	灰铸铁 Grey cast iron	超低碳不锈钢 Ultra low carbon stainless steel	不锈钢 Stainless steel	马氏体不锈钢/高强度合金结构钢 Martensitic stainless steel / high strength alloy structural steel	灰铸铁 Grey cast iron	超低碳不锈钢 Ultra low carbon stainless steel	双相不锈钢 Duplex stainless steel
中国标准(GB) Chinese standard	HT250	06Cr19Ni10	20Cr13/40Cr	HT250	06Cr19Ni10	06Cr13Ni4Mo	20Cr13/40Cr	HT250	06Cr17Ni12Mo2	022Cr23Ni5Mo3N
泵壳 Pump shell	√			√					√	
叶轮 Impeller	√					√			√	
主轴 Spindle			√				√			√
轴套 Bushings		√			√				√	
轴承体 Bearing body	√			√				√		
密封环 Seal ring	√				√				√	
密封压盖 Sealed gland	√				√				√	
根据客户要求叶轮和泵壳可选用其它不锈钢材料 According to customer requirements impeller and pump shell can choose other stainless steel										
备注 Remarks	应尽量避免混合材料的焊接 Should try to avoid the welding of mixed materials									

## 适用于SLOWN泵的标准 Applicable to SLOWN pumps

设计标准: GB/T 5657-2013

测试标准: GB/T 3216-2016

法兰标准: GB/T 17241.6-2008

GB/T9113.1-2000

ISO 7005.2

动平衡标准: GB/T 9239的G2.5级

Design standards: GB/T 5657-2013

Test standard: GB/T 3216-2016


Flange standard: GB/T 17241.6-2008

GB/T9113.1-2000


ISO 7005.2

Dynamic balance standard: GB/T 9239 the G2.5 level

## SLOWN系列泵型谱图 SLOWN series pump atlas of style

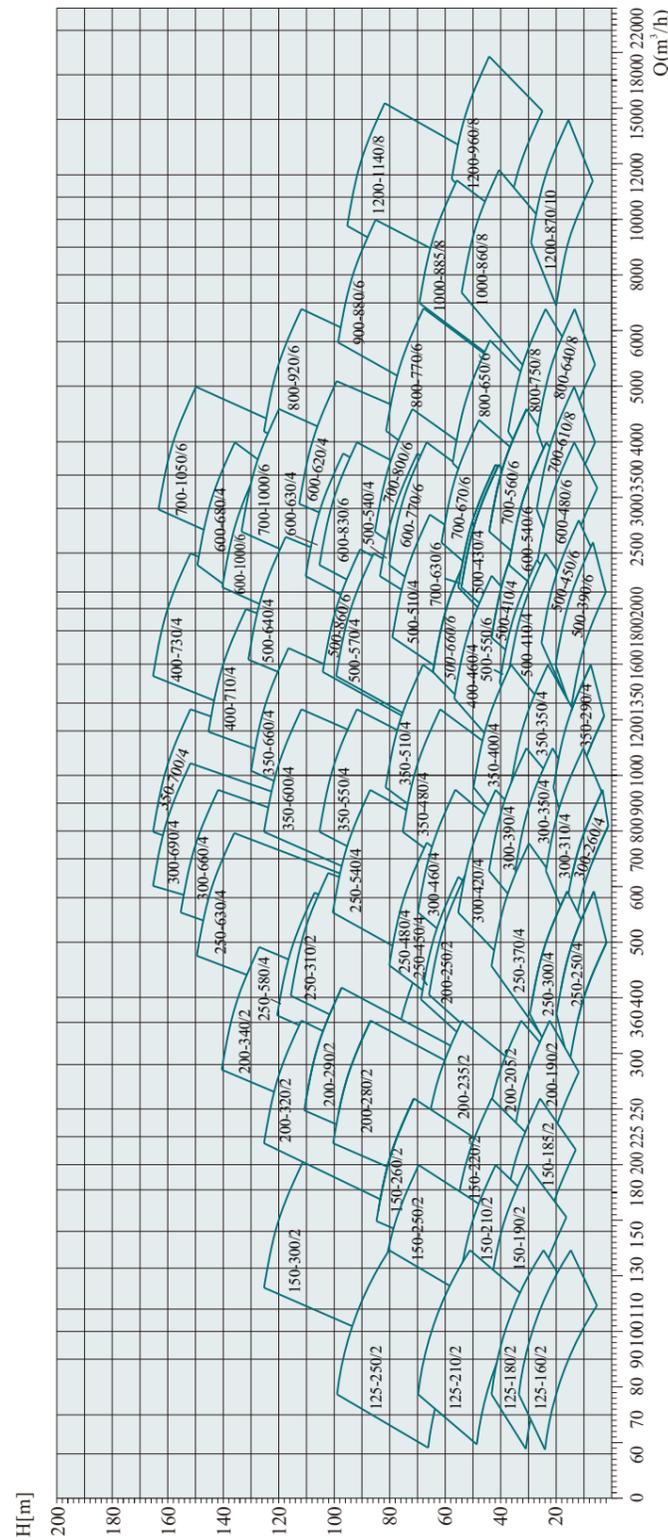


## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

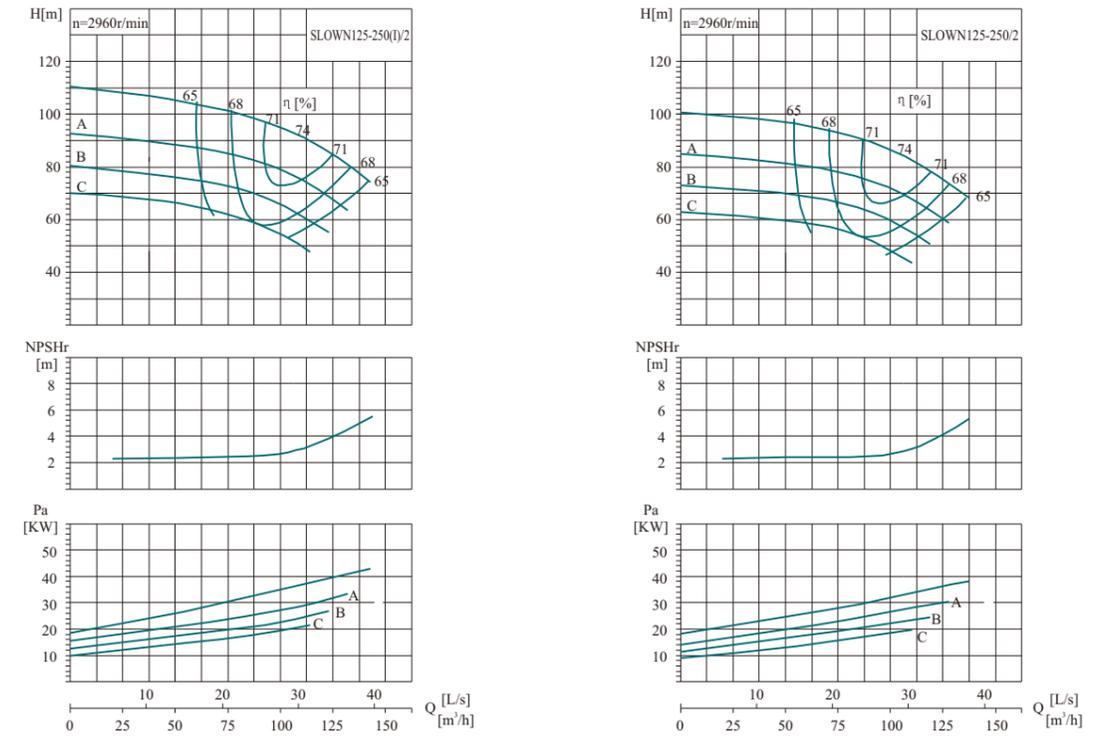


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN125-250(I)/2		66	18.3	98.3	3	2960	65	27.2	55	
		110	30.6	91.0			74	36.8		
		132	36.7	81.0			71	41.0		
	A	61	17.0	84.1			63	22.2	45	
		102	28.3	77.9			72	30.0		
		122	33.9	69.3			69	33.4		
		B	57	15.8			72.7	61	18.4	37
			95	26.3			67.3	70	24.8	
			114	31.5			59.9	67	27.6	
	C	53	14.7	62.9			59	15.3	30	
		88	24.4	58.2			68	20.5		
		106	29.3	51.8			65	22.9		
SLOWN125-250/2		64	17.6	91.0	3	2960	65	24.2	45	
		106	29.4	84.3			74	32.8		
		127	35.3	75.0			71	36.5		
	A	59	16.4	78.3			63	19.9	45	
		98	27.3	72.5			72	26.9		
		118	32.7	64.5			69	30.0		
		B	55	15.2			67.7	61	16.6	37
			91	25.4			62.7	70	22.3	
			110	30.4			55.8	67	24.8	
	C	51	14.1	58.3			59	13.7	30	
		85	23.5	54.0			68	18.3		
		102	28.2	48.0			65	20.4		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

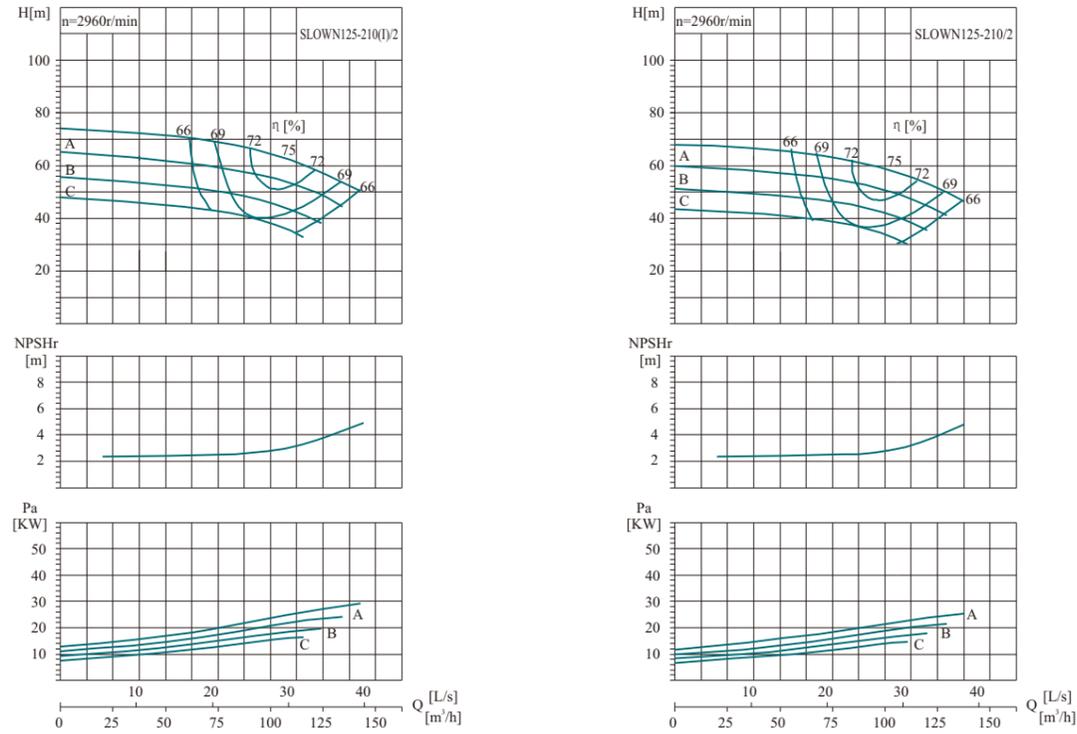


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)		
	(m³/h)	(L/s)									
SLOWN125-210(I)2		66	18.3	67.0	3	2960	66	18.2	30	180	
		110	30.6	62.0			75	24.8			
		127	35.1	55.2			72	26.4			
	A	62	17.2	59.2			64	15.6	30		18.5
		103	28.7	54.8			73	21.1			
		124	34.5	48.8			70	23.5			
	B	57	16.0	50.7			62	12.8	22		18.5
		96	26.6	46.9			71	17.2			
		115	31.9	41.8			68	19.2			
	C	53	14.9	43.9			60	10.7	18.5		18.5
		89	24.8	40.7			69	14.3			
		107	29.7	36.2			66	16.0			
SLOWN125-210/2		64	17.6	62.0	3	2960	66	16.3	30	180	
		106	29.4	57.4			75	22.1			
		127	35.3	51.1			72	24.6			
	A	60	16.6	54.8			64	13.9	30		18.5
		100	27.7	50.8			73	18.9			
		119	33.2	45.2			70	21.0			
	B	55	15.4	47.2			62	11.5	22		18.5
		92	25.7	43.7			71	15.5			
		111	30.8	38.9			68	17.3			
	C	51	14.2	40.2			60	9.3	18.5		18.5
		85	23.7	37.2			69	12.5			
		102	28.4	33.1			66	14.0			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

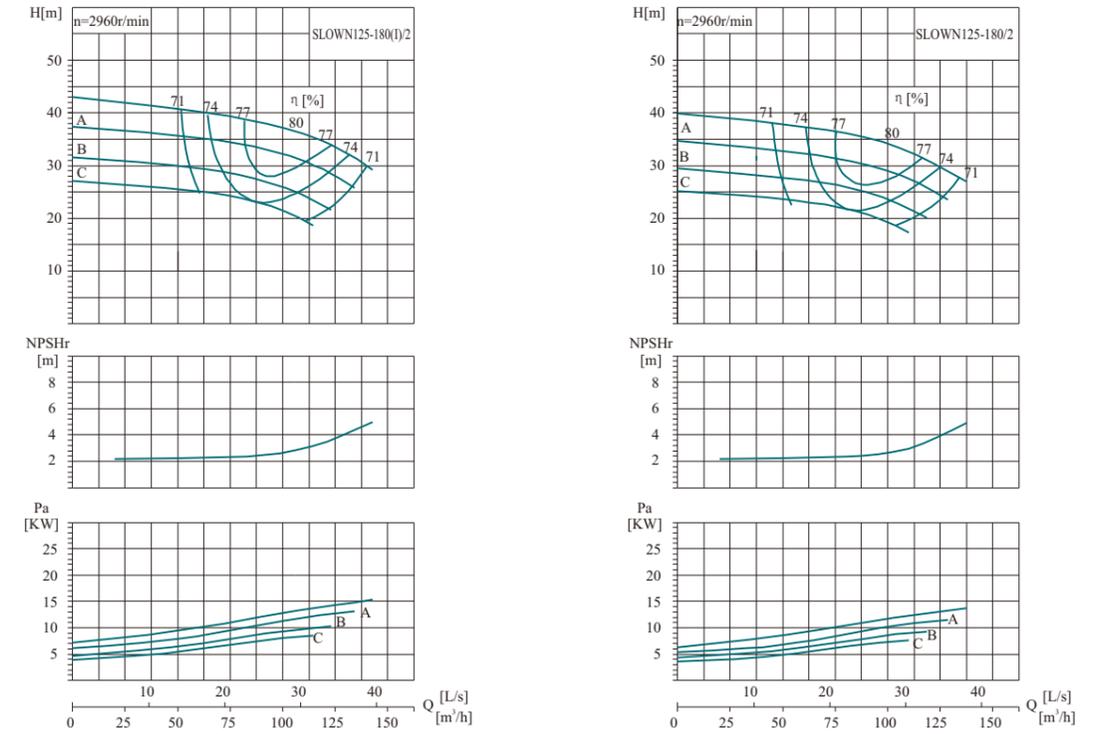


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)		
	(m³/h)	(L/s)									
SLOWN125-180(I)2		66	18.3	38.9	3	2960	71	9.8	18.5	160	
		110	30.6	36.0			80	13.5			
		132	36.7	32.0			77	15.0			
	A	62	17.2	34.4			62	8.4	15		11
		103	28.7	31.8			78	11.5			
		124	34.5	28.3			75	12.8			
	B	57	15.8	28.8			67	6.6	11		11
		95	26.3	26.6			76	9.0			
		109	30.2	23.7			73	9.6			
	C	53	14.7	24.9			65	5.5	11		11
		88	24.4	23.0			74	7.5			
		106	29.3	20.5			71	8.3			
SLOWN125-180/2		64	17.6	36.0	3	2960	71	8.8	15	160	
		106	29.4	33.4			80	12.0			
		127	35.3	29.7			77	13.3			
	A	59	16.5	31.5			69	7.4	15		11
		99	27.5	29.2			78	10.1			
		119	33.0	26.0			75	11.2			
	B	55	15.2	26.8			67	6.0	11		11
		91	25.4	24.8			76	8.1			
		110	30.4	22.1			73	9.0			
	C	51	14.1	23.1			65	4.9	11		11
		85	23.5	21.3			74	6.7			
		102	28.2	19.0			71	7.4			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

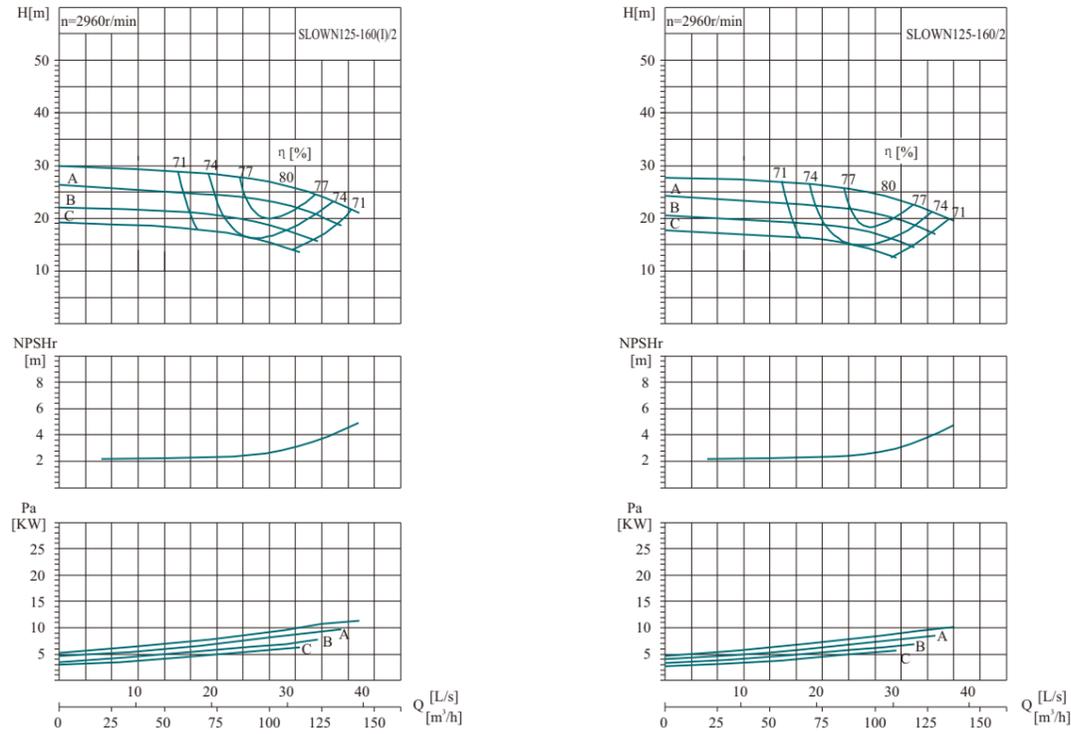


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN125-160(I)/2		66	18.3	28.1	2960	71	7.1	11	160
		110	30.6			80	9.7		
		124	34.5			77	10.2		
	A	62	17.2	24.8		69	6.1	11	
		103	28.7	23.0		78	8.3		
		124	34.5	20.4		75	9.2		
	B	57	15.8	20.8		67	4.8	7.5	
		95	26.3	19.2		76	6.5		
		109	30.2	17.1		73	6.9		
	C	53	14.7	18.0		65	4.0	7.5	
		88	24.4	16.6		74	5.4		
		106	29.3	14.8		71	6.0		
SLOWN125-160/2		64	17.6	26.0	2960	71	6.3	11	160
		106	29.4	24.1		80	8.7		
		127	35.3	21.4		77	9.6		
	A	59	16.5	22.7		69	5.3	11	
		99	27.5	21.1		78	7.3		
		119	33.0	18.7		75	8.1		
	B	55	15.2	19.3		67	4.3	7.5	
		91	25.4	17.9		76	5.9		
		110	30.4	15.9		73	6.5		
	C	51	14.1	16.6		65	3.5	7.5	
		85	23.5	15.4		74	4.8		
		102	28.2	13.7		71	5.3		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

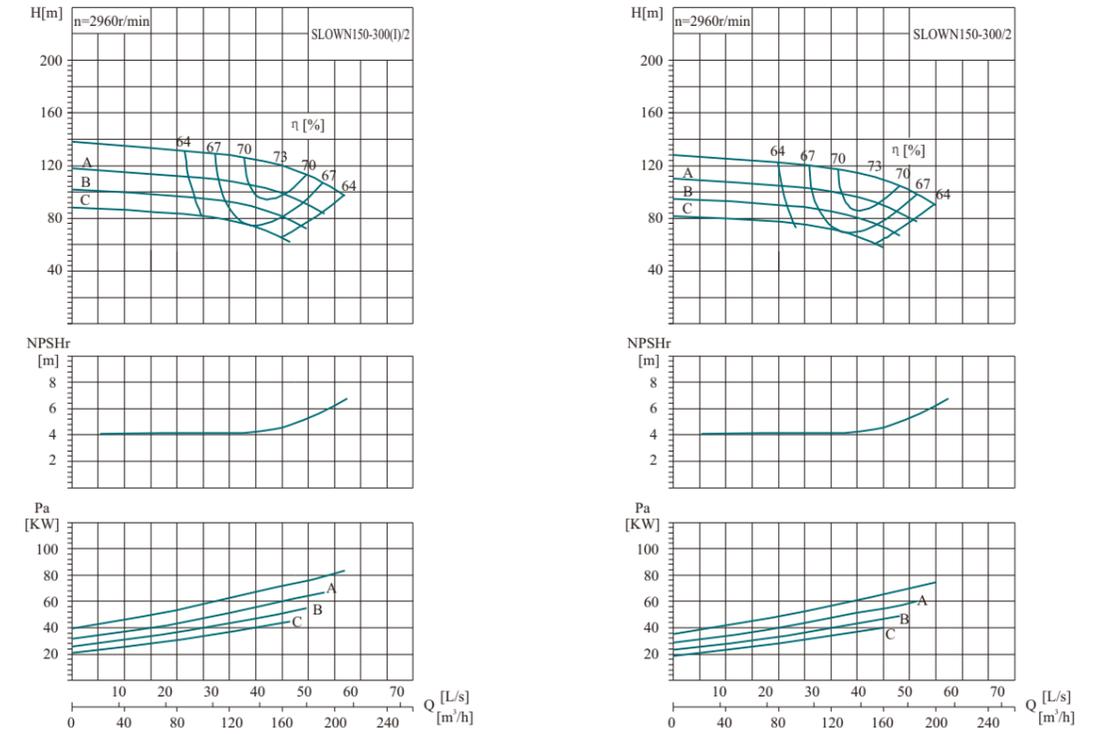


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN150-300(I)/2		96	26.7	129.6	2960	64	52.9	90	220
		160	44.4	120.0		73	71.6		
		192	53.3	106.8		71	78.6		
	A	89	24.7	110.9		63	42.5	75	
		148	41.1	102.7		72	57.5		
		178	49.3	91.4		70	63.1		
	B	83	22.9	95.9		62	34.7	75	
		138	38.2	88.8		71	46.8		
		165	45.9	79.0		69	51.5		
	C	77	21.3	82.9		61	28.4	55	
		128	35.6	76.8		70	38.2		
		154	42.7	68.4		68	42.0		
SLOWN150-300/2		92	25.7	120.1	2960	64	47.2	75	220
		154	42.8	111.2		73	63.8		
		185	51.3	98.9		71	70.1		
	A	86	23.8	103.2		63	38.2	75	
		143	39.7	95.6		72	51.6		
		171	47.6	85.1		70	56.7		
	B	80	22.1	89.3		62	31.2	55	
		133	36.9	82.7		71	42.1		
		159	44.3	73.6		69	46.3		
	C	74	20.5	76.8		61	25.3	45	
		123	34.2	71.1		70	34.1		
		148	41.1	63.3		68	37.5		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

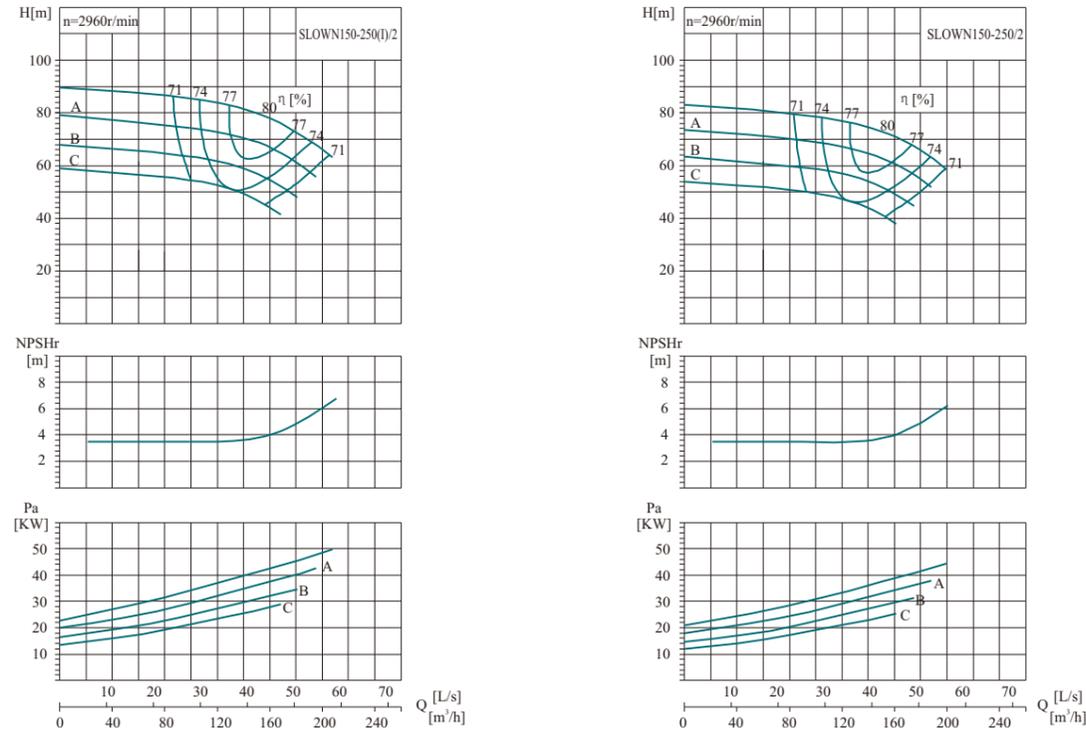


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN150-250(I)/2		96	26.7	84.2	4	2960	71	31.0	55	180
		160	44.4	78.0			80	42.5		
		184	51.1	69.4			77	45.2		
	A	90	25.1	74.4			69	26.5	45	
		150	41.8	68.9			78	36.2		
		180	50.1	61.3			75	40.2		
	B	84	23.2	63.8			67	21.6	37	
		139	38.7	59.0			76	29.4		
		167	46.4	52.5			73	32.7		
	C	78	21.6	55.3			65	18.0	37	
		130	36.0	51.2			74	24.4		
		156	43.2	45.5			71	27.2		
SLOWN150-250/2		92	25.7	78.0	4	2960	71	27.6	55	180
		154	42.8	72.3			80	37.9		
		185	51.3	64.3			77	42.0		
	A	87	24.1	69.0			69	23.6	45	
		145	40.2	63.9			78	32.3		
		174	48.3	56.9			75	35.9		
	B	81	22.4	59.4			67	19.5	37	
		134	37.3	55.0			76	26.5		
		161	44.8	49.0			73	29.5		
	C	74	20.7	50.6			65	15.8	30	
		124	34.4	46.8			74	21.4		
		149	41.3	41.7			71	23.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

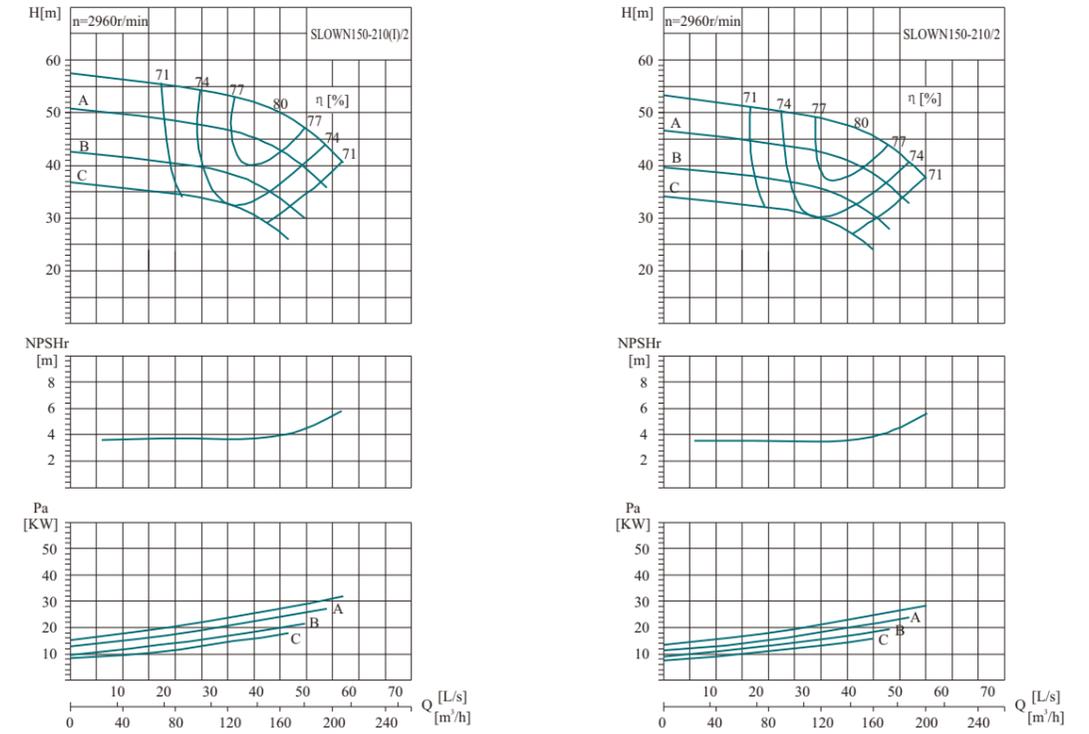


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN150-210(I)/2		96	26.7	54.0	4	2960	71	19.9	37	160
		160	44.4	50.0			80	27.2		
		192	53.3	44.5			77	30.2		
	A	90	25.1	47.7			69	17.0	30	
		150	41.8	44.2			78	23.2		
		180	50.1	39.3			75	25.8		
	B	83	22.9	39.9			67	13.4	30	
		138	38.2	37.0			76	18.2		
		158	44.0	32.9			73	19.4		
	C	77	21.3	34.6			65	11.1	22	
		128	35.6	32.0			74	15.1		
		154	42.7	28.5			71	16.8		
SLOWN150-210/2		92	25.7	50.0	4	2960	71	17.7	30	160
		154	42.8	46.3			80	24.3		
		185	51.3	41.2			77	26.9		
	A	86	24.0	43.7			69	14.9	30	
		144	40.0	40.5			78	20.4		
		173	48.0	36.0			75	22.6		
	B	80	22.1	37.2			67	12.0	22	
		133	36.9	34.4			76	16.4		
		159	44.3	30.7			73	18.2		
	C	74	20.5	32.0			65	9.9	18.5	
		123	34.2	29.6			74	13.4		
		148	41.1	26.4			71	15.0		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

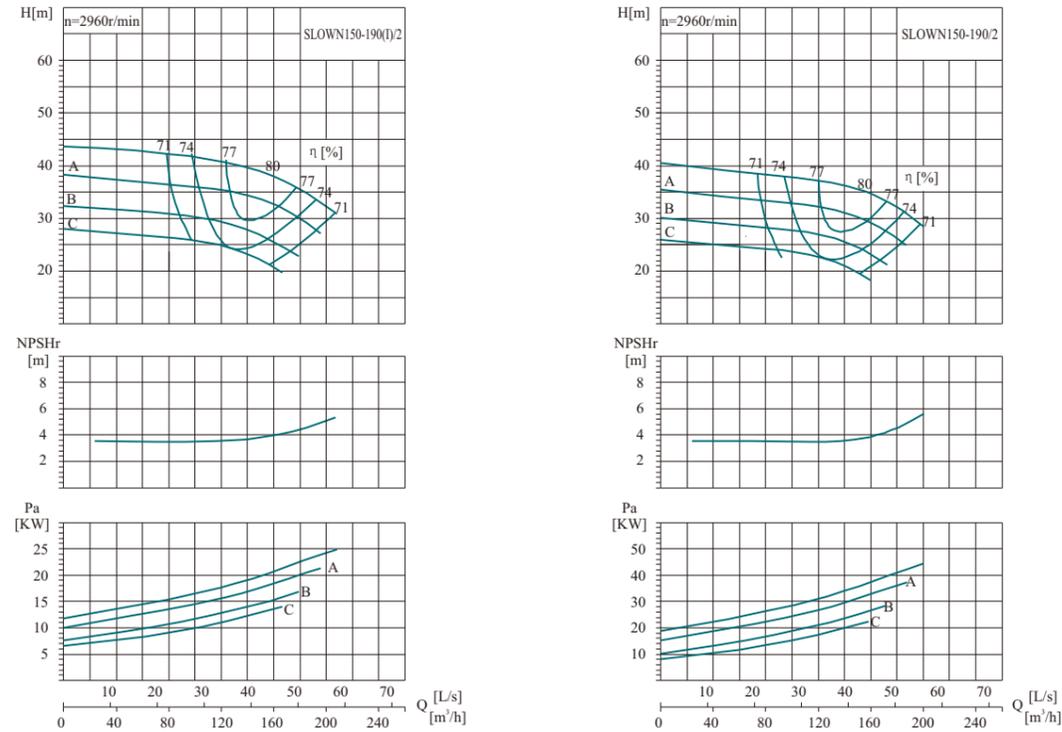


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN150-190(I)2		96	26.7	41.0	4	71	15.1	30	150
		160	44.4	38.0		80	20.7		
		181	50.2	33.8		77	21.6		
	A	90	25.1	36.3		69	12.9	22	
		150	41.8	33.6		78	17.6		
		180	50.1	29.9		75	19.6		
	B	83	22.9	30.4		67	10.2	18.5	
		138	38.2	28.1		76	13.9		
		158	44.0	25.0		73	14.8		
	C	77	21.3	26.3		65	8.4	15	
		128	35.6	24.3		74	11.5		
		154	42.7	21.6		71	12.7		
SLOWN150-190/2		92	25.7	38.0	4	71	13.5	22	150
		154	42.8	35.2		80	18.4		
		185	51.3	31.3		77	20.5		
	A	86	24.0	33.2		69	11.3	22	
		144	40.0	30.8		78	15.5		
		173	48.0	27.4		75	17.2		
	B	80	22.1	28.3		67	9.2	18.5	
		133	36.9	26.2		76	12.5		
		159	44.3	23.3		73	13.8		
	C	74	20.5	24.3		65	7.5	15	
		123	34.2	22.5		74	10.2		
		148	41.1	20.1		71	11.4		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

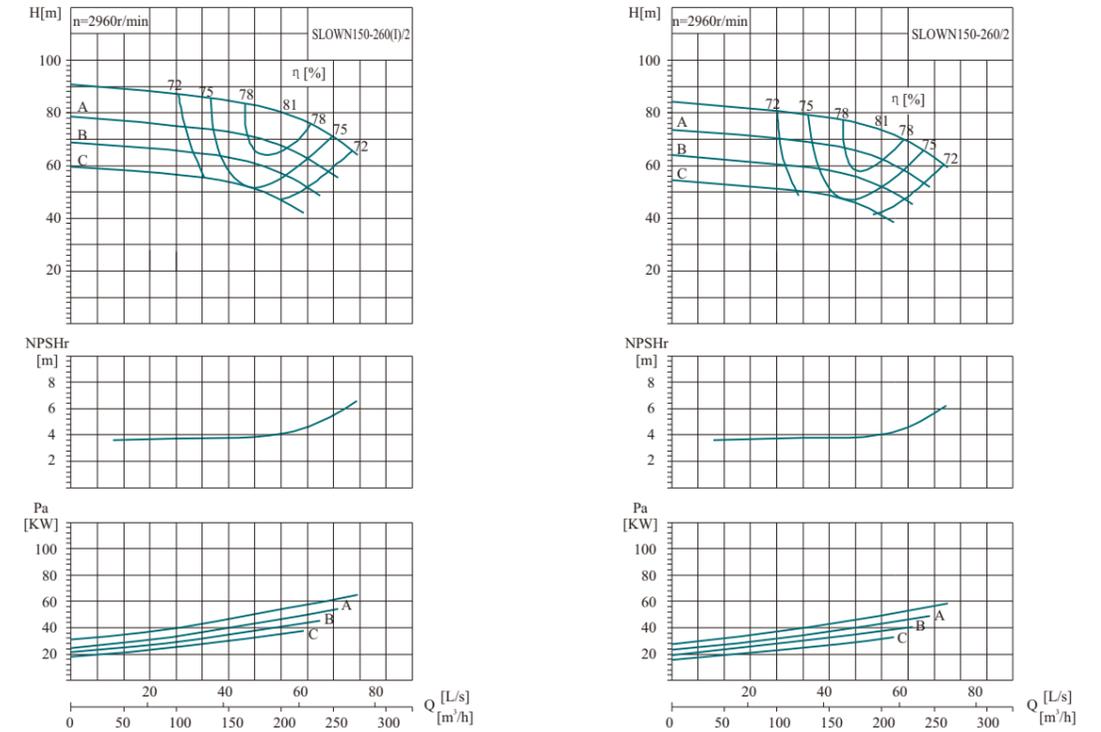


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN150-260(I)2		126	35.0	85.3	4.1	72	40.6	75	260
		210	58.3	79.0		81	55.8		
		252	70.0	70.3		78	61.8		
	A	117	32.6	73.8		70	33.6	55	
		195	54.3	68.3		79	46.0		
		225	62.4	60.8		76	48.9		
	B	110	30.5	64.6		68	28.3	55	
		183	50.8	59.8		77	38.6		
		219	60.9	53.2		74	42.9		
	C	102	28.4	56.0		66	23.6	45	
		170	47.3	51.8		75	32.0		
		204	56.7	46.1		72	35.6		
SLOWN150-260/2		121	33.7	79.0	4.1	72	36.2	75	260
		202	56.1	73.2		81	49.7		
		243	67.4	65.1		78	55.1		
	A	113	31.5	69.1		70	30.5	55	
		189	52.5	64.0		79	41.7		
		227	63.0	57.0		76	46.3		
	B	106	29.4	60.2		68	25.5	45	
		176	49.0	55.7		77	34.8		
		212	58.8	49.6		74	38.6		
	C	98	27.1	51.2		66	20.6	37	
		163	45.2	47.4		75	28.0		
		195	54.3	42.2		72	31.2		

#### SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

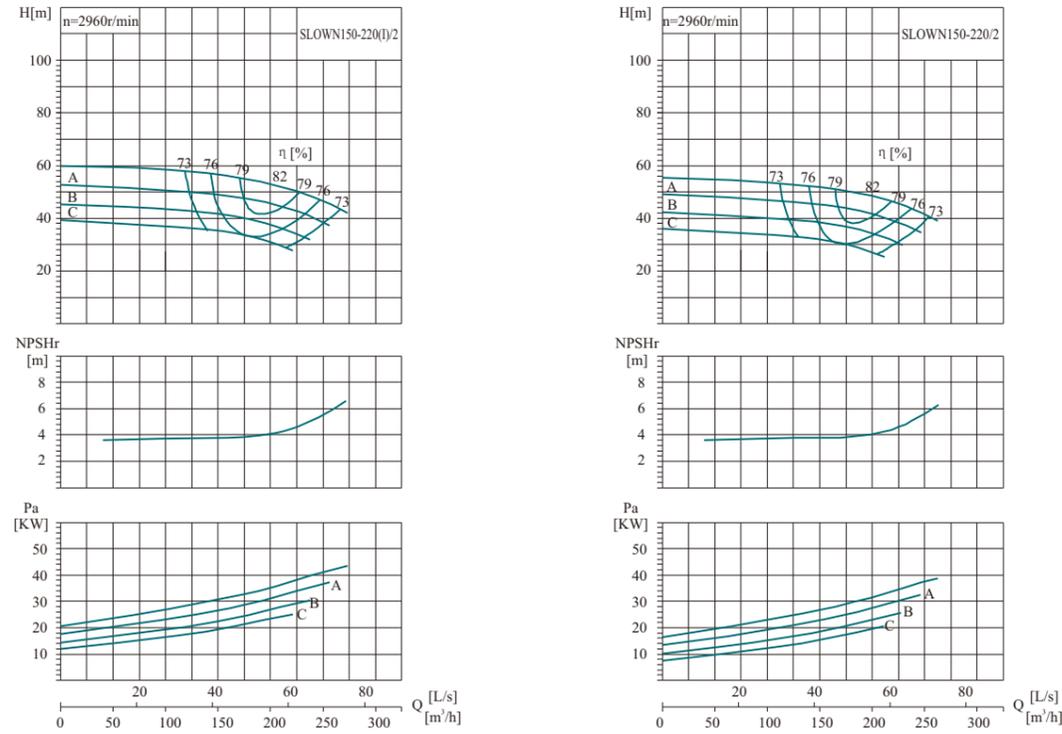


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN150-220(I)/2		126	35.0	4.4	2960	73	26.4	45	240
		210	58.3			82	36.3		
		242	67.1			79	38.5		
	A	118	32.9	49.6	71	22.5	37		
		197	54.8	45.9	80	30.9			
		237	65.8	40.9	77	34.2			
	B	110	30.5	42.5	69	18.4	30		
		183	50.8	39.4	78	25.1			
		219	60.9	35.0	75	27.9			
	C	102	28.4	36.8	67	15.3	30		
		170	47.3	34.1	76	20.8			
		204	56.7	30.4	73	23.1			
SLOWN150-220/2		121	33.7	4.4	2960	73	23.5	45	240
		202	56.1			82	32.3		
		243	67.4			79	35.8		
	A	114	31.7	46.0	71	20.1	37		
		190	52.8	42.6	80	27.5			
		228	63.4	37.9	77	30.6			
	B	106	29.4	39.6	69	16.5	30		
		176	49.0	36.7	78	22.6			
		212	58.8	32.7	75	25.1			
	C	98	27.1	33.7	67	13.4	30		
		163	45.2	31.2	76	18.2			
		195	54.3	27.8	73	20.2			

#### SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

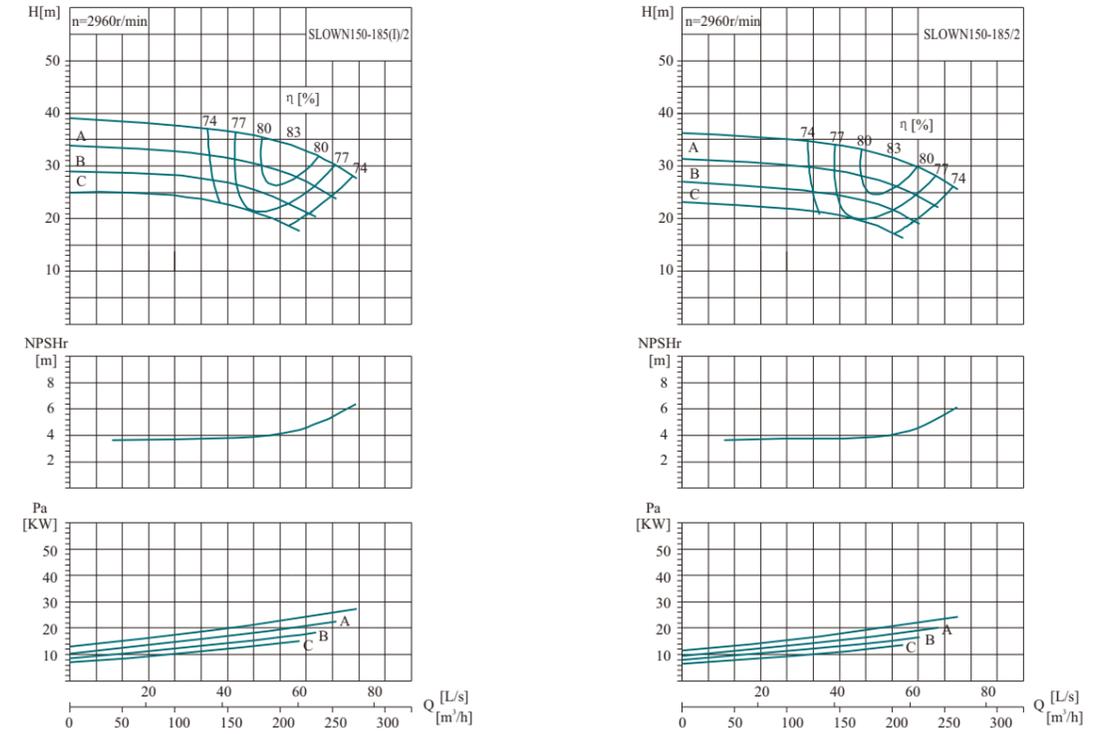


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN150-185(I)/2		126	35.0	4.7	2960	74	17.0	30	220
		210	58.3			83	23.4		
		252	70.0			80	25.9		
	A	117	32.6	31.8	72	14.1	22		
		195	54.3	29.4	81	19.3			
		225	62.4	26.2	78	20.5			
	B	108	30.1	27.2	70	11.4	18.5		
		181	50.2	25.1	79	15.6			
		213	59.2	22.4	76	17.1			
	C	101	28.0	23.5	68	9.5	15		
		168	46.7	21.8	77	12.9			
		197	54.6	19.4	74	14.0			
SLOWN150-185/2		121	33.7	4.7	2960	74	15.2	30	220
		202	56.1			83	20.9		
		243	67.4			80	23.1		
	A	113	31.3	29.4	72	12.5	22		
		188	52.2	27.2	81	17.2			
		226	62.7	24.2	78	19.1			
	B	105	29.1	25.3	70	10.3	18.5		
		174	48.4	23.4	79	14.1			
		209	58.1	20.8	76	15.6			
	C	97	27.0	21.8	68	8.5	15		
		162	44.9	20.2	77	11.5			
		194	53.9	17.9	74	12.8			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

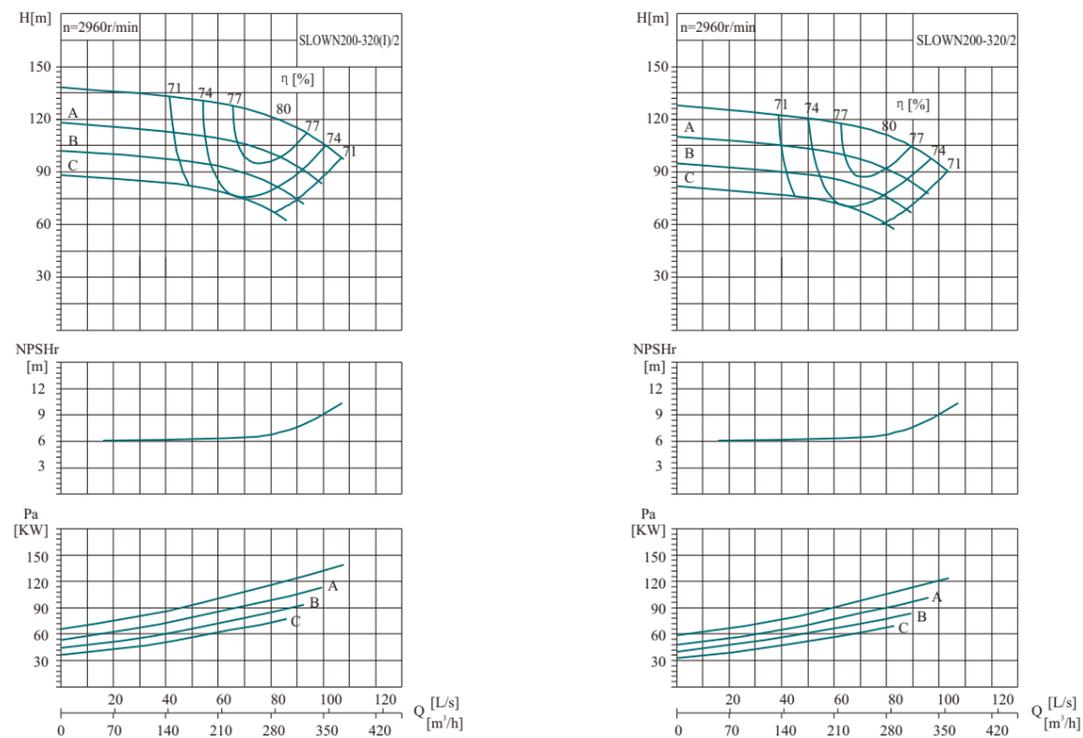


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN200-320(I)2		174	48.3	129.6	7	2960	71	86.5	160	300
		290	80.6	120.0			80	118.4		
		348	96.7	106.8			77	131.4		
	A	161	44.7	110.9			69	70.4	132	
		268	74.5	102.7			78	96.1		
		322	89.4	91.4			75	106.8		
	B	150	41.6	95.9			67	58.3	110	
		249	69.3	88.8			76	79.3		
		299	83.1	79.0			73	88.2		
	C	139	38.7	82.9			65	48.4	90	
		232	64.4	76.8			74	65.5		
		278	77.3	68.4			71	73.0		
SLOWN200-320/2		167	46.5	120.1	7	2960	71	77.1	132	300
		279	77.5	111.2			80	105.6		
		335	93.0	98.9			77	117.2		
	A	155	43.1	103.2			69	63.2	110	
		259	71.9	95.6			78	86.3		
		311	86.3	85.1			75	95.9		
	B	144	40.1	89.3			67	52.4	90	
		241	66.9	82.7			76	71.3		
		289	80.2	73.6			73	79.2		
	C	134	37.2	76.8			65	43.1	75	
		223	62.0	71.1			74	58.4		
		268	74.4	63.3			71	65.1		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

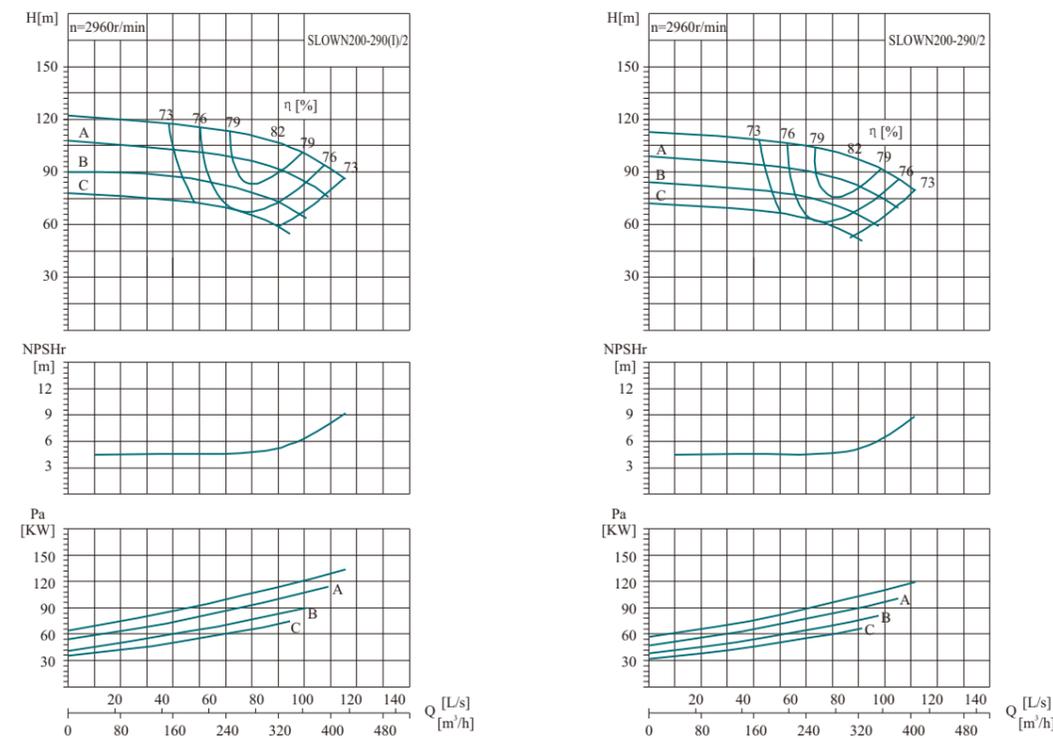


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN200-290(I)2		195	54.2	114.5	5.5	2960	73	83.2	132	290
		325	90.3	106.0			82	114.4		
		390	108.3	94.3			79	126.8		
	A	183	50.9	101.2			71	71.1	110	
		306	84.9	93.7			80	97.4		
		367	101.8	83.4			77	108.0		
	B	168	46.6	84.7			69	56.0	90	
		280	77.6	78.4			78	76.5		
		321	89.3	69.8			75	81.4		
	C	156	43.3	73.3			67	46.4	75	
		260	72.2	67.8			76	63.2		
		312	86.7	60.4			73	70.2		
SLOWN200-290/2		188	52.1	106.1	5.5	2960	73	74.2	132	290
		313	86.9	98.2			82	102.0		
		375	104.3	87.4			79	113.0		
	A	176	48.8	92.7			71	62.4	110	
		293	81.3	85.9			80	85.5		
		351	97.5	76.4			77	94.8		
	B	162	45.0	78.9			69	50.4	90	
		270	74.9	73.0			78	68.7		
		324	89.9	65.0			75	76.4		
	C	150	41.7	67.9			67	41.4	75	
		250	69.5	62.8			76	56.3		
		300	83.4	55.9			73	62.6		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

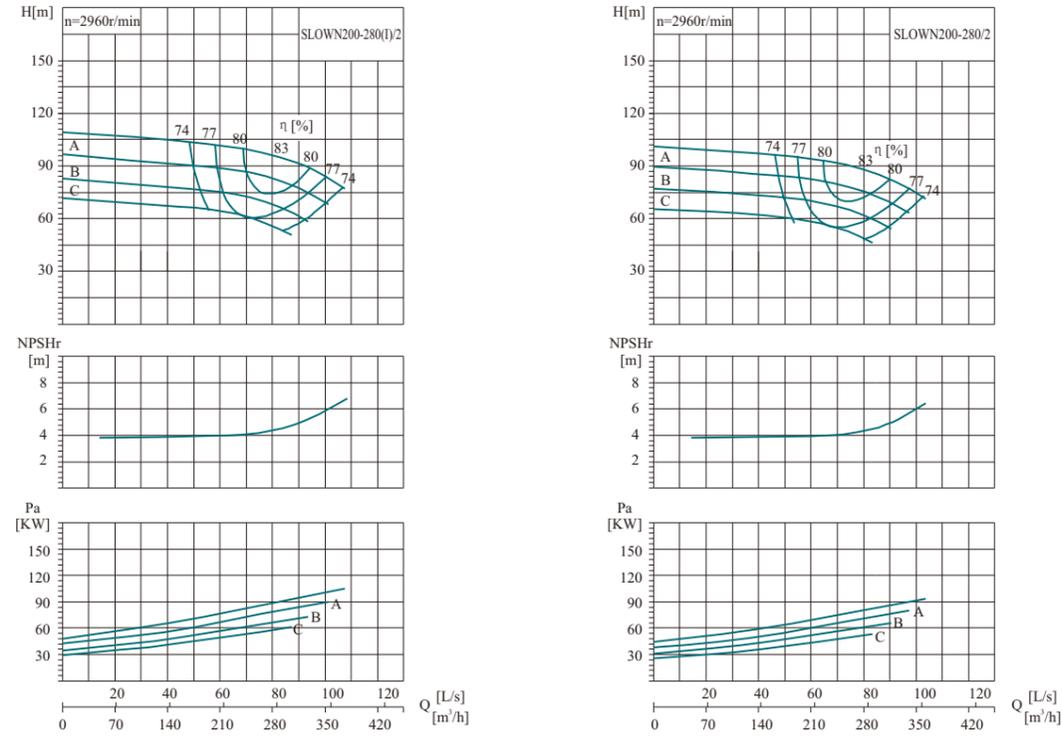


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN200-280(I)/2		174	48.3	102.6	4.7	74	65.7	132	260
		290	80.6	95.0		83	90.4		
		334	92.6	84.6		80	95.9		
	A	164	45.4	90.7		72	56.1	110	
		273	75.7	83.9		81	76.9		
		327	90.9	74.7		78	85.3		
	B	151	42.1	77.7		70	45.7	90	
		252	70.1	71.9		79	62.5		
		303	84.1	64.0		76	69.4		
	C	141	39.2	67.3		68	38.0	75	
		235	65.3	62.3		77	51.8		
		282	78.3	55.5		74	57.5		
SLOWN200-280/2		167	46.5	95.0	4.7	74	58.6	110	260
		279	77.5	88.0		83	80.6		
		335	93.0	78.3		80	89.3		
	A	157	43.7	84.0		72	50.0	90	
		262	72.9	77.8		81	68.6		
		315	87.5	69.2		78	76.1		
	B	146	40.6	72.4		70	41.1	75	
		244	67.7	67.0		79	56.3		
		292	81.2	59.7		76	62.5		
	C	135	37.5	61.6		68	33.3	55	
		225	62.4	57.1		77	45.3		
		270	74.9	50.8		74	50.4		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

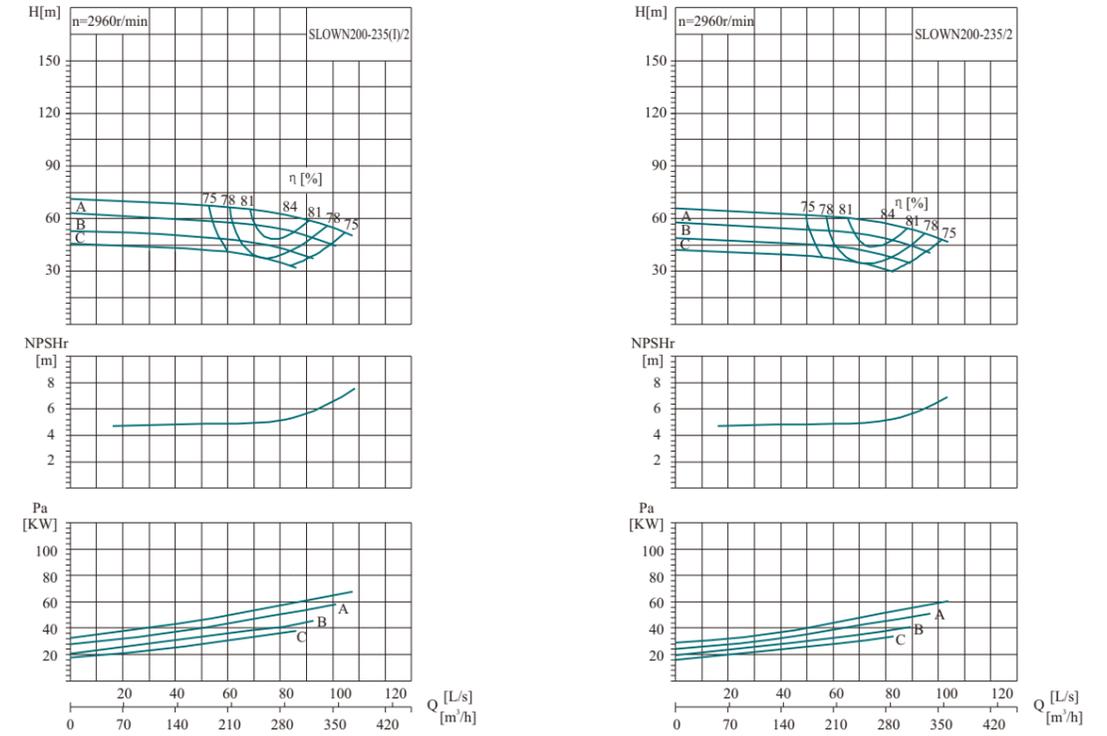


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN200-235(I)/2		174	48.3	67.0	5.5	75	42.3	75	210
		290	80.6	62.0		84	58.3		
		348	96.7	55.2		81	64.5		
	A	164	45.4	59.2		73	36.1	75	
		273	75.7	54.8		82	49.6		
		327	90.9	48.8		79	55.0		
	B	150	41.6	49.5		71	28.4	55	
		249	69.3	45.9		80	38.9		
		287	79.7	40.8		77	41.4		
	C	139	38.7	42.9		69	23.5	45	
		232	64.4	39.7		78	32.1		
		278	77.3	35.3		75	35.7		
SLOWN200-235/2		167	46.5	62.0	5.5	75	37.7	75	210
		279	77.5	57.4		84	52.0		
		335	93.0	51.1		81	57.5		
	A	157	43.5	54.2		73	31.7	55	
		261	72.5	50.2		82	43.5		
		313	87.0	44.7		79	48.2		
	B	144	40.1	46.1		71	25.5	45	
		241	66.9	42.7		80	35.0		
		289	80.2	38.0		77	38.8		
	C	134	37.2	39.7		69	21.0	37	
		223	62.0	36.8		78	28.6		
		268	74.4	32.7		75	31.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

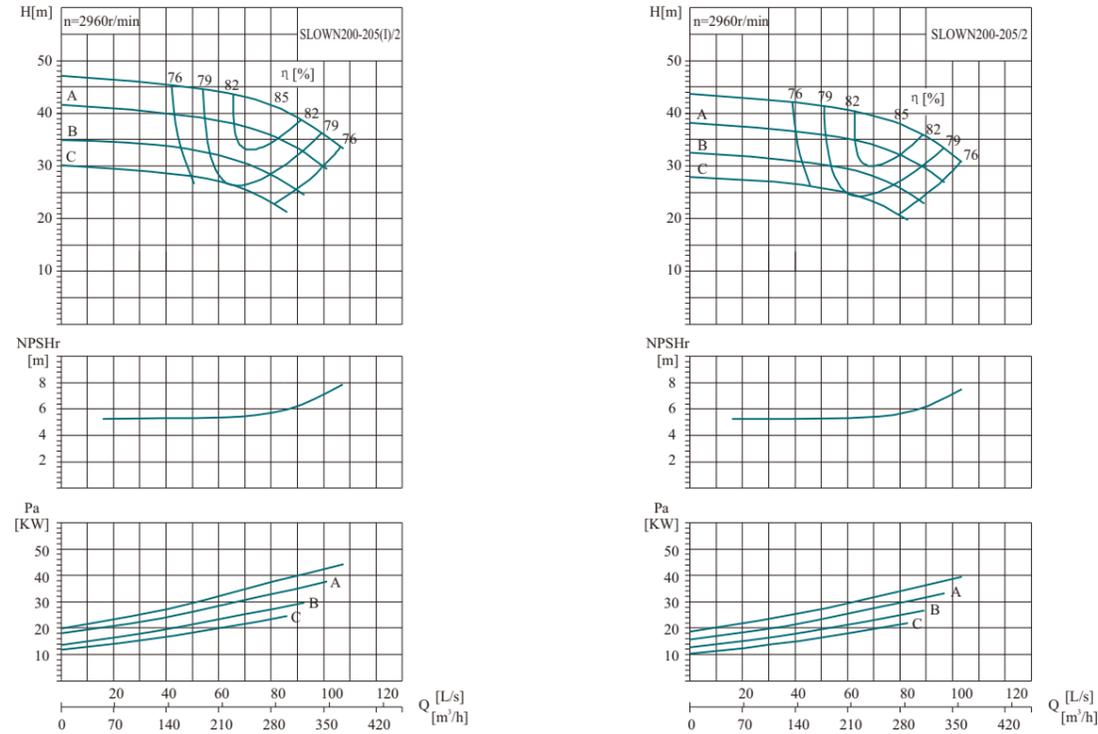


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN200-205(I)/2		174	48.3	44.3	2960	76	27.6	55	205
		290	80.6	41.0		85	38.1		
		328	91.0	36.5		82	39.7		
	A	164	45.4	39.1		74	23.5	45	
		273	75.7	36.2		83	32.4		
		327	90.9	32.2		80	35.9		
	B	150	41.6	32.7		72	18.5	37	
		249	69.3	30.3		81	25.4		
		287	79.7	27.0		78	27.0		
	C	139	38.7	28.3		70	15.3	30	
		232	64.4	26.2		79	21.0		
		278	77.3	23.4		76	23.3		
SLOWN200-205/2		167	46.5	41.0	2960	76	24.6	45	205
		279	77.5	38.0		85	34.0		
		335	93.0	33.8		82	37.6		
	A	157	43.5	35.9		74	20.7	37	
		261	72.5	33.2		83	28.4		
		313	87.0	29.6		80	31.5		
	B	144	40.1	30.5		72	16.7	30	
		241	66.9	28.2		81	22.8		
		289	80.2	25.1		78	25.3		
	C	134	37.2	26.3		70	13.7	30	
		223	62.0	24.3		79	18.7		
		268	74.4	21.6		76	20.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

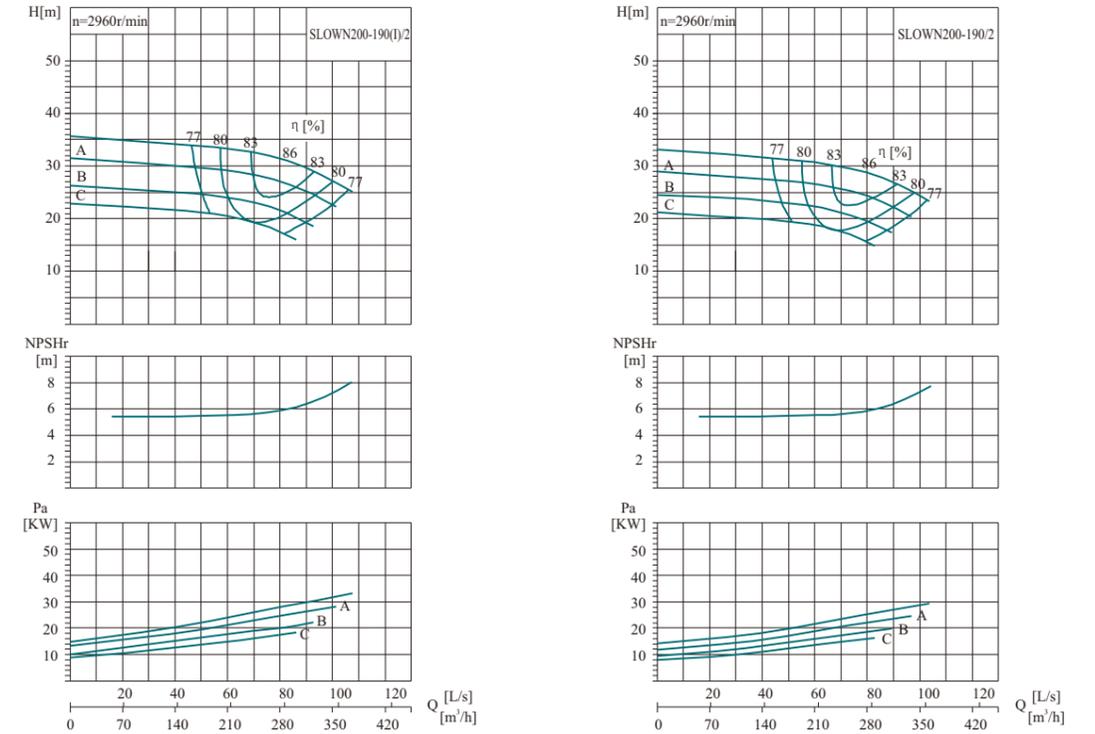


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN200-190(I)/2		174	48.3	33.5	2960	77	20.6	37	180
		290	80.6	31.0		86	28.5		
		328	91.0	27.6		83	29.7		
	A	164	45.4	29.6		75	17.6	30	
		273	75.7	27.4		84	24.2		
		327	90.9	24.4		81	26.8		
	B	150	41.6	24.8		73	13.8	30	
		249	69.3	22.9		82	19.0		
		287	79.7	20.4		79	20.2		
	C	139	38.7	21.4		71	11.4	22	
		232	64.4	19.8		80	15.7		
		278	77.3	17.7		77	17.4		
SLOWN200-190/2		167	46.5	31.0	2960	77	18.4	37	180
		279	77.5	28.7		86	25.4		
		335	93.0	25.6		83	28.1		
	A	157	43.5	27.1		75	15.4	30	
		261	72.5	25.1		84	21.2		
		313	87.0	22.3		81	23.5		
	B	144	40.1	23.1		73	12.4	22	
		241	66.9	21.4		82	17.1		
		289	80.2	19.0		79	18.9		
	C	134	37.2	19.9		71	10.2	18.5	
		223	62.0	18.4		80	14.0		
		268	74.4	16.4		77	15.5		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

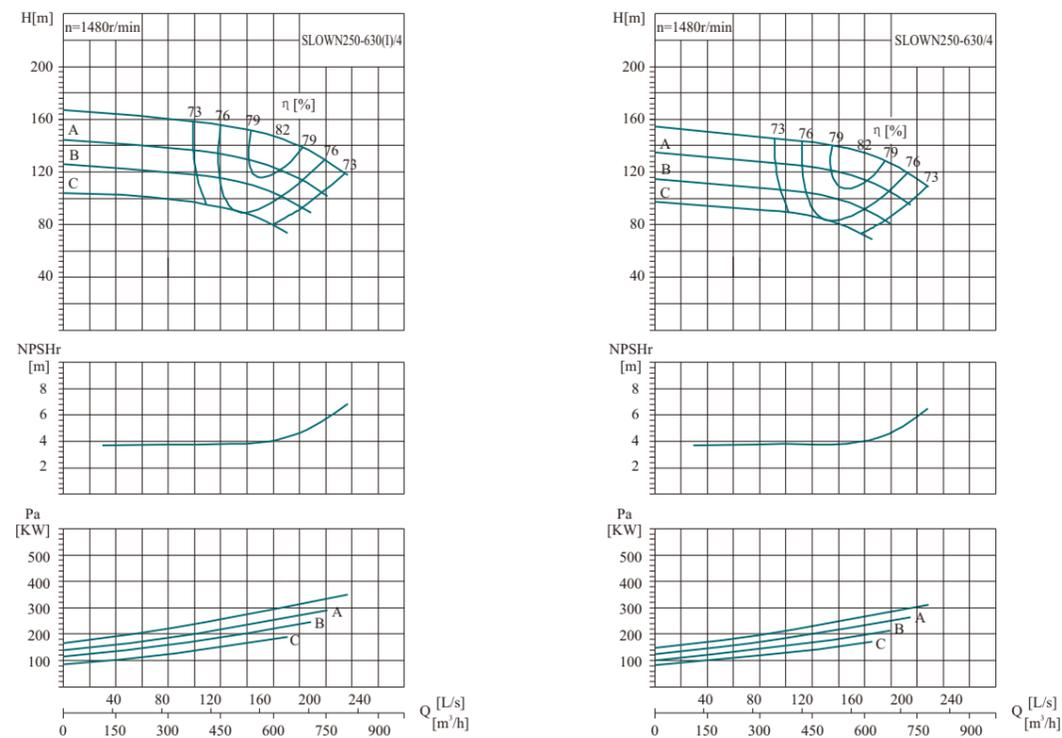


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-630(I)4	A	375	104.2	155.2	1480	73	217.0	355	1000
		625	173.6	145.0		82	300.9		
		750	208.3	129.1		79	333.5		
		349	96.9	134.2		71	179.4	315	
		581	161.5	125.4		80	248.0		
		698	193.8	111.6		77	275.2		
	B	326	90.6	117.4	69	151.2	250		
		544	151.0	109.8	78	208.3			
		653	181.3	97.7	75	231.3			
	C	296	82.3	96.8	67	116.6	200		
		494	137.2	90.5	76	160.0			
		568	157.7	80.5	73	170.5			
SLOWN250-630/4	A	361	100.3	145.1	1480	73	195.3	315	1000
		602	167.1	134.3		82	268.3		
		722	200.5	119.6		79	297.4		
		338	93.8	126.8		71	164.1	280	
		563	156.3	117.5		80	224.8		
		675	187.5	104.5		77	249.4		
	B	311	86.5	107.9	69	132.5	250		
		519	144.1	99.9	78	180.8			
		623	172.9	88.9	75	200.9			
	C	287	79.7	91.6	67	106.8	185		
		478	132.8	84.9	76	145.3			
		574	159.4	75.5	73	161.6			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

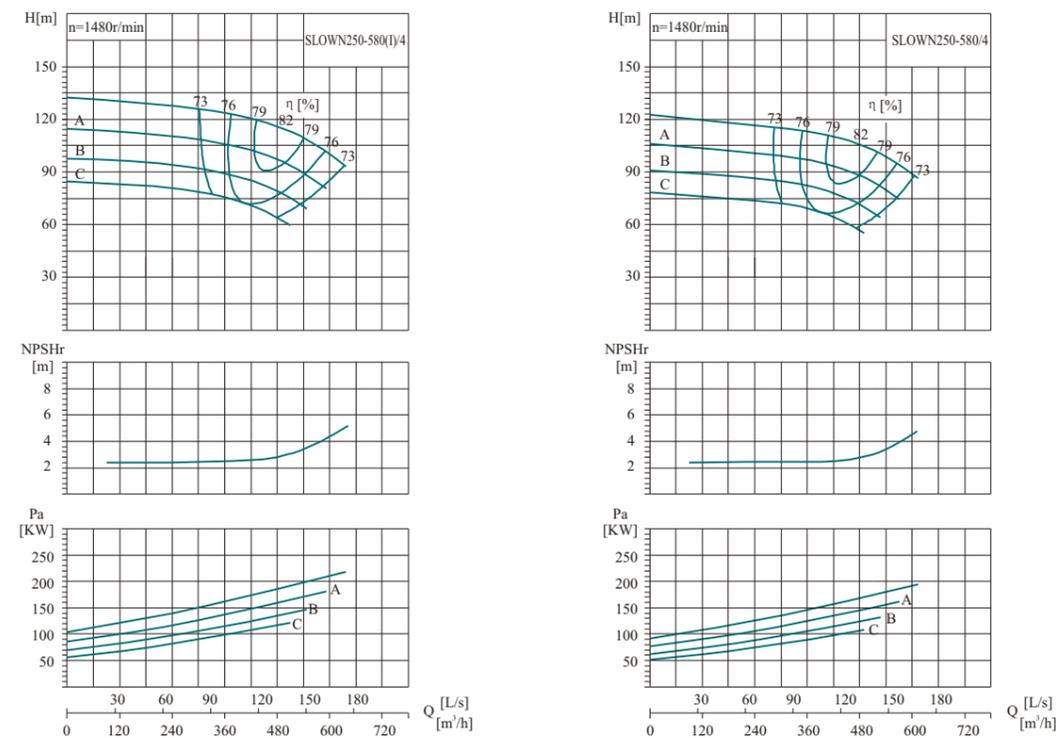


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-580(I)4	A	294	81.7	124.2	1480	73	136.2	220	700
		490	136.1	115.0		82	187.1		
		588	163.3	102.4		79	207.4		
		273	76.0	107.4		71	112.6	185	
		456	126.6	99.5		80	154.2		
		547	151.9	88.5		77	171.1		
	B	253	70.2	91.9	69	91.6	160		
		421	117.1	85.1	78	125.1			
		506	140.5	75.7	75	138.9			
	C	235	65.3	79.5	67	76.0	132		
		392	108.9	73.6	76	103.3			
		459	127.4	65.5	73	112.0			
SLOWN250-580/4	A	283	78.6	115.1	1480	73	121.4	200	700
		472	131.0	106.5		82	166.8		
		566	157.2	94.8		79	184.9		
		263	73.1	99.5		71	100.4	185	
		439	121.8	92.1		80	137.5		
		526	146.2	82.0		77	152.5		
	B	244	67.8	85.6	69	82.4	160		
		407	113.0	79.2	78	112.4			
		488	135.6	70.5	75	124.9			
	C	226	62.9	73.6	67	67.7	132		
		377	104.8	68.2	76	92.1			
		453	125.8	60.7	73	102.5			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

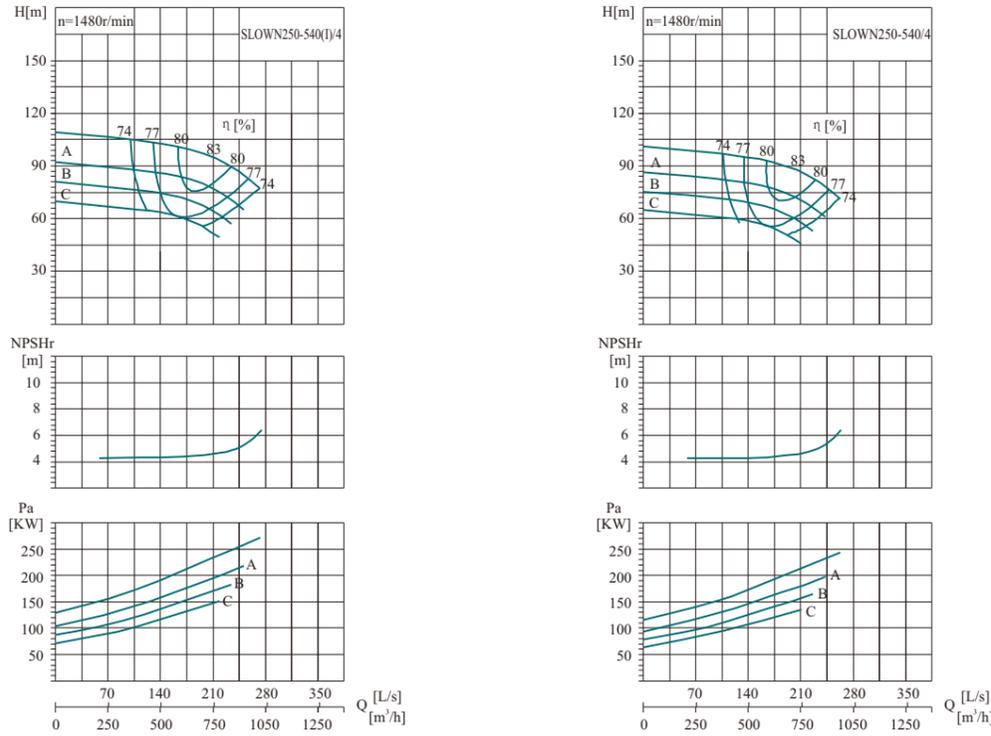


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-540(I)/4		450	125.0	101.7	1480	74	168.3	280	800
		750	208.3	95.0		83	233.7		
		900	250.0	84.6		80	258.9		
	A	414	115.0	86.0		72	134.7	220	
		690	191.7	80.4		81	186.5		
		828	230.0	71.6		78	206.8		
	B	387	107.5	75.2		70	113.1	200	
		645	179.2	70.3		79	156.2		
		774	215.0	62.5		76	173.4		
	C	360	100.0	65.1		68	93.8	160	
		600	166.7	60.8		77	129.0		
		720	200.0	54.1		74	143.3		
SLOWN250-540/4		433	120.3	95.0	1480	74	151.4	250	800
		722	200.5	88.0		83	208.4		
		866	240.6	78.3		80	230.9		
	A	401	111.3	81.3		72	123.1	200	
		668	185.4	75.2		81	168.8		
		801	222.5	67.0		78	187.2		
	B	374	103.8	70.7		70	102.7	185	
		623	172.9	65.4		79	140.4		
		747	207.5	58.2		76	155.8		
	C	347	96.3	60.8		68	84.4	160	
		578	160.4	56.3		77	115.0		
		693	192.5	50.1		74	127.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

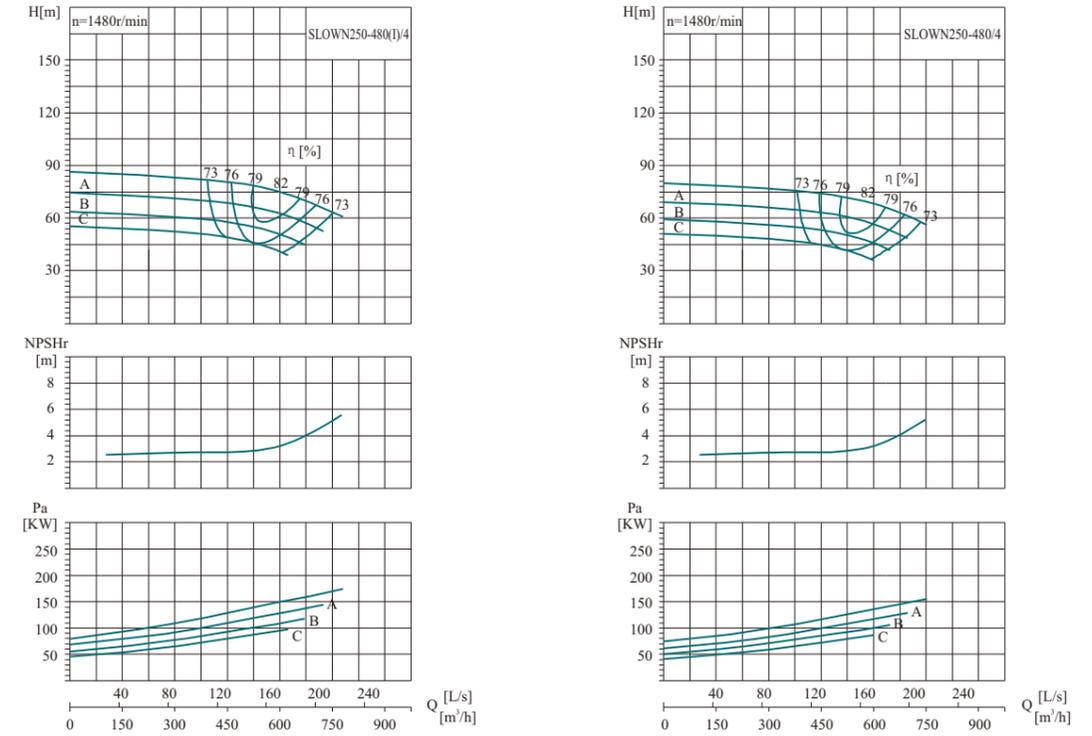


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-480(I)/4		360	100.0	81.0	1480	73	108.7	185	800
		600	166.7	75.0		82	149.4		
		690	191.7	66.8		79	158.7		
	A	335	93.0	70.1		71	89.9	160	
		558	155.0	64.9		80	123.2		
		670	186.0	57.7		77	136.7		
	B	310	86.0	59.9		69	73.2	132	
		516	143.3	55.5		78	99.9		
		619	172.0	49.4		75	111.0		
	C	288	80.0	51.8		67	60.7	110	
		480	133.3	48.0		76	82.5		
		576	160.0	42.7		73	91.8		
SLOWN250-480/4		347	96.3	75.0	1480	73	97.0	160	800
		578	160.4	69.5		82	133.2		
		693	192.5	61.8		79	147.7		
	A	322	89.5	64.9		71	80.2	132	
		537	149.2	60.1		80	109.8		
		644	179.0	53.5		77	121.8		
	B	299	83.0	55.8		69	65.8	110	
		498	138.3	51.7		78	89.8		
		598	166.0	46.0		75	99.7		
	C	277	77.0	48.0		67	54.1	90	
		462	128.3	44.5		76	73.6		
		554	154.0	39.6		73	81.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

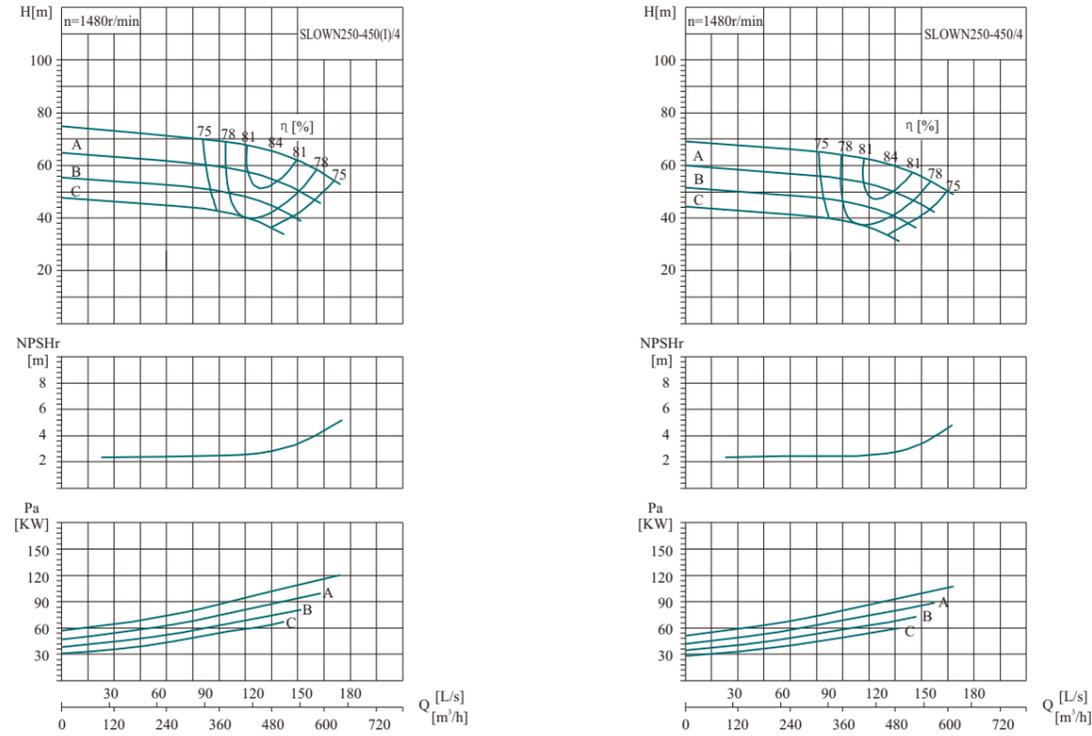


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-450(I)/4		294	81.7	70.2	3	75	74.9	132	500
		490	136.1	65.0		84	103.2		
		588	163.3	57.9		81	114.3		
	A	273	76.0	60.7		73	61.9	110	
		456	126.6	56.2		82	85.0		
		547	151.9	50.0		79	94.3		
	B	253	70.2	51.9		71	50.3	90	
		421	117.1	48.1		80	68.9		
		506	140.5	42.8		77	76.5		
	C	235	65.3	44.9		69	41.7	75	
		392	108.9	41.6		78	56.9		
		459	127.4	37.0		75	61.6		
SLOWN250-450/4		283	78.6	65.0	3	75	66.8	110	500
		472	131.0	60.2		84	92.0		
		566	157.2	53.6		81	101.9		
	A	263	73.1	56.2		73	55.2	90	
		439	121.8	52.1		82	75.8		
		526	146.2	46.3		79	84.0		
	B	244	67.8	48.4		71	45.2	75	
		407	113.0	44.8		80	62.0		
		488	135.6	39.9		77	68.8		
	C	226	62.9	41.6		69	37.2	75	
		377	104.8	38.5		78	50.7		
		453	125.8	34.3		75	56.4		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

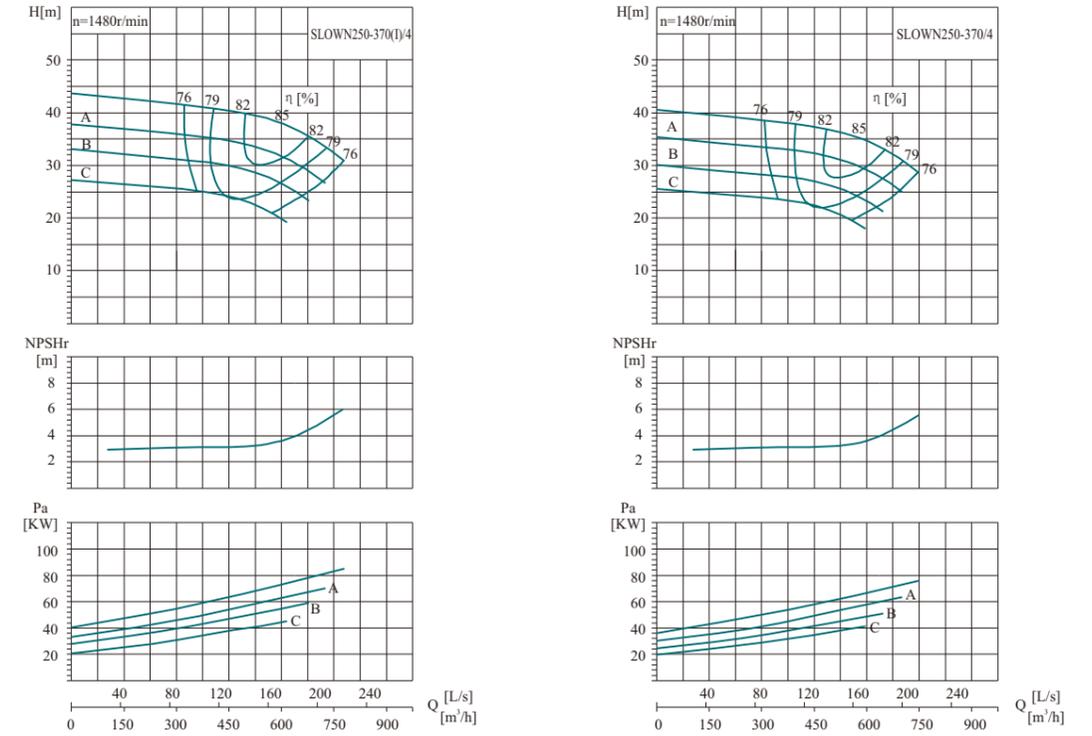


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-370(I)/4		360	100.0	40.7	3.6	76	52.4	90	440
		600	166.7	38.0		85	73.0		
		720	200.0	33.8		82	80.8		
	A	335	93.0	35.2		74	43.3	75	
		558	155.0	32.9		83	60.1		
		670	186.0	29.3		80	66.6		
	B	313	87.0	30.8		72	36.4	75	
		522	145.0	28.8		81	50.5		
		626	174.0	25.6		78	56.0		
	C	284	79.0	25.4		70	28.1	55	
		474	131.7	23.7		79	38.7		
		545	151.4	21.1		76	41.2		
SLOWN250-370/4		347	96.3	38.0	3.6	76	47.2	90	440
		578	160.4	35.2		85	65.1		
		693	192.5	31.3		82	72.1		
	A	324	90.0	33.2		74	39.6	75	
		540	150.0	30.8		83	54.5		
		648	180.0	27.4		80	60.4		
	B	299	83.0	28.3		72	31.9	55	
		498	138.3	26.2		81	43.8		
		598	166.0	23.3		78	48.6		
	C	275	76.5	24.0		70	25.7	45	
		459	127.5	22.2		79	35.2		
		551	153.0	19.8		76	39.0		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

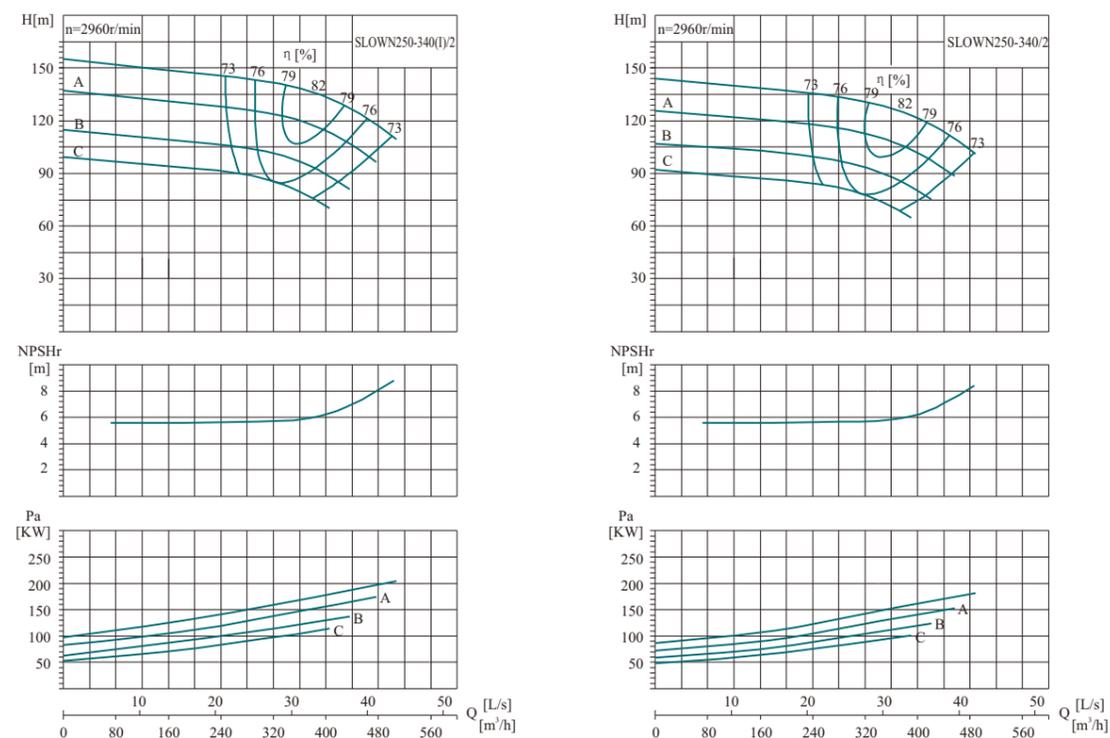


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-340(I)/2		234	65.0	145.8	6.2	73	127.2	220	450
		390	108.3	135.0		82	174.8		
		468	130.0	120.2		79	193.8		
	A	220	61.1	128.8	71	108.6	185		
		367	101.8	119.3	80	148.8			
		440	122.2	106.2	77	165.1			
	B	201	55.9	107.8	69	85.6	160		
		335	93.2	99.8	78	116.9			
		386	107.1	88.9	75	124.4			
	C	187	52.0	93.3	67	71.0	132		
		312	86.7	86.4	76	96.6			
		374	104.0	76.9	73	107.4			
SLOWN250-340/2		225	62.6	135.1	6.2	73	113.4	185	450
		375	104.3	125.1		82	155.9		
		450	125.1	111.3		79	172.8		
	A	211	58.5	118.1	71	95.4	160		
		351	97.5	109.4	80	130.6			
		421	117.0	97.3	77	144.9			
	B	194	54.0	100.4	69	77.0	132		
		324	89.9	93.0	78	105.1			
		388	107.9	82.8	75	116.7			
	C	180	50.1	86.4	67	63.3	110		
		300	83.4	80.0	76	86.1			
		360	100.1	71.2	73	95.7			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

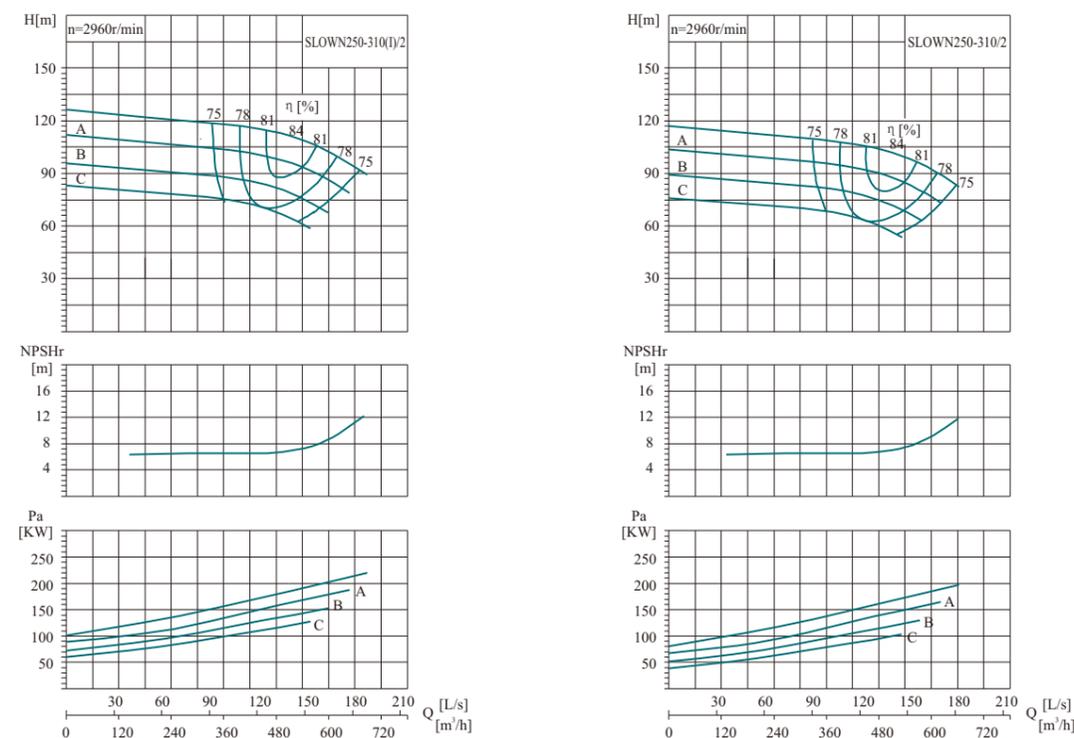


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-310(I)/2		318	88.3	118.8	7.6	75	137.1	220	350
		530	147.2	110.0		84	188.9		
		610	169.3	97.9		81	200.5		
	A	299	83.0	105.0	73	117.0	185		
		498	138.4	97.2	82	160.8			
		598	166.1	86.5	79	178.2			
	B	277	76.9	89.9	71	95.4	160		
		461	128.1	83.3	80	130.6			
		553	153.7	74.1	77	145.0			
	C	258	71.6	77.9	69	79.2	132		
		429	119.3	72.2	78	108.1			
		515	143.1	64.2	75	120.1			
SLOWN250-310/2		306	85.0	110.1	7.6	75	122.3	200	350
		510	141.7	101.9		84	168.5		
		612	170.0	90.7		81	186.6		
	A	288	79.9	97.3	73	104.4	160		
		480	133.2	90.1	82	143.5			
		576	159.9	80.2	79	159.0			
	B	267	74.2	83.8	71	85.9	132		
		445	123.7	77.6	80	117.6			
		534	148.4	69.1	77	130.5			
	C	246	68.5	71.4	69	69.4	110		
		411	114.1	66.1	78	94.7			
		493	136.9	58.8	75	105.2			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

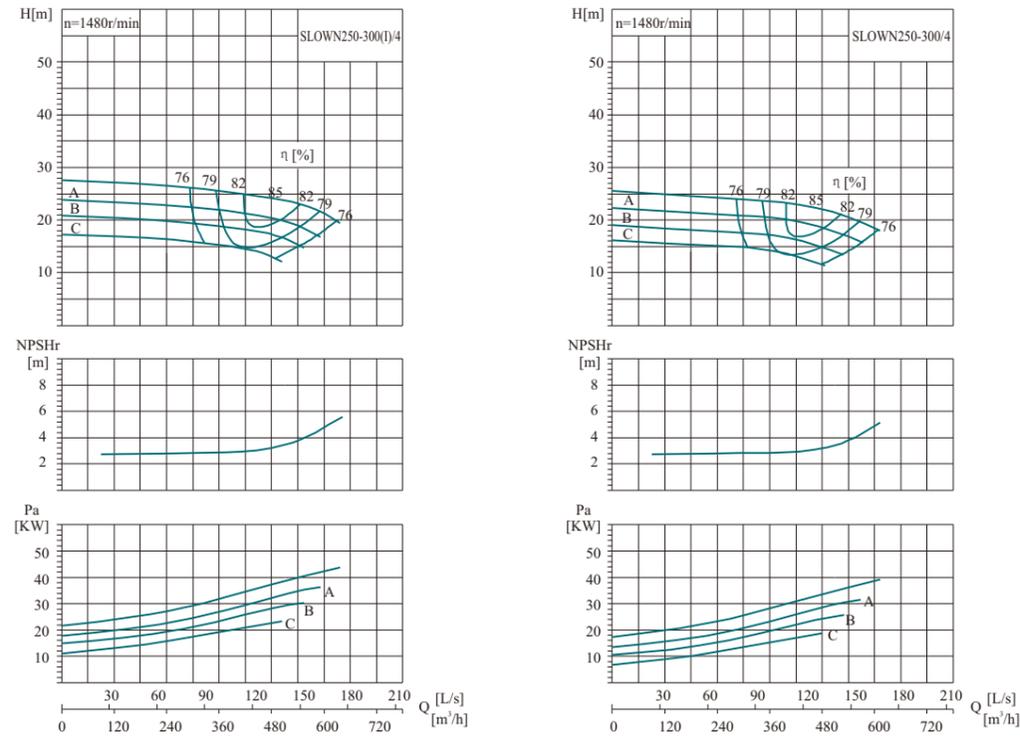


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN250-300(I)/4		294	81.7	25.7	3.3	1480	76	27.0	45	390
		490	136.1	24.0			85	37.7		
		588	163.3	21.4			82	41.7		
	A	273	76.0	22.2			74	22.3	37	
		456	126.6	20.8			83	31.0		
		547	151.9	18.5			80	34.4		
	B	256	71.1	19.4			72	18.8	30	
		426	118.4	18.2			81	26.0		
		512	142.1	16.2			78	28.9		
	C	232	64.5	16.0			70	14.5	30	
		387	107.5	15.0			79	20.0		
		445	123.7	13.3			76	21.3		
SLOWN250-300/4		283	78.6	24.0	3.3	1480	76	24.3	45	390
		472	131.0	22.2			85	33.6		
		566	157.2	19.8			82	37.2		
	A	265	73.5	21.0			74	20.4	37	
		441	122.5	19.4			83	28.1		
		529	147.0	17.3			80	31.2		
	B	244	67.8	17.9			72	16.5	30	
		407	113.0	16.5			81	22.6		
		488	135.6	14.7			78	25.1		
	C	225	62.5	15.2			70	13.3	22	
		375	104.1	14.0			79	18.1		
		450	125.0	12.5			76	20.1		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

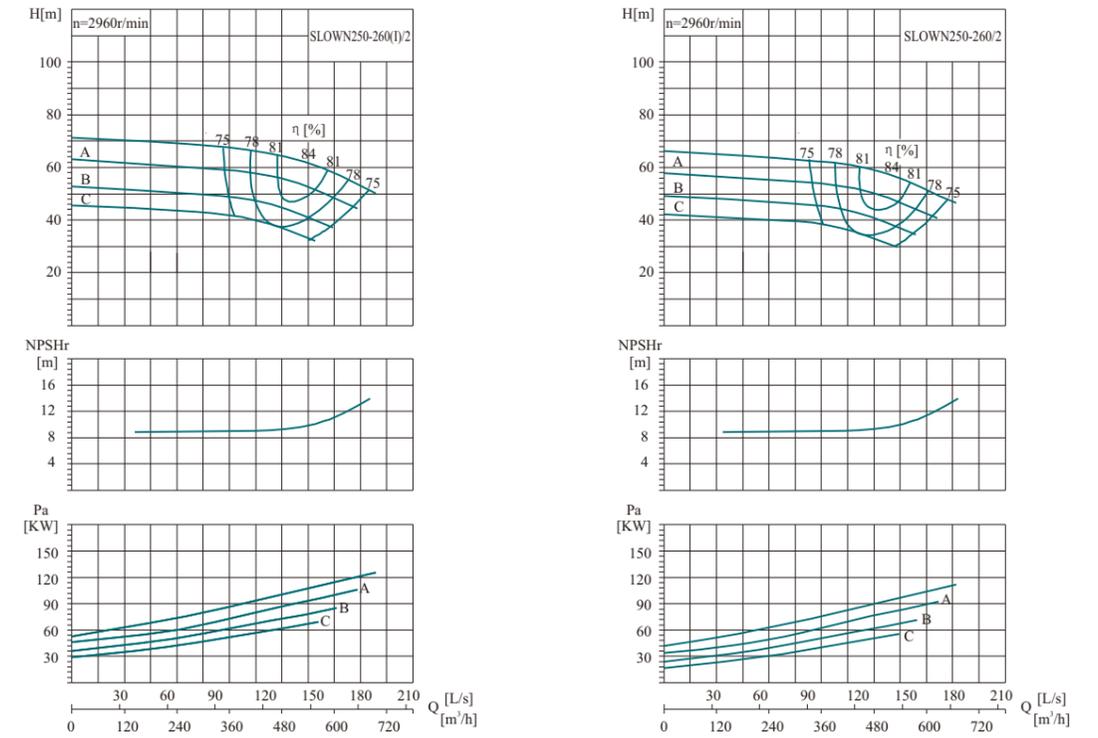


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN250-260(I)/2		320	89.0	67.0	9	2960	75	77.9	132	240
		534	148.3	62.0			84	107.3		
		641	178.0	55.2			81	118.8		
	A	301	83.7	59.2			73	66.4	110	
		502	139.4	54.8			82	91.3		
		602	167.3	48.8			79	101.2		
	B	276	76.5	49.5			71	52.3	90	
		459	127.6	45.9			80	71.7		
		528	146.7	40.8			77	76.2		
	C	256	71.2	42.9			69	43.3	75	
		427	118.7	39.7			78	59.2		
		513	142.4	35.3			75	65.7		
SLOWN250-260/2		308	85.7	62.0	9	2960	75	69.4	132	240
		514	142.8	57.4			84	95.7		
		617	171.3	51.1			81	106.0		
	A	288	80.1	54.2			73	58.3	110	
		481	133.5	50.2			82	80.1		
		577	160.2	44.7			79	88.8		
	B	266	73.9	46.1			71	47.0	75	
		443	123.1	42.7			80	64.4		
		532	147.7	38.0			77	71.5		
	C	247	68.5	39.7			69	38.6	75	
		411	114.2	36.8			78	52.8		
		493	137.1	32.7			75	58.6		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

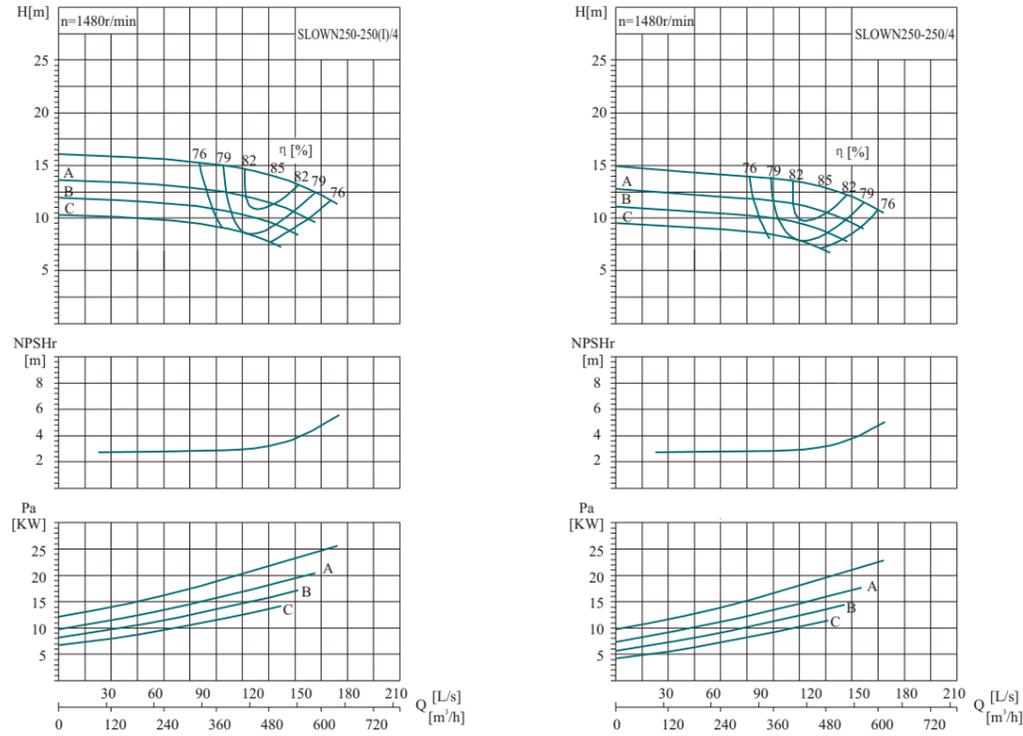


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN250-250(I)4		294	81.7	15.4	3.6	76	16.2	30	310
		490	136.1	14.0		85	22.0		
		588	163.3	12.5		82	24.3		
	A	270	75.1	13.0		74	13.0	22	
		451	125.2	11.8		83	17.5		
		541	150.3	10.5		80	19.4		
	B	253	70.2	11.4		72	10.9	18.5	
		421	117.1	10.4		81	14.7		
		506	140.5	9.2		78	16.3		
	C	235	65.3	9.9		70	9.0	15	
		392	108.9	9.0		79	12.1		
		470	130.7	8.0		76	13.4		
SLOWN250-250/4		283	78.6	14.0	3.6	76	14.2	30	310
		472	131.0	13.0		85	19.6		
		566	157.2	11.5		82	21.7		
	A	262	72.7	12.0		74	11.5	18.5	
		436	121.1	11.1		83	15.9		
		523	145.4	9.9		80	17.6		
	B	244	67.8	10.4		72	9.6	18.5	
		407	113.0	9.6		81	13.2		
		488	135.6	8.6		78	14.6		
	C	226	62.9	9.0		70	7.9	15	
		377	104.8	8.3		79	10.8		
		453	125.8	7.4		76	12.0		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

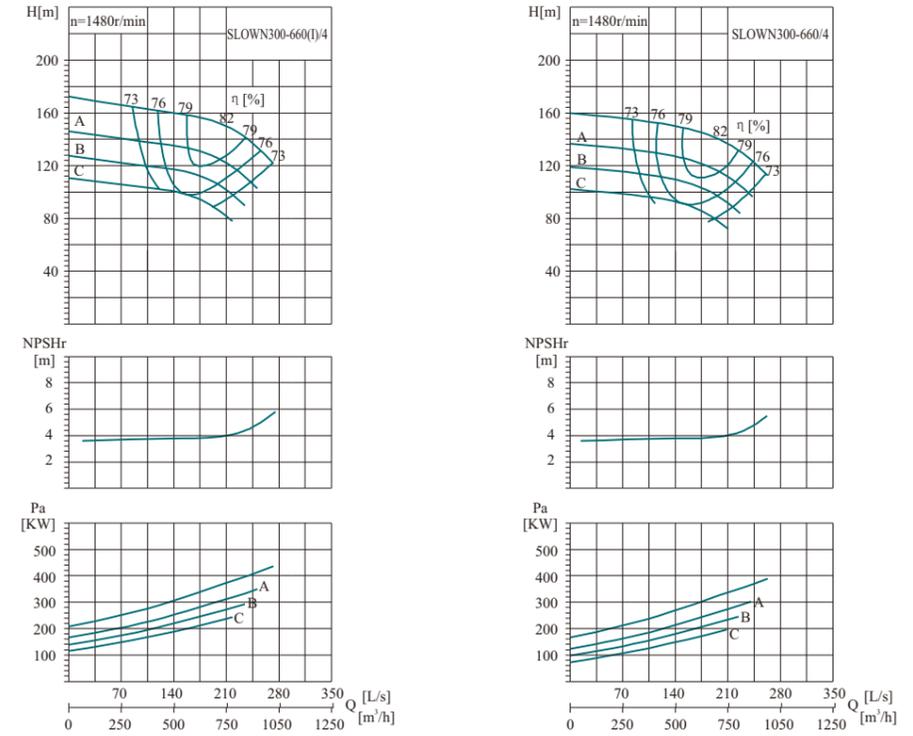


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN300-660(I)4		450	125.0	157.5	4	73	264.3	500	1120
		750	208.3	150.0		82	373.5		
		900	250.0	133.5		79	414.0		
	A	414	115.0	133.3		71	211.6	400	
		690	191.7	127.0		80	298.1		
		828	230.0	113.0		77	330.8		
	B	387	107.5	116.5		69	177.9	315	
		645	179.2	110.9		78	249.7		
		774	215.0	98.7		75	277.4		
	C	360	100.0	100.8		67	147.4	280	
		600	166.7	96.0		76	206.3		
		720	200.0	85.4		73	229.4		
SLOWN300-660/4		433	120.3	150.1	4	73	242.4	450	1120
		722	200.5	139.0		82	333.0		
		866	240.6	123.7		79	369.2		
	A	401	111.3	128.3		71	197.0	355	
		668	185.4	118.8		80	269.9		
		801	222.5	105.7		77	299.5		
	B	374	103.8	111.6		69	164.5	280	
		623	172.9	103.3		78	224.5		
		747	207.5	92.0		75	249.4		
	C	347	96.3	96.0		67	135.2	250	
		578	160.4	88.9		76	184.0		
		693	192.5	79.2		73	204.5		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

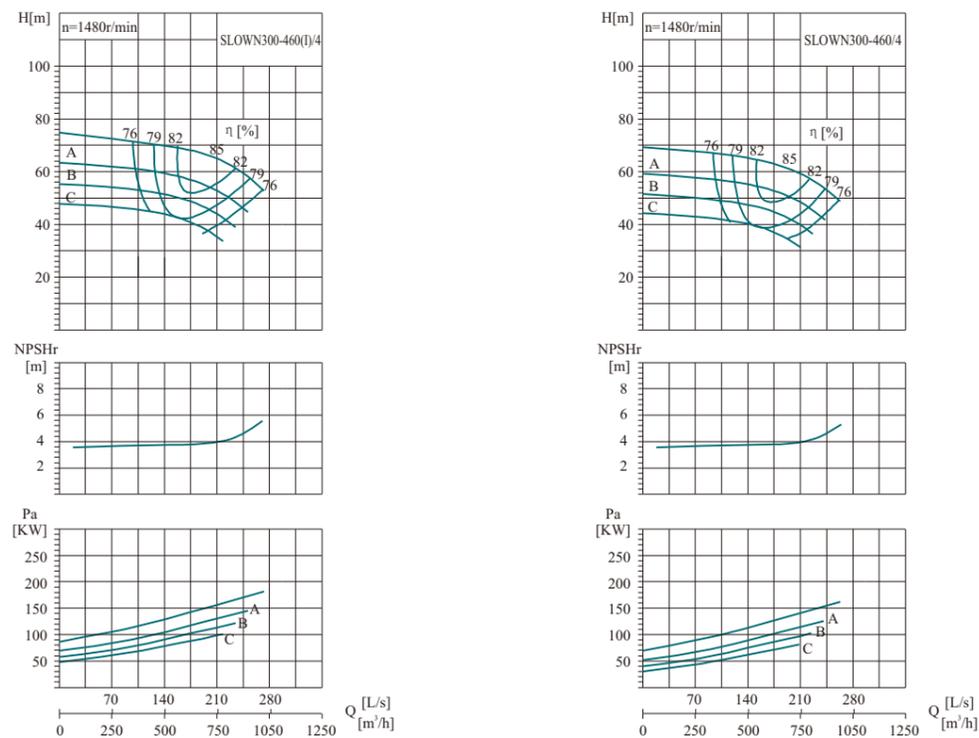


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN300-460(I)/4		450	125.0	68.9	1480	76	111.1	200	600
		750	208.3	65.0		85	156.1		
		900	250.0	57.9		82	172.8		
	A	414	115.0	60.5		74	92.2	160	
		690	191.7	55.0		83	124.5		
		828	230.0	49.0		80	138.0		
	B	387	107.5	52.9		72	77.4	132	
		645	179.2	48.1		81	104.2		
		774	215.0	42.8		78	115.6		
	C	360	100.0	45.8		70	64.1	110	
		600	166.7	41.6		79	86.0		
		720	200.0	37.0		76	95.5		
SLOWN300-460/4		433	120.3	65.0	1480	76	100.9	185	600
		722	200.5	60.2		85	139.2		
		866	240.6	53.6		82	154.1		
	A	401	111.3	55.6		74	81.9	132	
		668	185.4	51.5		83	112.7		
		801	222.5	45.8		80	124.9		
	B	374	103.8	48.4		72	68.3	110	
		623	172.9	44.8		81	93.7		
		747	207.5	39.9		78	103.9		
	C	347	96.3	41.6		70	56.1	90	
		578	160.4	38.5		79	76.7		
		693	192.5	34.3		76	85.1		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

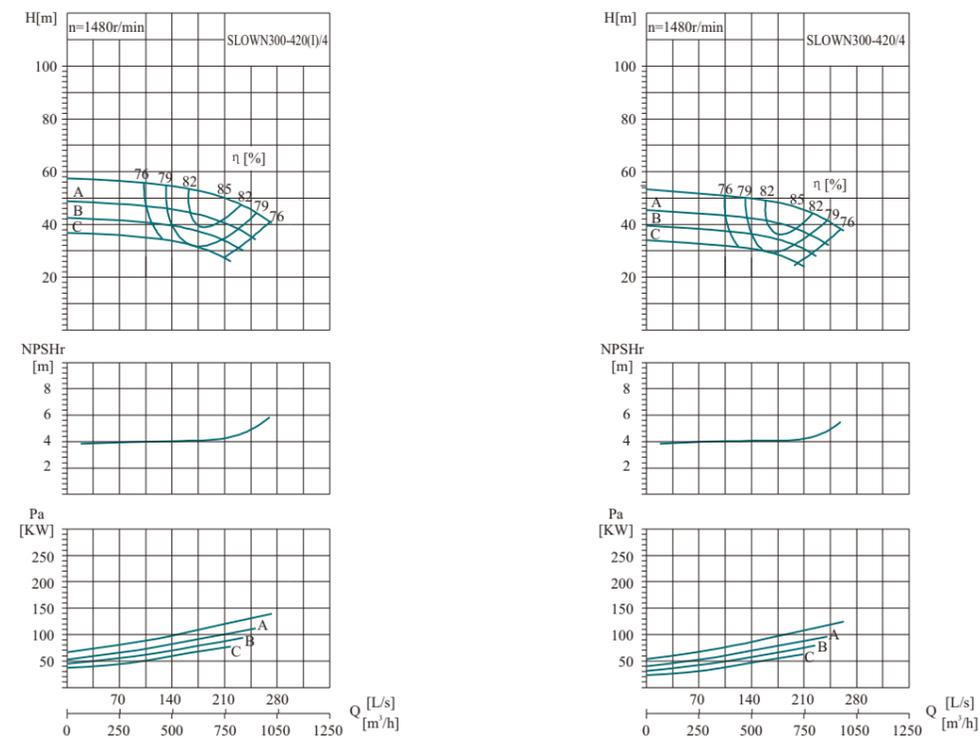


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN300-420(I)/4		450	125.0	55.0	1480	76	88.7	160	620
		750	208.3	50.0		85	120.1		
		900	250.0	44.5		82	133.0		
	A	414	115.0	46.6		74	70.9	132	
		690	191.7	42.3		83	95.8		
		828	230.0	37.7		80	106.1		
	B	387	107.5	40.7		72	59.5	110	
		645	179.2	37.0		81	80.2		
		774	215.0	32.9		78	88.9		
	C	360	100.0	35.2		70	49.3	90	
		600	166.7	32.0		79	66.2		
		720	200.0	28.5		76	73.4		
SLOWN300-420/4		433	120.3	50.0	1480	76	77.6	132	620
		722	200.5	46.3		85	107.1		
		866	240.6	41.2		82	118.6		
	A	401	111.3	42.8		74	63.0	110	
		668	185.4	39.6		83	86.7		
		801	222.5	35.2		80	96.1		
	B	374	103.8	37.2		72	52.5	90	
		623	172.9	34.4		81	72.1		
		747	207.5	30.7		78	79.9		
	C	347	96.3	32.0		70	43.1	75	
		578	160.4	29.6		79	59.0		
		693	192.5	26.4		76	65.5		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

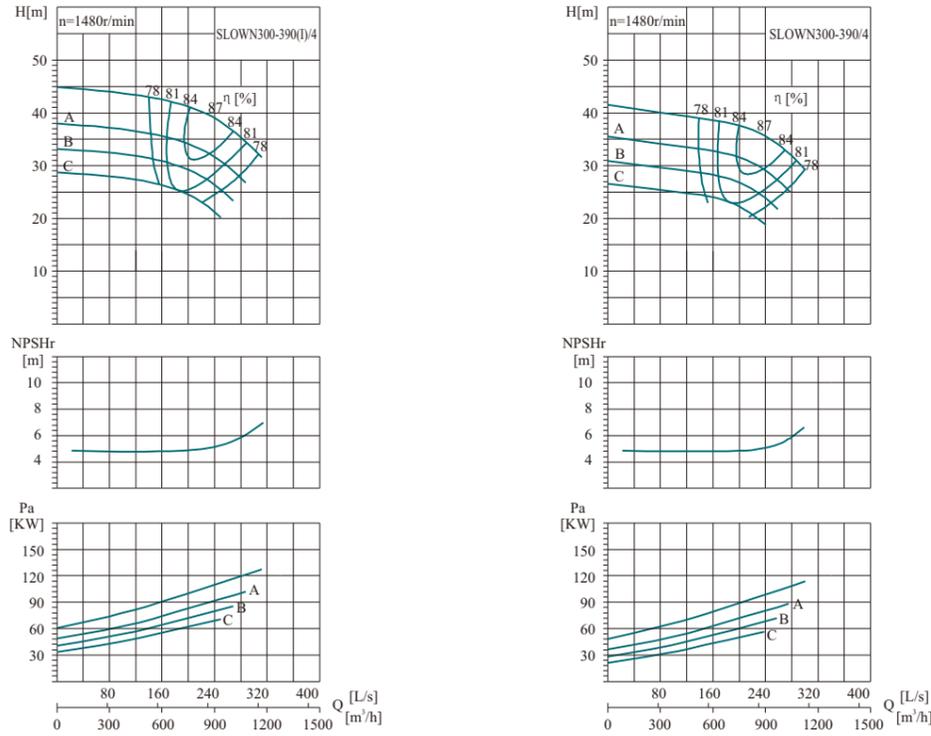


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN300-390(I)/4		540	150.0	42.9	5	78	80.9	132	600
		900	250.0	39.0		87	109.8		
		1071	297.5	34.7		84	120.5		
	A	497	138.0	36.3		76	64.6	110	
		828	230.0	33.0		85	87.5		
		994	276.0	29.4		82	96.9		
	B	464	129.0	31.7		74	54.2	90	
		774	215.0	28.8		83	73.2		
		929	258.0	25.7		80	81.1		
	C	432	120.0	27.5		72	44.8	75	
		720	200.0	25.0		81	60.4		
		864	240.0	22.2		78	67.0		
SLOWN300-390/4		520	144.4	39.0	5	78	70.8	132	600
		866	240.6	36.1		87	97.9		
		1040	288.8	32.2		84	108.3		
	A	481	133.5	33.4		76	57.4	110	
		801	222.5	30.9		85	79.2		
		961	267.0	27.5		82	87.7		
	B	448	124.5	29.0		74	47.8	90	
		747	207.5	26.9		83	65.8		
		896	249.0	23.9		80	72.9		
	C	416	115.5	25.0		76	37.2	75	
		693	192.5	23.1		81	53.9		
		832	231.0	20.6		78	59.7		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

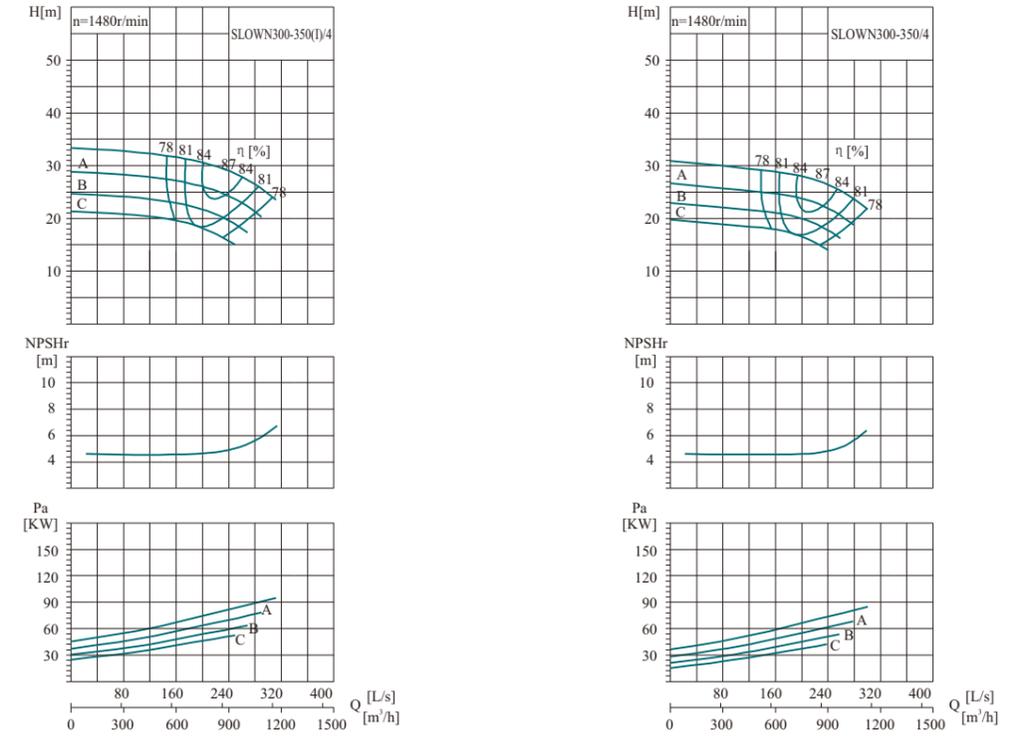


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN300-350(I)/4		540	150.0	31.9	5	78	60.1	110	550
		900	250.0	29.0		87	81.7		
		1080	300.0	25.8		84	90.3		
	A	502	139.5	27.6		76	49.6	90	
		837	232.5	25.1		85	67.2		
		1004	279.0	22.3		82	74.4		
	B	464	129.0	23.6		74	40.3	75	
		774	215.0	21.4		83	54.4		
		929	258.0	19.1		80	60.3		
	C	432	120.0	20.4		72	33.3	55	
		720	200.0	18.6		81	44.9		
		857	238.0	16.5		78	49.4		
SLOWN300-350/4		520	144.4	29.0	5	78	52.6	90	550
		866	240.6	26.9		87	72.8		
		1040	288.8	23.9		84	80.5		
	A	483	134.3	25.1		76	43.4	75	
		806	223.8	23.2		85	59.9		
		967	268.5	20.7		82	66.3		
	B	448	124.5	21.6		74	35.6	55	
		747	207.5	20.0		83	48.9		
		896	249.0	17.8		80	54.2		
	C	416	115.5	18.6		72	29.2	55	
		693	192.5	17.2		81	40.0		
		832	231.0	15.3		78	44.4		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

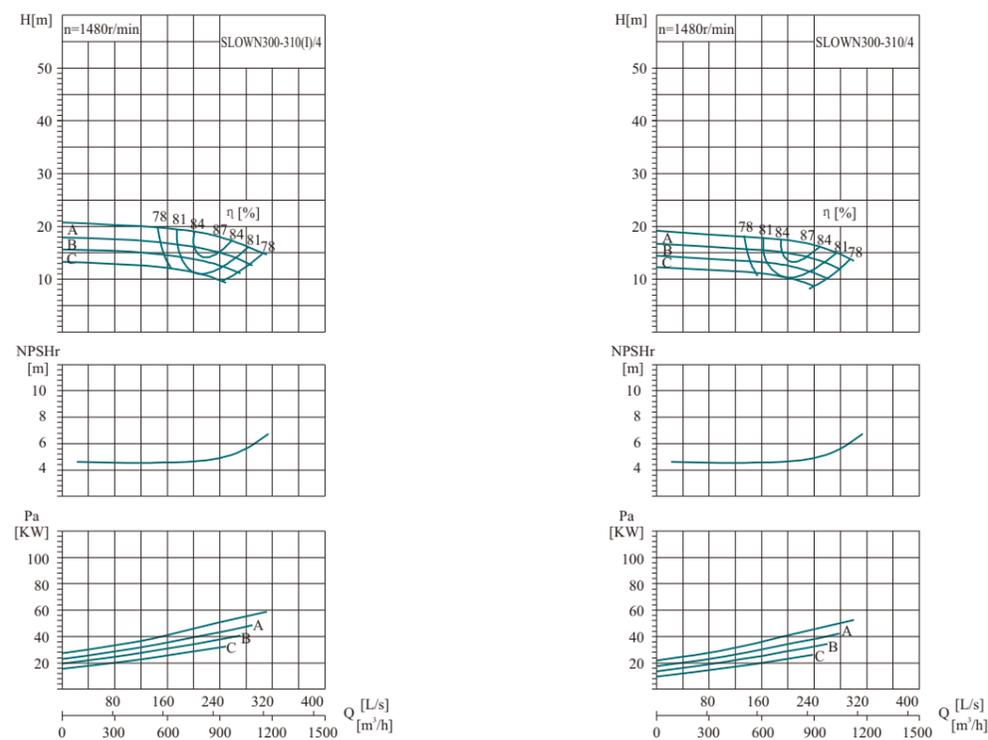


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN300-310(I)/4		540	150.0	19.8	5	1480	78	37.3	75	500
		900	250.0	18.0			87	50.7		
		1053	292.5	16.0			84	54.7		
	A	502	139.5	17.1			76	30.8	55	
		837	232.5	15.6			85	41.7		
		1004	279.0	13.9			82	46.2		
	B	470	130.5	15.0			74	25.9	45	
		783	217.5	13.6			83	35.0		
		940	261.0	12.1			80	38.8		
	C	432	120.0	12.7			72	20.7	37	
		720	200.0	11.5			81	27.9		
		864	240.0	10.3			78	30.9		
SLOWN300-310/4		520	144.4	18.0	5	1480	78	32.7	55	500
		866	240.6	16.7			87	45.2		
		1040	288.8	14.8			84	50.0		
	A	486	135.0	15.7			76	27.4	45	
		810	225.0	14.6			85	37.8		
		972	270.0	13.0			82	41.9		
	B	451	125.3	13.6			74	22.5	37	
		752	208.8	12.6			83	30.9		
		902	250.5	11.2			80	34.3		
	C	416	115.5	11.5			72	18.1	37	
		693	192.5	10.7			81	24.9		
		832	231.0	9.5			78	27.6		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

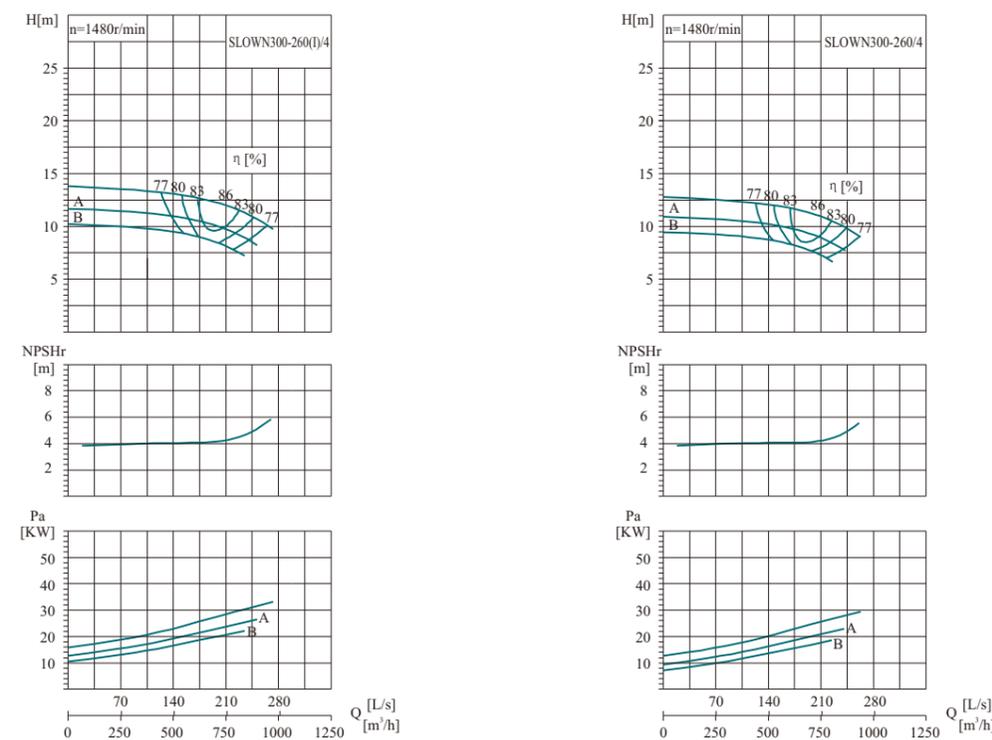


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)					
	(m³/h)	(L/s)												
SLOWN300-260(I)/4		450	125.0	13.2	4.6	1480	77	21.0	37	500				
		750	208.3	12.0			86	28.5						
		900	250.0	10.7			83	31.5						
	A	414	115.0	11.2			75	16.8	30					
		690	191.7	10.2			84	22.7						
		828	230.0	9.0			81	25.2						
	B	387	107.5	9.8			73	14.1	30					
		645	179.2	8.9			82	19.0						
		774	215.0	7.9			79	21.1						
	SLOWN300-260/4		433	120.3			12.2	4.6	1480		77	18.7	37	500
			722	200.5			11.1				86	25.4		
			866	240.6			9.9				83	28.1		
A		401	111.3	10.5	75	15.2	30							
		668	185.4	9.5	84	20.6								
		801	222.5	8.5	81	22.8								
B		372	103.5	9.0	73	12.6	22							
		621	172.4	8.2	82	16.9								
		745	206.9	7.3	79	18.8								

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

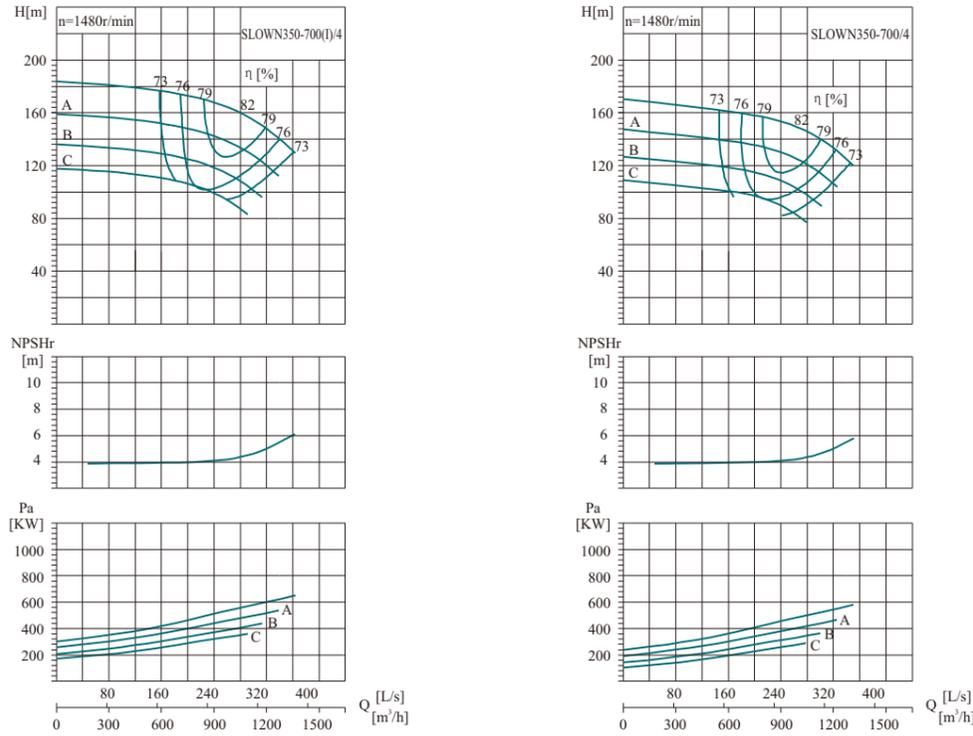

型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-700(I)4		630	175.0	176.0	1480	73	413.5	710	1300
		1050	291.7	160.0		82	557.7		
		1218	338.3	142.4		79	597.7		
	A	586	162.8	152.2	71	342.0	560		
		977	271.3	138.4	80	459.8			
		1172	325.5	123.2	77	510.2			
	B	542	150.5	130.2	69	278.2	450		
		903	250.8	118.3	78	372.9			
		1084	301.0	105.3	75	414.2			
	C	504	140.0	112.6	67	230.7	400		
		840	233.3	102.4	76	308.1			
		1008	280.0	91.1	73	342.6			
SLOWN350-700/4		606	168.4	160.1	1480	73	362.0	630	1300
		1011	280.7	148.2		82	497.3		
		1213	336.9	131.9		79	551.3		
	A	564	156.6	138.4	71	299.2	500		
		940	261.0	128.2	80	409.8			
		1128	313.3	114.1	77	454.8			
	B	523	145.3	119.0	69	245.6	400		
		872	242.1	110.2	78	335.3			
		1046	290.5	98.1	75	372.4			
	C	485	134.8	102.5	67	201.9	355		
		809	224.6	94.9	76	274.7			
		970	269.5	84.4	73	305.5			



## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

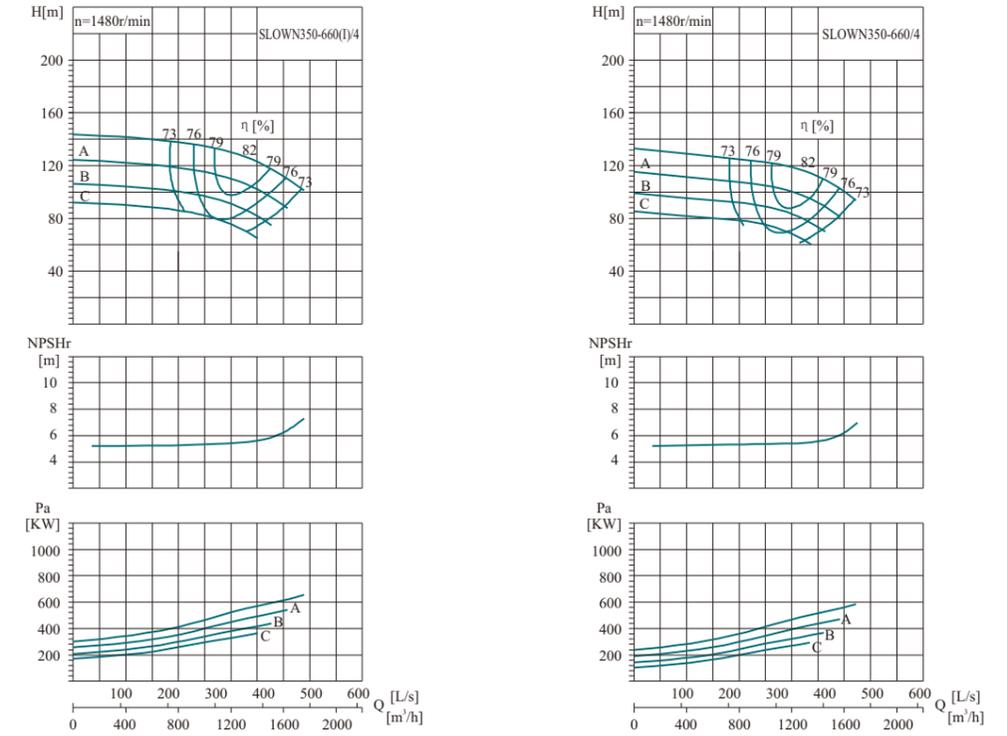

型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-660(I)4		810	225.0	137.5	1480	73	415.3	710	1400
		1350	375.0	125.0		82	560.2		
		1566	435.0	111.3		79	600.3		
	A	753	209.3	118.9	71	343.5	560		
		1256	348.8	108.1	80	461.9			
		1507	418.5	96.2	77	512.5			
	B	697	193.5	101.7	69	279.5	500		
		1161	322.5	92.5	78	374.6			
		1393	387.0	82.3	75	416.1			
	C	648	180.0	88.0	67	231.7	400		
		1080	300.0	80.0	76	309.5			
		1296	360.0	71.2	73	344.1			
SLOWN350-660/4		780	216.6	125.1	1480	73	363.6	630	1400
		1299	360.9	115.8		82	499.5		
		1559	433.1	103.1		79	553.7		
	A	725	201.4	108.1	71	300.6	500		
		1208	335.6	100.1	80	411.7			
		1450	402.8	89.1	77	456.8			
	B	672	186.8	93.0	69	246.7	400		
		1121	311.3	86.1	78	336.7			
		1345	373.5	76.6	75	374.0			
	C	624	173.3	80.0	67	202.8	355		
		1040	288.8	74.1	76	275.9			
		1247	346.5	66.0	73	306.8			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

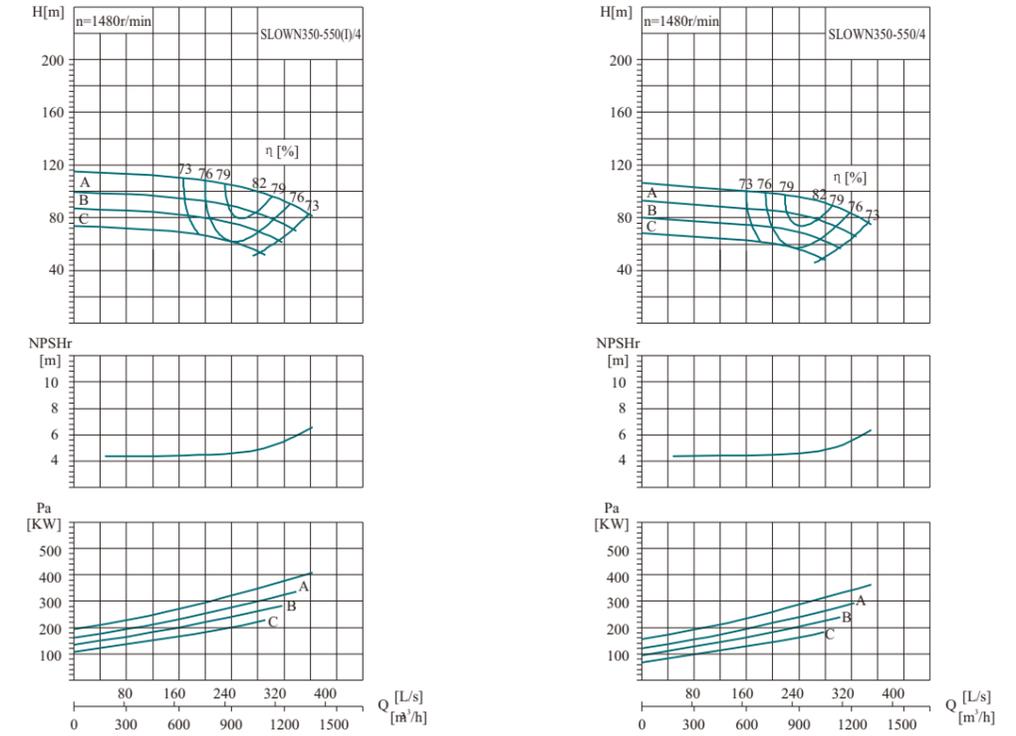
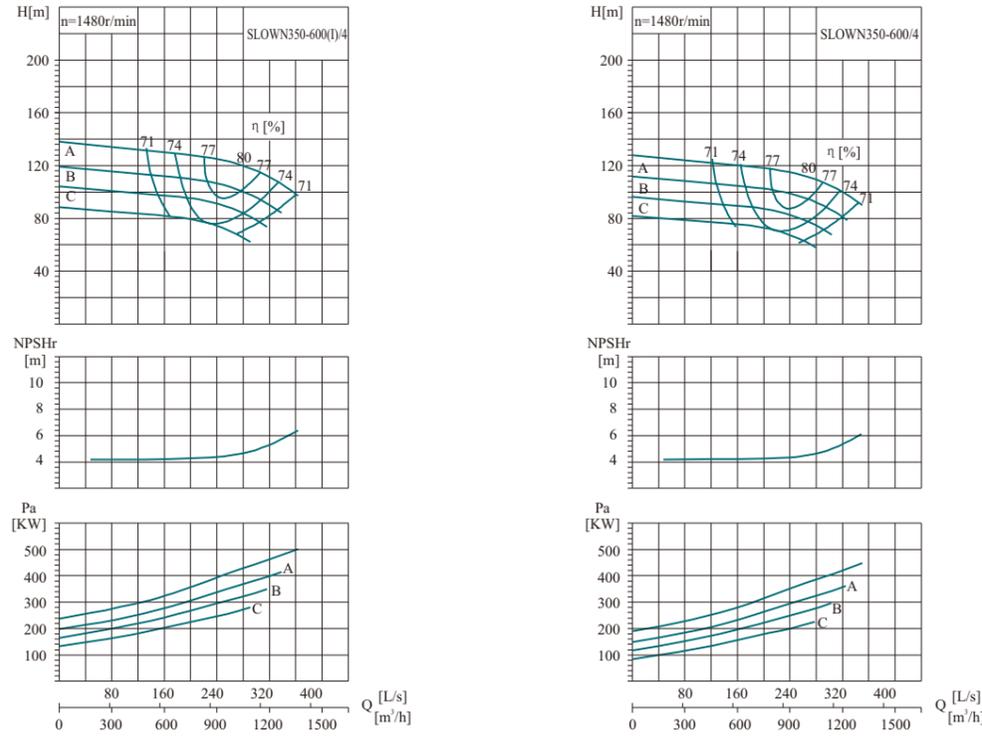


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-600(I)4		630	175.0	129.6	1480	71	313.0	500	1350
		1050	291.7	120.0		80	428.8		
		1260	350.0	106.8		77	475.7		
	A	586	162.8	112.1		69	259.1	450	
		977	271.3	103.8		78	353.7		
		1172	325.5	92.4		75	392.9		
	B	548	152.3	98.1		67	218.5	355	
		914	253.8	90.8		76	297.2		
		1096	304.5	80.8		73	330.4		
	C	504	140.0	82.9		65	175.1	280	
		840	233.3	76.8		74	237.3		
		1008	280.0	68.4		71	264.2		
SLOWN350-600/4		606	168.4	120.1	1480	71	279.1	450	1350
		1011	280.7	111.2		80	382.3		
		1213	336.9	98.9		77	424.2		
	A	567	157.5	105.0		69	234.8	400	
		945	262.5	97.2		78	320.6		
		1134	315.0	86.5		75	356.1		
	B	526	146.1	90.4		67	193.1	315	
		877	243.5	83.7		76	262.7		
		1052	292.3	74.5		73	292.1		
	C	485	134.8	76.8		65	156.1	280	
		809	224.6	71.1		74	211.6		
		970	269.5	63.3		71	235.5		

型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-550(I)4		630	175.0	110.0	1480	73	258.4	400	990
		1050	291.7	100.0		82	348.6		
		1260	350.0	89.0		79	386.4		
	A	586	162.8	95.1		71	213.7	355	
		977	271.3	86.5		80	287.4		
		1172	325.5	77.0		77	318.9		
	B	548	152.3	83.3		69	180.0	280	
		914	253.8	75.7		78	241.3		
		1096	304.5	67.4		75	268.0		
	C	504	140.0	70.4		67	144.2	250	
		840	233.3	64.0		76	192.6		
		1008	280.0	57.0		73	214.1		
SLOWN350-550/4		606	168.4	100.1	1480	73	226.2	355	990
		1011	280.7	92.6		82	310.8		
		1213	336.9	82.5		79	344.6		
	A	567	157.5	87.5		71	190.2	315	
		945	262.5	81.0		80	260.5		
		1134	315.0	72.1		77	289.0		
	B	526	146.1	75.3		69	156.3	250	
		877	243.5	69.7		78	213.3		
		1052	292.3	62.1		75	237.0		
	C	485	134.8	64.0		67	126.2	220	
		809	224.6	59.3		76	171.7		
		970	269.5	52.8		73	190.9		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table


## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

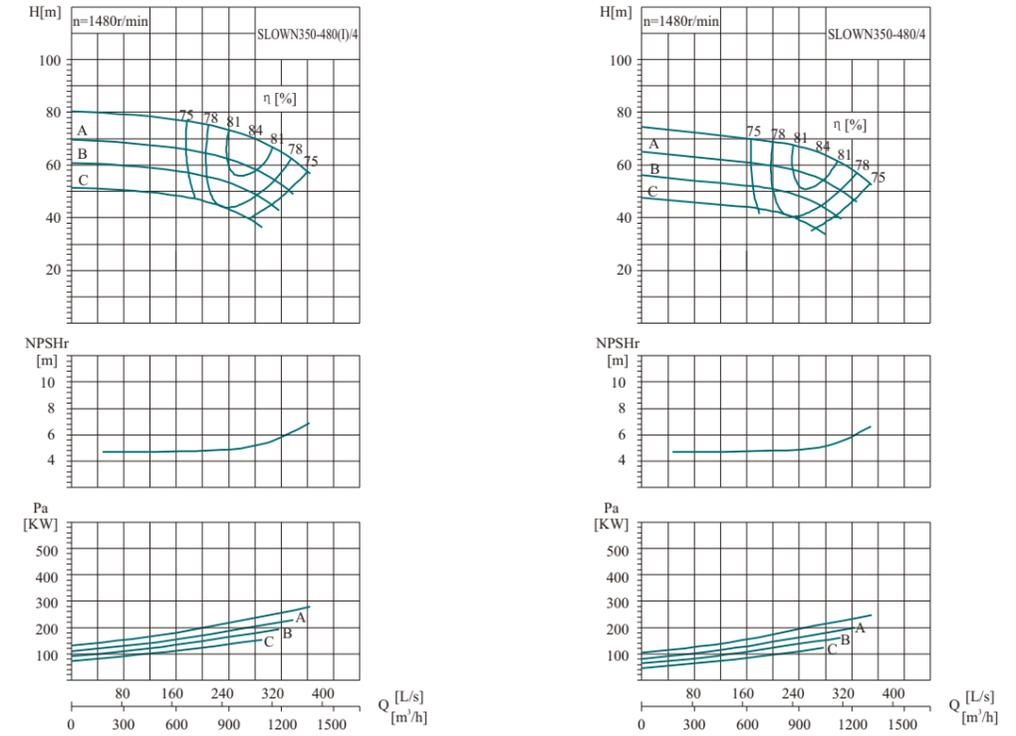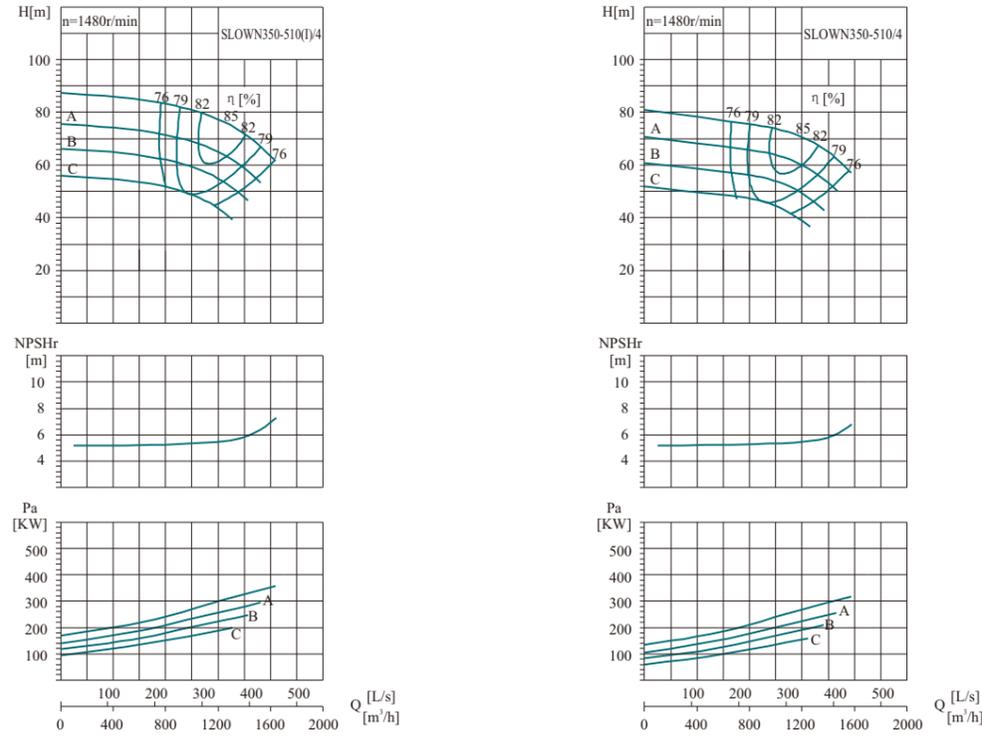

型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-510(I)/4		756	210.0	83.6	1480	76	226.4	355	1150
		1260	350.0	76.0		85	306.7		
		1512	420.0	67.6		82	339.5		
	A	703	195.3	72.3		74	187.0	315	
		1172	325.5	65.7		83	252.6		
		1406	390.6	58.5		80	279.9		
	B	658	182.7	63.3		72	157.4	250	
		1096	304.5	57.5		81	211.9		
		1315	365.4	51.2		78	235.0		
	C	605	168.0	53.5		70	125.8	200	
		1008	280.0	48.6		79	168.9		
		1210	336.0	43.3		76	187.6		
SLOWN350-510/4		728	202.1	76.0	1480	76	198.2	315	1150
		1213	336.9	70.4		85	273.5		
		1455	404.3	62.7		82	302.7		
	A	680	189.0	66.5		74	166.4	280	
		1134	315.0	61.6		83	229.0		
		1361	378.0	54.8		80	253.7		
	B	631	175.4	57.2		72	136.6	220	
		1052	292.3	53.0		81	187.4		
		1263	350.7	47.2		78	207.8		
	C	582	161.7	48.7		70	110.2	185	
		970	269.5	45.1		79	150.6		
		1164	323.4	40.1		76	167.2		


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-480(I)/4		630	175.0	77.0	1480	75	176.1	280	900
		1050	291.7	70.0		84	238.2		
		1260	350.0	62.3		81	263.8		
	A	586	162.8	66.6		73	145.5	250	
		977	271.3	60.5		82	196.3		
		1172	325.5	53.9		79	217.6		
	B	548	152.3	58.3		71	122.5	200	
		914	253.8	53.0		80	164.7		
		1096	304.5	47.2		77	182.7		
	C	504	140.0	49.3		69	98.0	160	
		840	233.3	44.8		78	131.3		
		1008	280.0	39.9		75	145.9		
SLOWN350-480/4		606	168.4	70.0	1480	75	154.1	250	900
		1011	280.7	64.8		84	212.4		
		1213	336.9	57.7		81	235.2		
	A	567	157.5	61.2		73	129.5	220	
		945	262.5	56.7		82	177.9		
		1134	315.0	50.5		79	197.2		
	B	526	146.1	52.7		71	106.3	185	
		877	243.5	48.8		80	145.6		
		1052	292.3	43.4		77	161.6		
	C	485	134.8	44.8		69	85.8	132	
		809	224.6	41.5		78	117.1		
		970	269.5	36.9		75	130.1		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

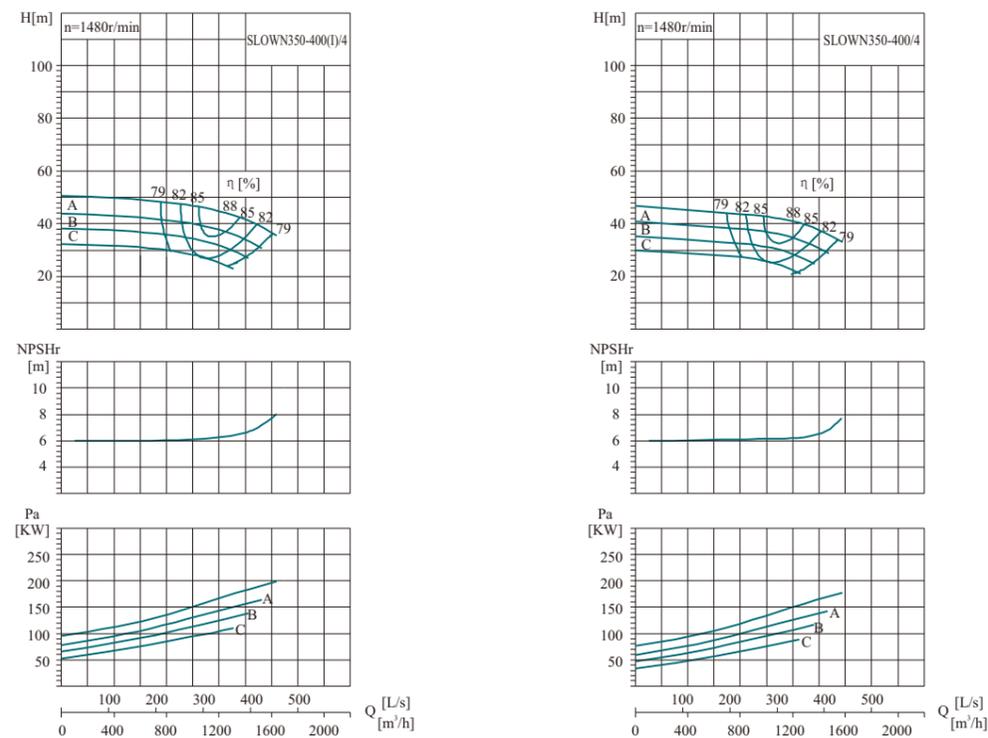


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-400(I)/4		756	210.0	48.4	1480	79	126.1	220	950
		1260	350.0	44.0		88	171.5		
		1512	420.0	39.2		85	189.6		
	A	703	195.3	41.9		77	104.1	185	
		1172	325.5	38.1		86	141.2		
		1406	390.6	33.9		83	156.2		
	B	658	182.7	36.6		75	87.5	160	
		1096	304.5	33.3		84	118.3		
		1315	365.4	29.6		81	131.0		
	C	605	168.0	31.0		73	69.9	132	
		1008	280.0	28.2		82	94.2		
		1210	336.0	25.1		79	104.5		
SLOWN350-400/4		728	202.1	44.0	1480	79	110.4	185	950
		1213	336.9	40.8		88	152.9		
		1455	404.3	36.3		85	169.1		
	A	680	189.0	38.5		77	92.6	160	
		1134	315.0	35.6		86	127.9		
		1361	378.0	31.7		83	141.6		
	B	631	175.4	33.1		75	75.9	132	
		1052	292.3	30.7		84	104.6		
		1263	350.7	27.3		81	115.8		
	C	582	161.7	28.2		73	61.2	110	
		970	269.5	26.1		82	84.0		
		1164	323.4	23.2		79	93.1		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

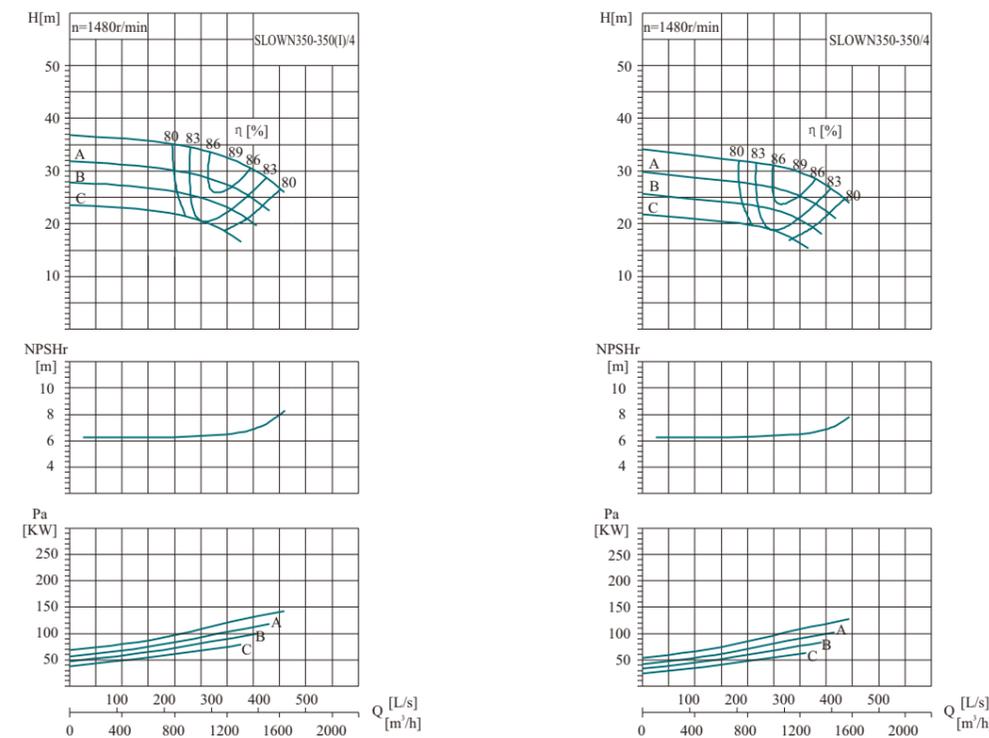


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN350-350(I)/4		756	210.0	35.2	1480	80	90.6	160	700
		1260	350.0	32.0		89	123.3		
		1512	420.0	28.5		86	136.3		
	A	703	195.3	30.4		78	74.7	132	
		1172	325.5	27.7		87	101.5		
		1406	390.6	24.6		84	112.2		
	B	658	182.7	26.6		76	62.8	110	
		1096	304.5	24.2		85	85.0		
		1315	365.4	21.6		82	94.1		
	C	605	168.0	22.5		74	50.1	90	
		1008	280.0	20.5		83	67.7		
		1210	336.0	18.2		80	75.0		
SLOWN350-350/4		728	202.1	32.0	1480	80	79.3	132	700
		1213	336.9	29.6		89	110.0		
		1455	404.3	26.4		86	121.5		
	A	680	189.0	28.0		78	66.5	110	
		1134	315.0	25.9		87	92.0		
		1361	378.0	23.1		84	101.7		
	B	631	175.4	24.1		76	54.5	90	
		1052	292.3	22.3		85	75.2		
		1263	350.7	19.9		82	83.2		
	C	582	161.7	20.5		74	43.9	75	
		970	269.5	19.0		83	60.4		
		1164	323.4	16.9		80	66.9		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

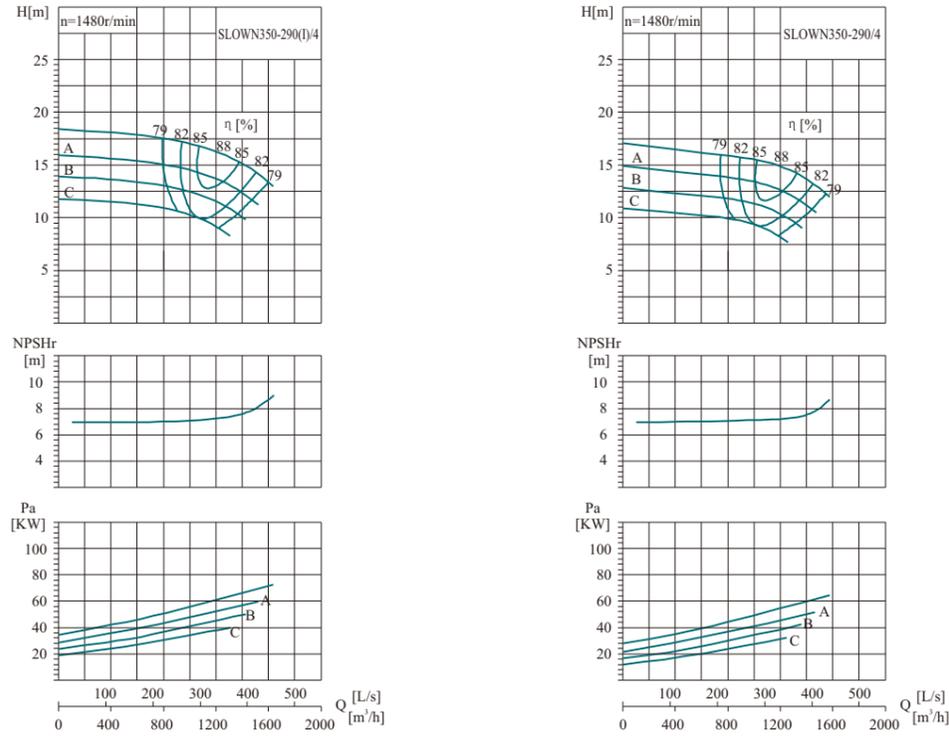


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN350-290(I)/4		756	210.0	17.6	1480	79	45.8	75	700	
		1260	350.0			88	62.4			
		1512	420.0			85	69.0			
	A	703	195.3	15.2	77	37.8	75	700		
		1172	325.5	13.8	86	51.3				
		1406	390.6	12.3	83	56.8				
		658	182.7	13.3	75	31.8	55			
		1096	304.5	12.1	84	43.0				
		1315	365.4	10.8	81	47.6				
	C	605	168.0	11.3	73	25.4	45			
		1008	280.0	10.2	82	34.3				
		1210	336.0	9.1	79	38.0				
SLOWN350-290/4		728	202.1	16.0	1480	79	40.1	75	700	
		1213	336.9			14.8	88			55.6
		1455	404.3			13.2	85			61.5
	A	680	189.0	14.0	77	33.7	55			
		1134	315.0	13.0	86	46.5				
		1361	378.0	11.5	83	51.5				
	B	631	175.4	12.0	75	27.6	45			
		1052	292.3	11.2	84	38.0				
		1263	350.7	9.9	81	42.1				
	C	582	161.7	10.2	73	22.2	37			
		970	269.5	9.5	82	30.6				
		1164	323.4	8.4	79	33.9				

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

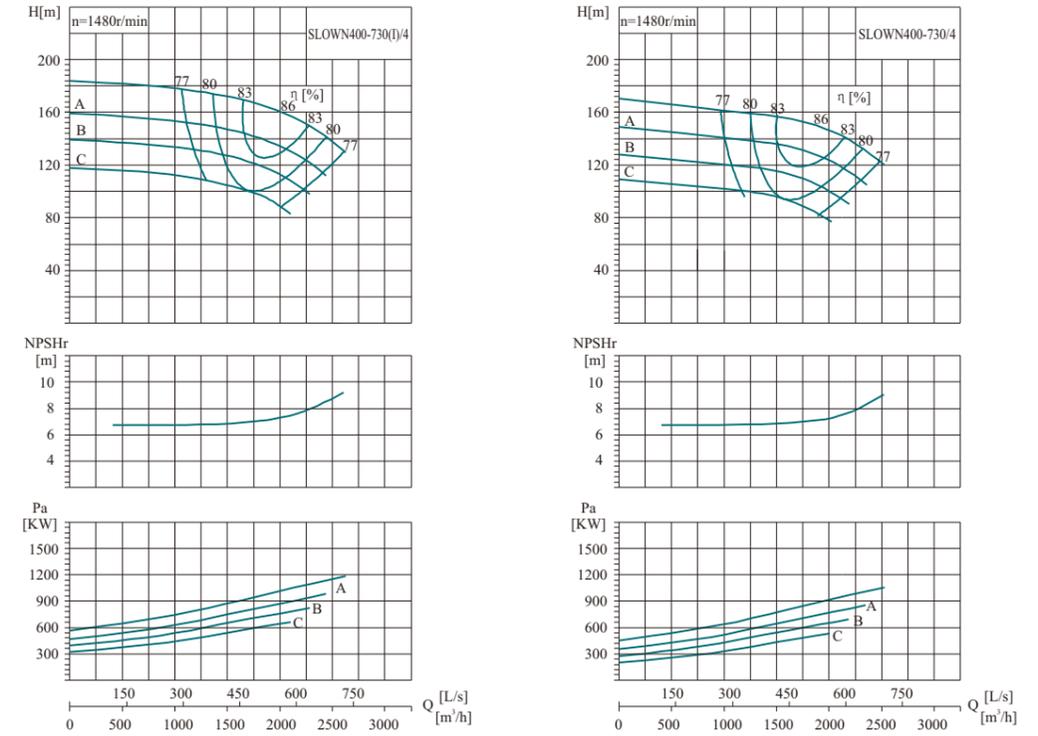


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN400-730(I)/4		1212	336.7	176.0	1480	77	754.1	1250	1900	
		2020	561.1			86	1023.0			
		2424	673.3			83	1132.1			
	A	1127	313.1	152.2	75	622.8	1000			
		1879	521.8	138.4	84	842.5				
		2254	626.2	123.2	81	933.1				
		1054	292.9	133.2	73	523.8	900			
		1757	488.2	121.1	82	706.5				
		2109	585.8	107.8	79	783.2				
	C	970	269.3	112.6	71	418.7	710			
		1616	448.9	102.4	80	563.1				
		1939	538.7	94.2	77	645.9				
SLOWN400-730/4		1167	324.0	160.1	1480	77	660.2	1120	1900	
		1944	540.1			148.2	86			912.2
		2333	648.1			131.9	83			1009.5
	A	1091	303.0	140.0	75	554.2	900			
		1818	505.0	129.6	84	763.6				
		2182	606.0	115.3	81	845.7				
	B	1012	281.1	120.5	73	454.7	710			
		1687	468.5	111.6	82	624.7				
		2024	562.2	99.3	79	692.5				
	C	933	259.2	102.5	71	366.6	630			
		1555	432.1	94.9	80	502.1				
		1866	518.5	84.4	77	557.1				

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

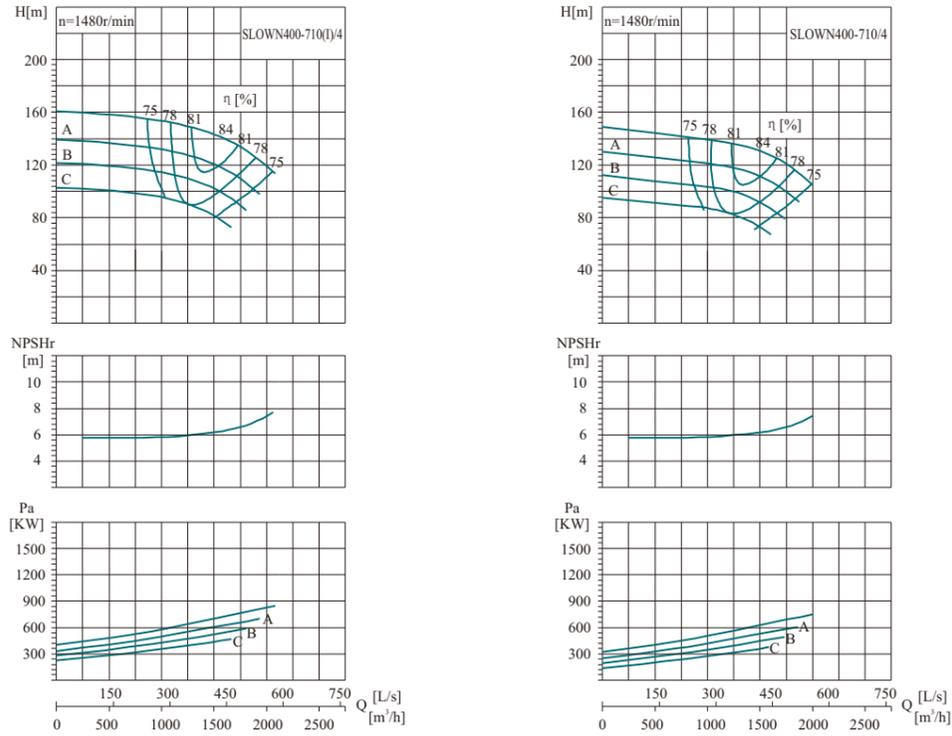


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN400-710(I)/4		960	266.7	154.0	6.3	1480	75	536.6	900	1800
		1600	444.4	140.0			84	725.9		
		1920	533.3	124.6			81	804.0		
	A	893	248.0	133.2			73	443.4	710	
		1488	413.3	121.1			82	598.1		
		1786	496.0	107.8			79	663.1		
	B	835	232.0	116.6			71	373.3	630	
		1392	386.7	106.0			80	501.9		
		1670	464.0	94.3			77	556.9		
	C	768	213.3	98.6			69	298.6	500	
		1280	355.6	89.6			78	400.3		
		1536	426.7	79.7			75	444.6		
SLOWN400-710/4		924	256.7	140.1	6.3	1480	75	469.8	800	1800
		1540	427.8	129.7			84	647.3		
		1848	513.3	115.4			81	716.9		
	A	864	240.0	122.5			73	394.6	630	
		1440	400.0	113.4			82	542.1		
		1728	480.0	100.9			79	601.0		
	B	802	222.7	105.4			71	324.0	500	
		1336	371.1	97.6			80	443.8		
		1603	445.3	86.9			77	492.4		
	C	739	205.3	89.6			69	261.4	450	
		1232	342.2	83.0			78	356.9		
		1478	410.7	73.9			75	396.4		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

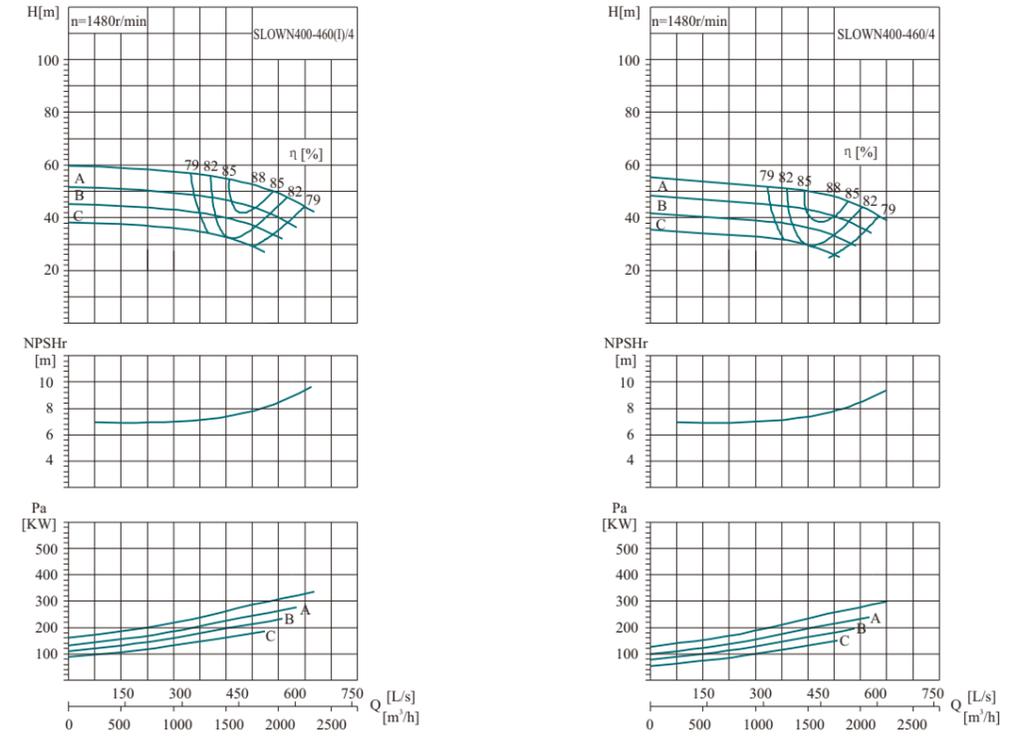


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN400-460(I)/4		1080	300.0	57.2	8	1480	79	212.9	355	1460
		1800	500.0	52.0			88	289.5		
		2160	600.0	46.3			85	320.1		
	A	1004	279.0	49.5			77	175.7	280	
		1674	465.0	45.0			86	238.3		
		2009	558.0	40.0			83	263.7		
	B	940	261.0	43.3			75	147.7	250	
		1566	435.0	39.4			84	199.7		
		1879	522.0	35.0			81	221.2		
	C	864	240.0	36.6			73	117.9	200	
		1440	400.0	33.3			82	159.1		
		1728	480.0	29.6			79	176.4		
SLOWN400-460/4		1040	288.8	52.0	8	1480	79	186.4	315	1460
		1733	481.3	48.2			88	258.2		
		2079	577.5	42.9			85	285.5		
	A	972	270.0	45.5			77	156.3	250	
		1620	450.0	42.1			86	216.0		
		1944	540.0	37.5			83	239.0		
	B	902	250.5	39.2			75	128.2	200	
		1503	417.5	36.3			84	176.6		
		1804	501.0	32.3			81	195.6		
	C	832	231.0	33.3			73	103.3	160	
		1386	385.0	30.8			82	141.9		
		1663	462.0	27.4			79	157.3		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

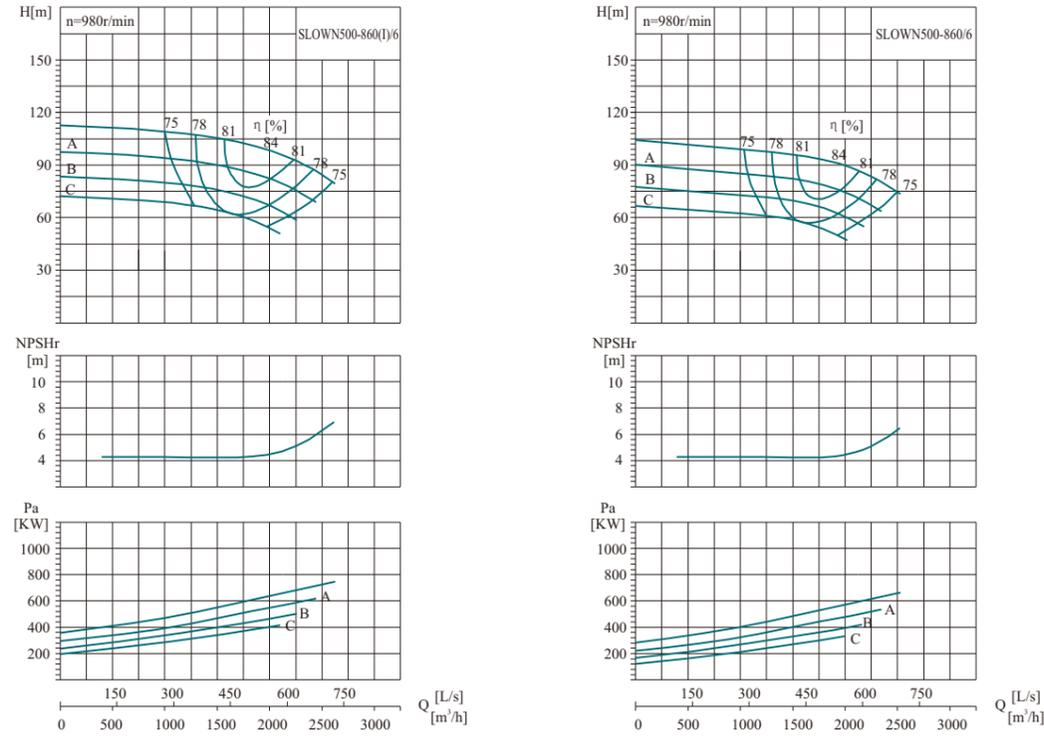


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN500-860(I)/6	A	1212	336.7	107.8	980	75	474.2	800	2600
		2020	561.1	98.0		84	641.5		
		2424	673.3	87.2		81	710.5		
		1127	313.1	93.2		73	391.9		
		1879	521.8	84.8		82	528.6		
		2254	626.2	75.4		79	586.0		
	B	1042	289.5	79.7		71	318.6	500	
		1737	482.6	72.5		80	428.5		
		2085	579.1	64.5		77	475.4		
	C	970	269.3	69.0		69	263.9	450	
		1616	448.9	62.7		78	353.7		
		1939	538.7	55.8		75	392.9		
SLOWN500-860/6	A	1167	324.0	98.1	980	75	415.2	630	2600
		1944	540.1	90.8		84	572.0		
		2333	648.1	80.8		81	633.6		
		1085	301.3	84.8		73	342.9		
		1808	502.2	78.5		82	471.1		
		2169	602.6	69.9		79	522.3		
	B	1006	279.4	72.9		71	281.2	450	
		1677	465.7	67.5		80	385.2		
		2012	558.9	60.1		77	427.4		
	C	933	259.2	62.8		69	231.0	400	
		1555	432.1	58.1		78	315.4		
		1866	518.5	51.7		75	350.3		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

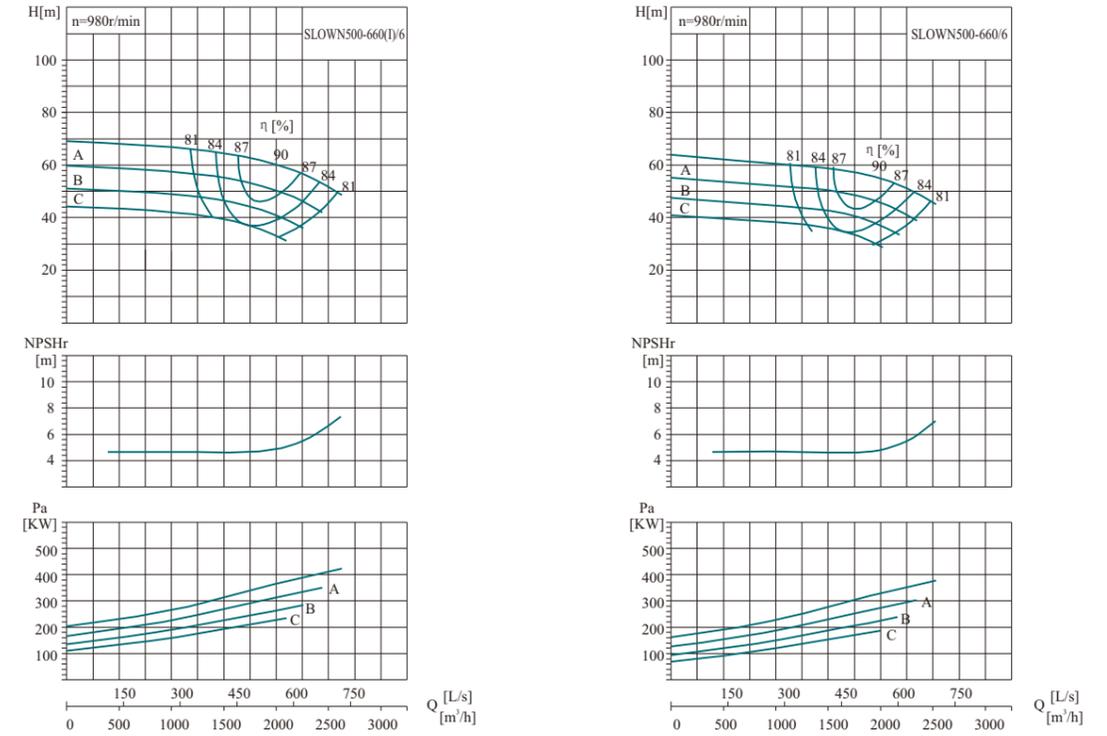


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN500-660(I)/6	A	1212	336.7	66.0	980	81	268.8	450	2400
		2020	561.1	60.0		90	366.6		
		2424	673.3	53.4		87	405.0		
		1127	313.1	57.1		79	221.7		
		1879	521.8	51.9		88	301.6		
		2254	626.2	46.2		85	333.4		
	B	1042	289.5	48.8		77	179.9	315	
		1737	482.6	44.4		86	244.0		
		2085	579.1	39.5		83	270.0		
	C	970	269.3	42.2		75	148.7	250	
		1616	448.9	38.4		84	201.1		
		1939	538.7	34.2		81	222.7		
SLOWN500-660/6	A	1167	324.0	60.0	980	81	235.4	400	2400
		1944	540.1	55.6		90	326.9		
		2333	648.1	49.5		87	361.1		
		1085	301.3	51.9		79	194.0		
		1808	502.2	48.1		88	268.8		
		2169	602.6	42.8		85	297.2		
	B	1006	279.4	44.6		77	158.8	280	
		1677	465.7	41.3		86	219.4		
		2012	558.9	36.8		83	242.7		
	C	933	259.2	38.4		75	130.1	220	
		1555	432.1	35.6		84	179.3		
		1866	518.5	31.7		81	198.6		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

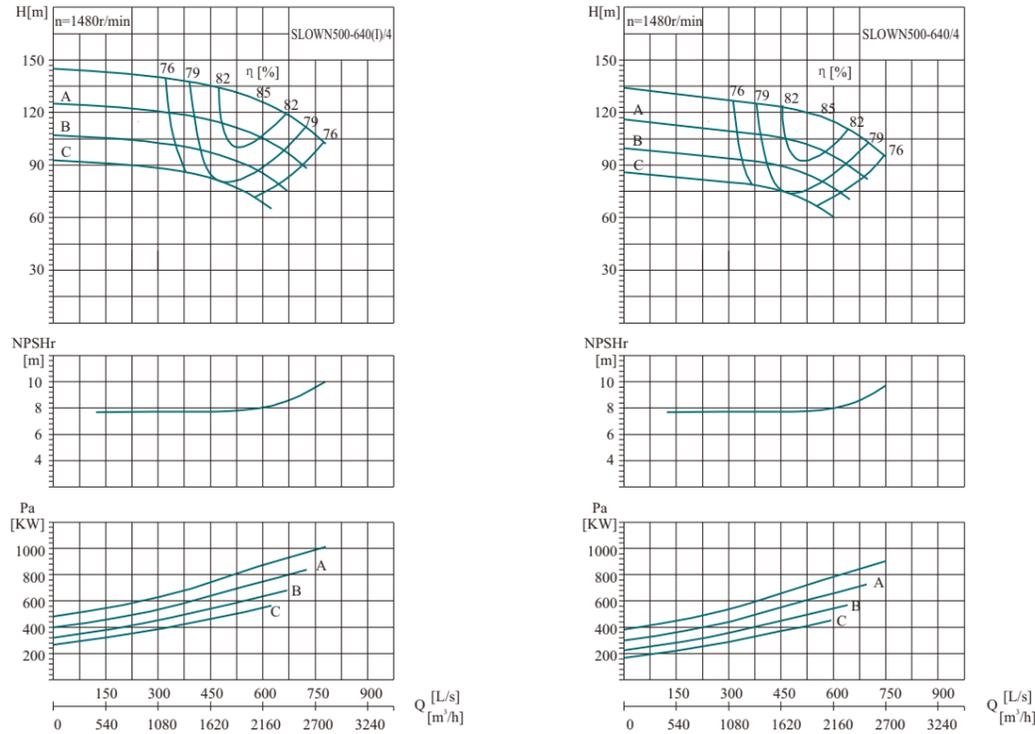


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN500-640(I)/4		1296	360.0	138.6	8	76	643.4	1000	2570
		2160	600.0	126.0		85	871.6		
		2592	720.0	112.1		82	965.0		
	A	1205	334.8	119.9		74	531.5	900	
		2009	558.0	109.0		83	718.0		
		2411	669.6	97.0		80	795.6		
	B	1115	309.6	102.5		72	432.0	710	
		1858	516.0	93.2		81	581.8		
		2229	619.2	82.9		78	645.2		
	C	1037	288.0	88.7		70	357.7	630	
		1728	480.0	80.6		79	480.2		
		2074	576.0	71.8		76	533.1		
SLOWN500-640/4		1247	346.5	126.1	8	76	563.3	900	2570
		2079	577.5	116.7		85	777.2		
		2495	693.0	103.9		82	860.4		
	A	1160	322.2	109.0		74	465.1	710	
		1933	537.0	100.9		83	639.9		
		2320	644.4	89.8		80	709.1		
	B	1076	298.8	93.7		72	381.3	630	
		1793	498.0	86.8		81	523.0		
		2151	597.6	77.3		78	580.0		
	C	998	277.2	80.7		70	313.1	500	
		1663	462.0	74.7		79	428.1		
		1996	554.4	66.5		76	475.3		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

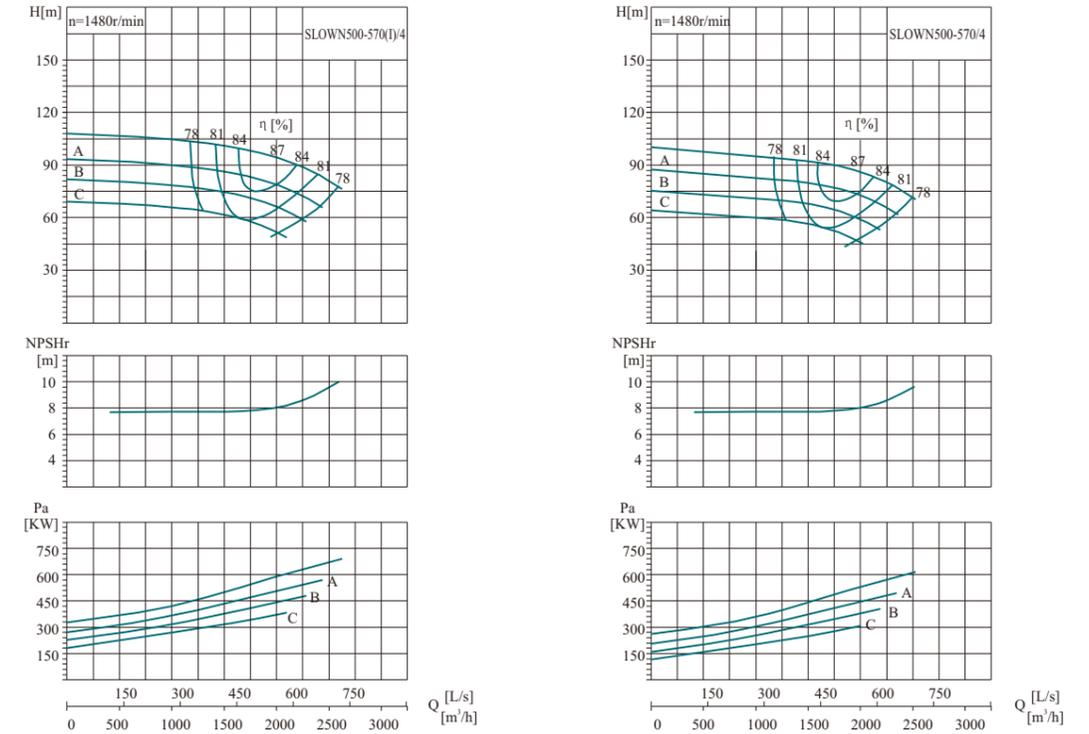


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN500-570(I)/4		1212	336.7	103.4	8	78	437.4	710	1700
		2020	561.1	94.0		87	594.1		
		2424	673.3	83.7		84	657.2		
	A	1127	313.1	89.4		76	361.1	560	
		1879	521.8	81.3		85	489.1		
		2254	626.2	72.4		82	541.5		
	B	1054	292.9	78.3		74	303.6	500	
		1757	488.2	71.1		83	410.1		
		2109	585.8	63.3		80	454.4		
	C	970	269.3	66.2		72	242.6	400	
		1616	448.9	60.2		81	326.7		
		1939	538.7	53.5		78	362.4		
SLOWN500-570/4		1167	324.0	94.0	8	78	382.9	630	1700
		1944	540.1	87.1		87	529.8		
		2333	648.1	77.5		84	586.0		
	A	1091	303.0	82.2		76	321.3	500	
		1818	505.0	76.1		85	443.3		
		2182	606.0	67.8		82	490.8		
	B	1012	281.1	70.8		74	263.5	450	
		1687	468.5	65.5		83	362.6		
		2024	562.2	58.3		80	401.7		
	C	933	259.2	60.2		72	212.4	355	
		1555	432.1	55.7		81	291.3		
		1866	518.5	49.6		78	323.1		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

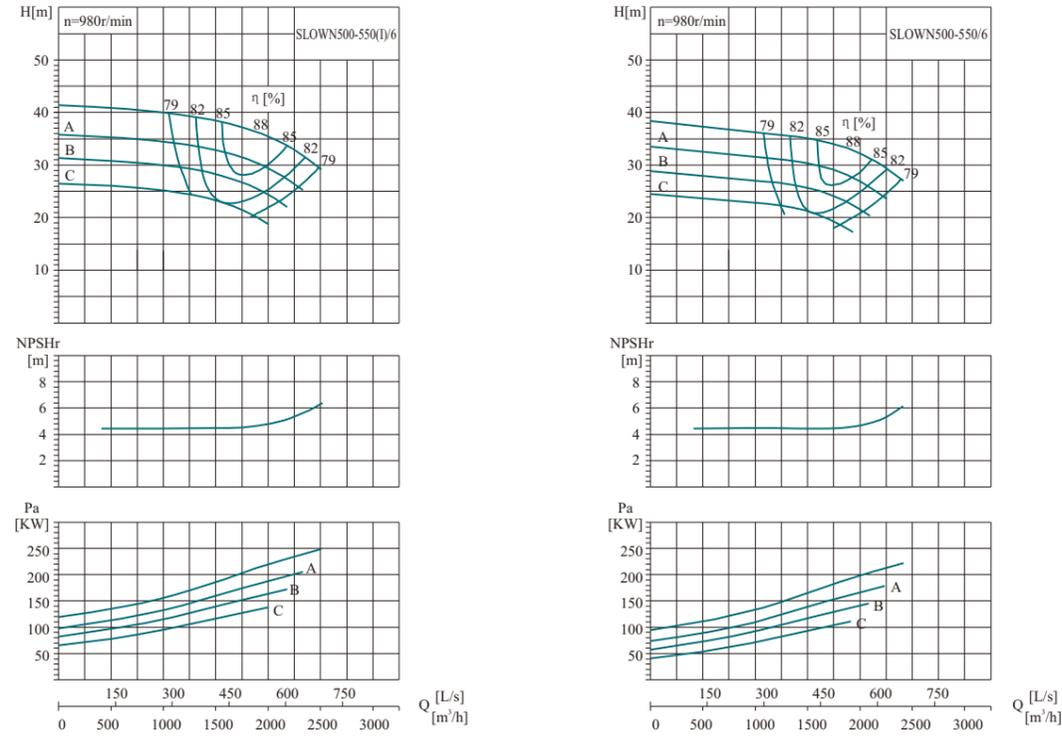


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN500-550(I)/6		1158	321.7	4.7	980	79	158.0	280	1800
		1930	536.1			88	214.9		
		2316	643.3			85	237.6		
	A	1077	299.2	34.3	77	130.4	220		
		1795	498.6	31.1	86	176.9			
		2154	598.3	27.7	83	195.8			
	B	1007	279.9	30.0	75	109.6	200		
		1679	466.4	27.2	84	148.3			
		2015	559.7	24.3	81	164.2			
	C	926	257.3	25.3	73	87.6	160		
		1544	428.9	23.0	82	118.1			
		1853	514.7	20.5	79	130.9			
SLOWN500-550/6		1115	309.6	4.7	980	79	138.3	250	1800
		1858	516.0			88	191.6		
		2229	619.2			85	211.9		
	A	1042	289.5	31.5	77	116.0	200		
		1737	482.5	29.2	86	160.3			
		2084	579.0	26.0	83	177.4			
	B	967	268.6	27.1	75	95.1	160		
		1612	447.7	25.1	84	131.1			
		1934	537.2	22.3	81	145.2			
	C	892	247.7	23.1	73	76.6	132		
		1486	412.8	21.3	82	105.3			
		1783	495.4	19.0	79	116.7			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

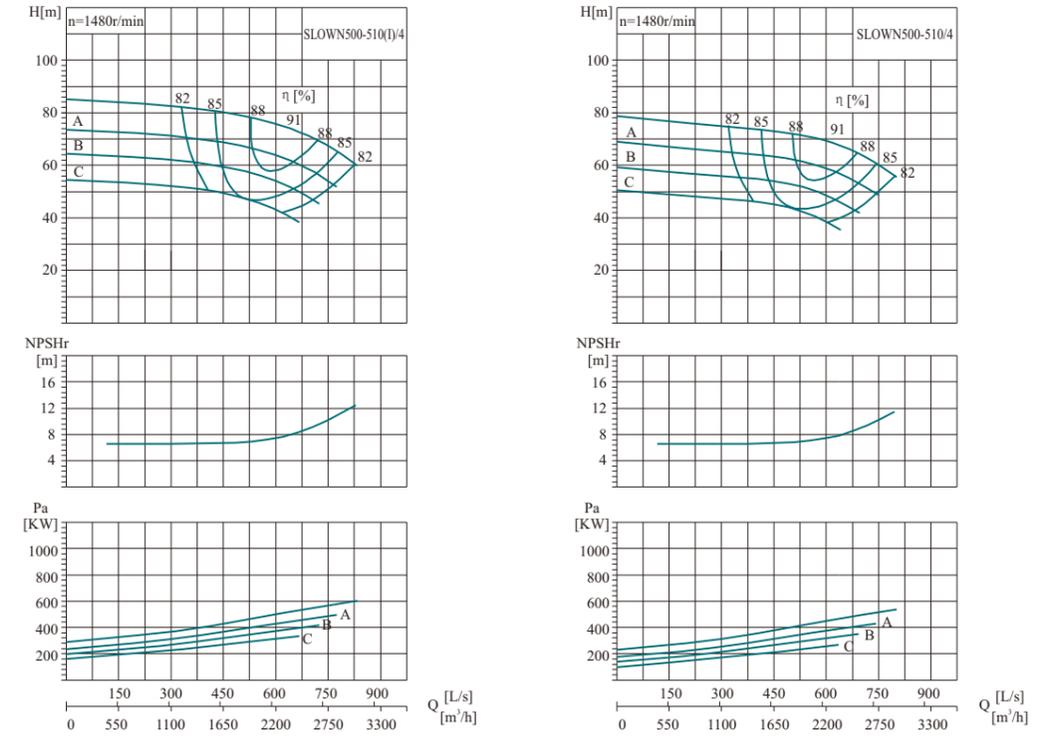


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN500-510(I)/4		1410	391.7	8	1480	82	381.0	630	1750
		2350	652.8			91	520.2		
		2820	783.3			88	574.5		
	A	1311	364.3	70.4	80	314.1	500		
		2186	607.1	64.0	89	427.8			
		2623	728.5	57.0	86	472.9			
	B	1227	340.8	61.6	78	263.8	450		
		2045	567.9	56.0	87	358.3			
		2453	681.5	49.8	84	396.3			
	C	1128	313.3	52.1	76	210.5	355		
		1880	522.2	47.4	85	285.2			
		2256	626.7	42.2	82	315.7			
SLOWN500-510/4		1357	377.0	8	1480	82	333.6	560	1750
		2262	628.3			91	463.9		
		2714	754.0			88	512.3		
	A	1269	352.5	64.7	80	279.5	450		
		2115	587.5	59.9	89	387.8			
		2538	705.0	53.3	86	428.6			
	B	1177	327.0	55.7	78	229.0	355		
		1962	545.1	51.6	87	316.8			
		2355	654.1	45.9	84	350.4			
	C	1086	301.6	47.4	76	184.3	315		
		1810	502.6	43.9	85	254.3			
		2171	603.2	39.0	82	281.5			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

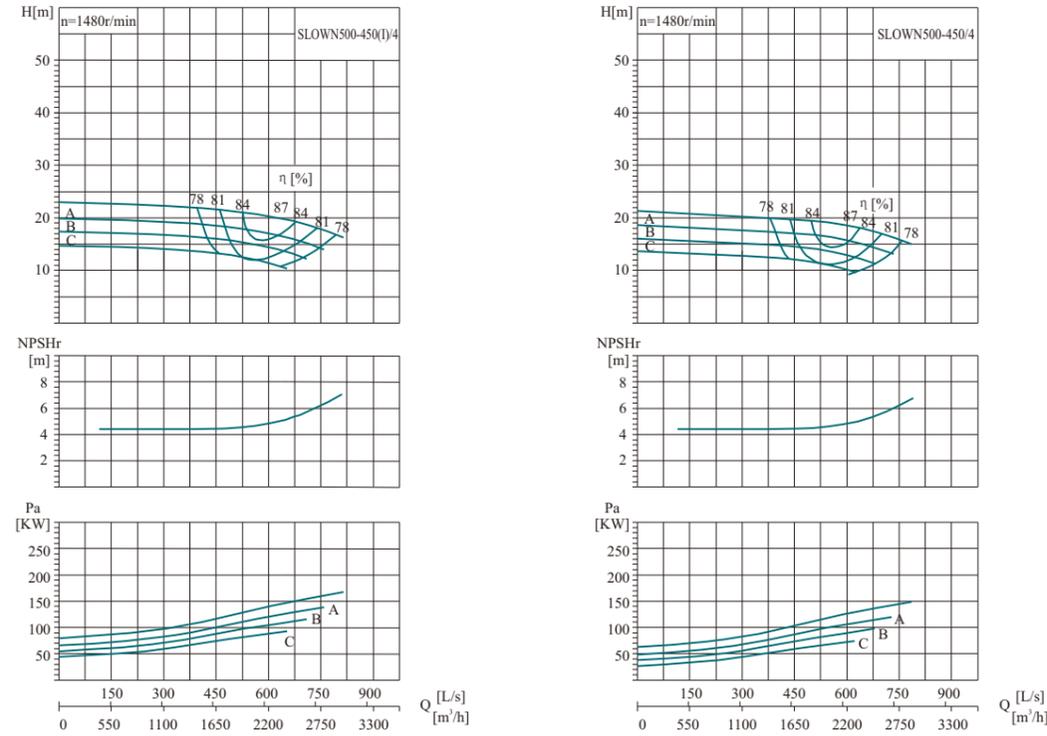


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)		
	(m³/h)	(L/s)									
SLOWN500-450(I)/6	A	1380	383.3	22.0	5	980	78	106.0	185	1700	
		2300	638.9	20.0			87	143.9			
		2760	766.7	17.8			84	159.2			
		1283	356.5	19.0			76	87.5			160
		2139	594.2	17.3			85	118.5			
		2567	713.0	15.4			82	131.2			
	B	1201	333.5	16.7			74	73.5	132		
		2001	555.8	15.1			83	99.3			
		2401	667.0	13.5			80	110.1			
	C	1104	306.7	14.1			72	58.8	110		
		1840	511.1	12.8			81	79.2			
		2208	613.3	11.4			78	87.8			
SLOWN500-450/6	A	1328	369.0	20.0	5	980	78	92.8	160	1700	
		2214	614.9	18.5			87	128.3			
		2657	737.9	16.5			84	142.0			
		1242	345.0	17.5			76	77.8			132
		2070	575.0	16.2			85	107.4			
	2484	690.0	14.4	82			118.9				
	B	1152	320.1	15.1			78	60.6	110		
		1921	533.5	13.9			83	87.8			
		2305	640.2	12.4			80	97.3			
		1063	295.2	12.8			72	51.5			90
	1771	491.9	11.9	81			70.6				
	2125	590.3	10.6	78			78.3				

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

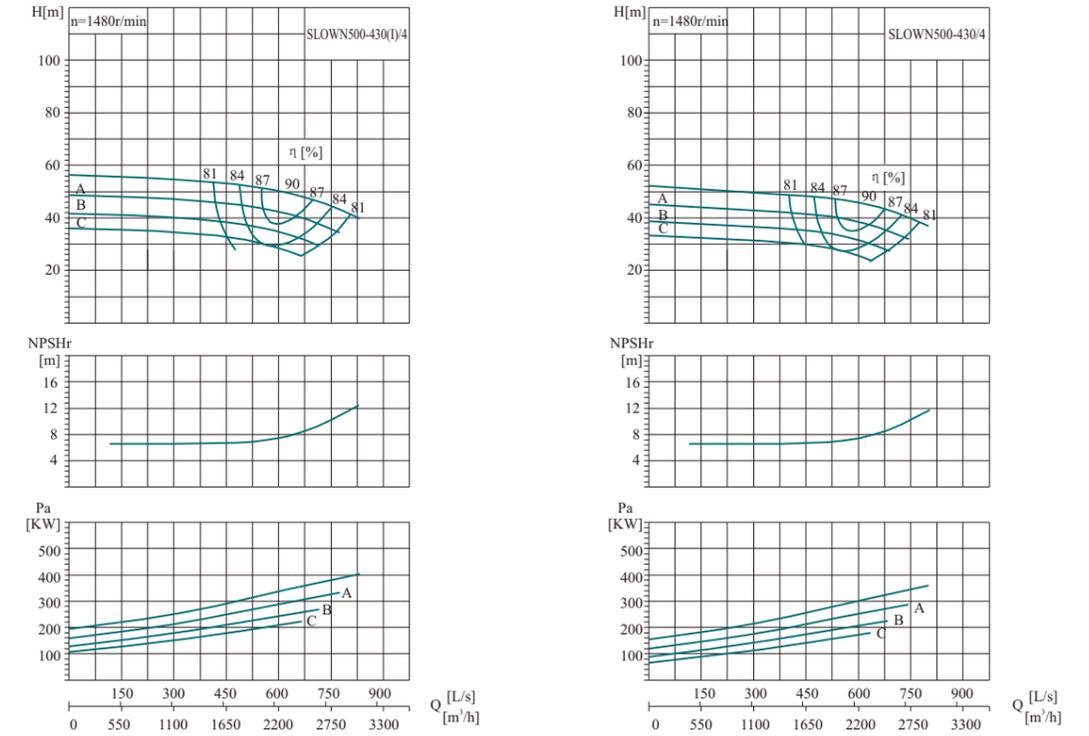


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)		
	(m³/h)	(L/s)									
SLOWN500-430(I)/4	A	1410	391.7	53.9	8	1480	81	255.4	450	1300	
		2350	652.8	49.0			90	348.3			
		2820	783.3	43.6			87	384.8			
		1311	364.3	46.6			79	210.6			400
		2186	607.1	42.4			88	286.5			
		2623	728.5	37.7			85	316.8			
	B	1213	336.8	39.9			77	170.9	315		
		2021	561.4	36.2			86	231.8			
		2425	673.7	32.3			83	256.6			
	C	1128	313.3	34.5			75	141.2	250		
		1880	522.2	31.4			84	191.1			
		2256	626.7	27.9			81	211.6			
SLOWN500-430/4	A	1357	377.0	49.0	8	1480	81	223.6	400	1300	
		2262	628.3	45.4			90	310.6			
		2714	754.0	40.4			87	343.1			
		1262	350.5	42.4			79	184.3			315
		2103	584.2	39.3			88	255.4			
	2524	701.1	34.9	85			282.4				
	B	1170	325.1	36.5			77	150.8	250		
		1951	541.8	33.8			86	208.4			
		2341	650.2	30.0			83	230.6			
		1086	301.6	31.4			75	123.6			220
	1810	502.6	29.1	84			170.4				
	2171	603.2	25.9	81			188.7				

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

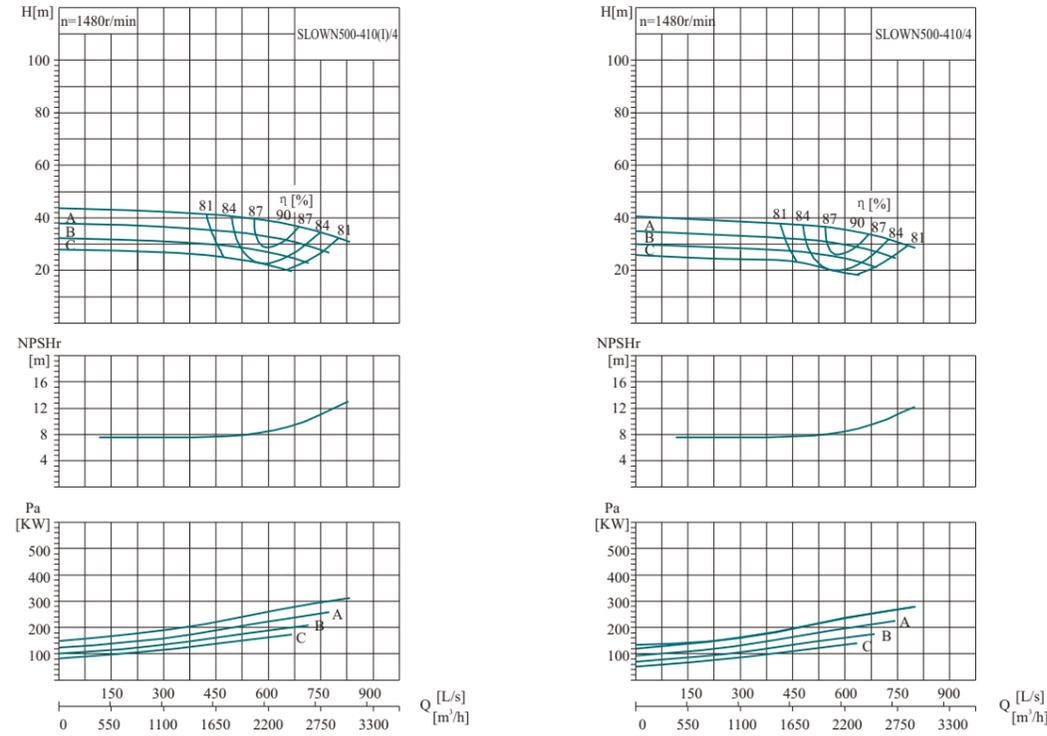


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN500-410(I)/4	A	1410	391.7	41.8	9	81	198.1	315	1200	
		2350	652.8	38.0		90	270.1			
		2820	783.3	33.8		87	298.4			
		1311	364.3	36.2		79	163.4			
		2186	607.1	32.9		88	222.2			
		2623	728.5	29.3		85	245.7			
	B	1213	336.8	30.9		77	132.5	220		
		2021	561.4	28.1		86	179.8			
		2425	673.7	25.0		83	199.0			
		1128	313.3	26.8		75	109.5			200
		1880	522.2	24.3		84	148.2			
		2256	626.7	21.6		81	164.1			
SLOWN500-410/4	A	1357	377.0	38.0	9	81	173.4	280	1200	
		2262	628.3	35.2		90	240.8			
		2714	754.0	31.3		87	266.1			
		1262	350.5	32.9		79	143.0			
		2103	584.2	30.4		88	198.0			
		2524	701.1	27.1		85	219.0			
	B	1170	325.1	28.3		77	117.0	200		
		1951	541.8	26.2		86	161.6			
		2341	650.2	23.3		83	178.9			
		1086	301.6	24.3		75	95.9			185
		1810	502.6	22.5		84	132.1			
		2171	603.2	20.1		81	146.3			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

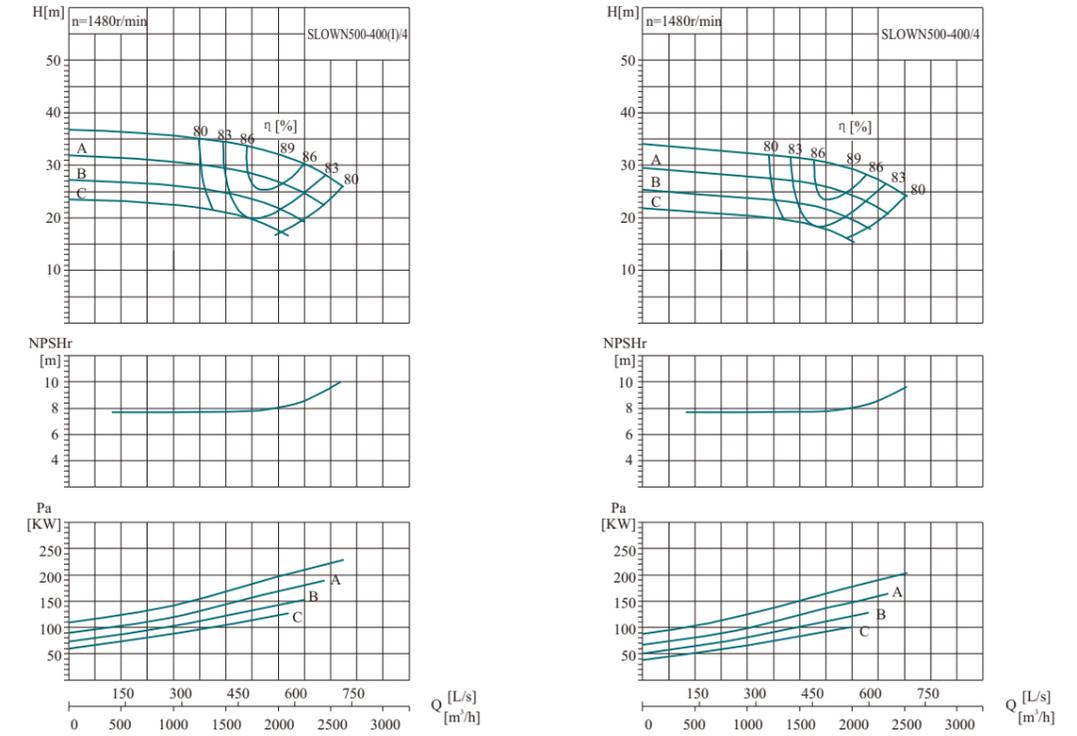


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN500-400(I)/4	A	1212	336.7	35.2	8	80	145.2	250	1050	
		2020	561.1	32.0		89	197.7			
		2424	673.3	28.5		86	218.5			
		1127	313.1	30.4		78	119.8			
		1879	521.8	27.7		87	162.7			
		2254	626.2	24.6		84	180.0			
	B	1042	289.5	26.0		76	97.2	160		
		1737	482.6	23.7		85	131.7			
		2085	579.1	21.1		82	145.8			
		970	269.3	22.5		74	80.4			132
		1616	448.9	20.5		83	108.5			
		1939	538.7	18.2		80	120.3			
SLOWN500-400/4	A	1167	324.0	32.0	8	80	127.1	220	1050	
		1944	540.1	29.6		89	176.3			
		2333	648.1	26.4		86	194.8			
		1085	301.3	27.7		78	104.8			
		1808	502.2	25.6		87	145.0			
		2169	602.6	22.8		84	160.4			
	B	1006	279.4	23.8		76	85.8	160		
		1677	465.7	22.0		85	118.4			
		2012	558.9	19.6		82	131.0			
		933	259.2	20.5		74	70.3			132
		1555	432.1	19.0		83	96.8			
		1866	518.5	16.9		80	107.2			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

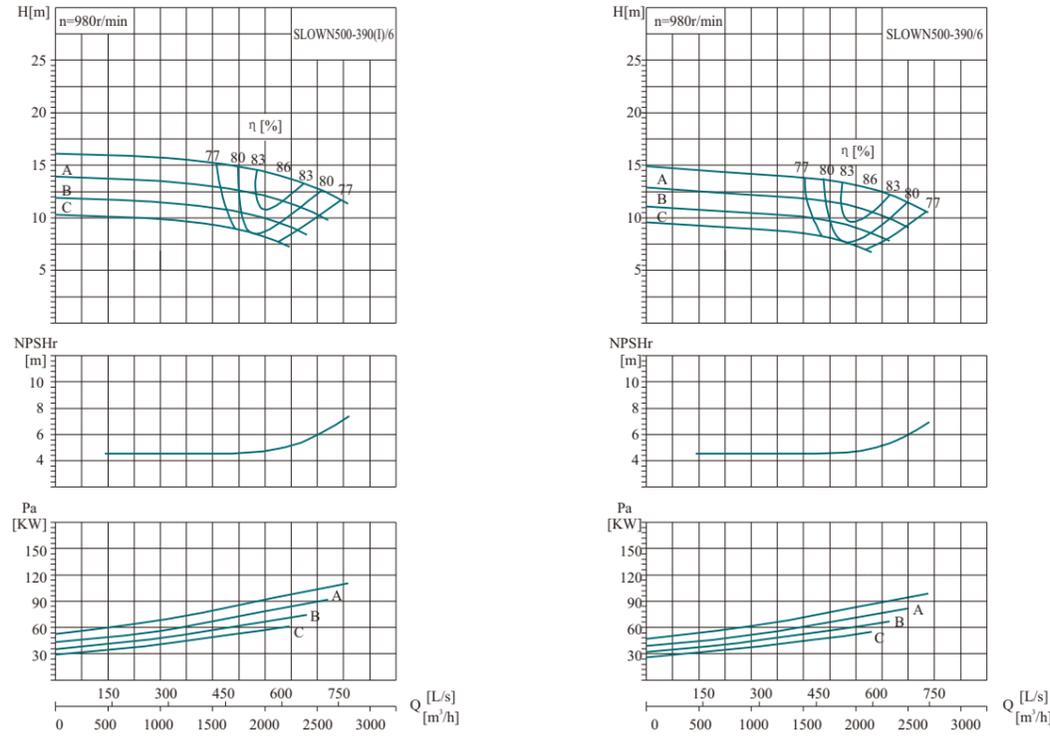


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN500-390(I)/6	A	1290	358.3	15.5	980	77	70.7	132	1400	
		2150	597.2	14.0		86	95.3			
		2580	716.7	12.0		83	101.6			
		1200	333.3	13.3		75	58.0			110
		2000	555.4	12.1		84	78.5			
		2399	666.5	10.8		81	86.9			
	B	1109	308.2	11.4		73	47.1	90		
		1849	513.6	10.4		82	63.6			
		2219	616.3	9.2		79	70.5			
	C	1032	286.7	9.9		71	39.0	75		
		1720	477.8	9.0		80	52.4			
		2064	573.3	8.0		77	58.2			
SLOWN500-390/6	A	1242	344.9	14.0	980	77	61.5	110	1400	
		2069	574.8	13.0		86	85.0			
		2483	689.8	11.5		83	94.0			
		1155	320.7	12.1		75	50.8			90
		1924	534.5	11.2		84	69.9			
	2309	641.4	10.0	81		77.5				
	B	1071	297.4	10.4		73	41.6	75		
		1785	495.7	9.6		82	57.1			
		2141	594.8	8.6		79	63.3			
	C	993	275.9	9.0		71	34.1	55		
		1656	459.9	8.3		80	46.8			
		1987	551.8	7.4		80	46.8			
		1987	551.8	7.4		77	51.9			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

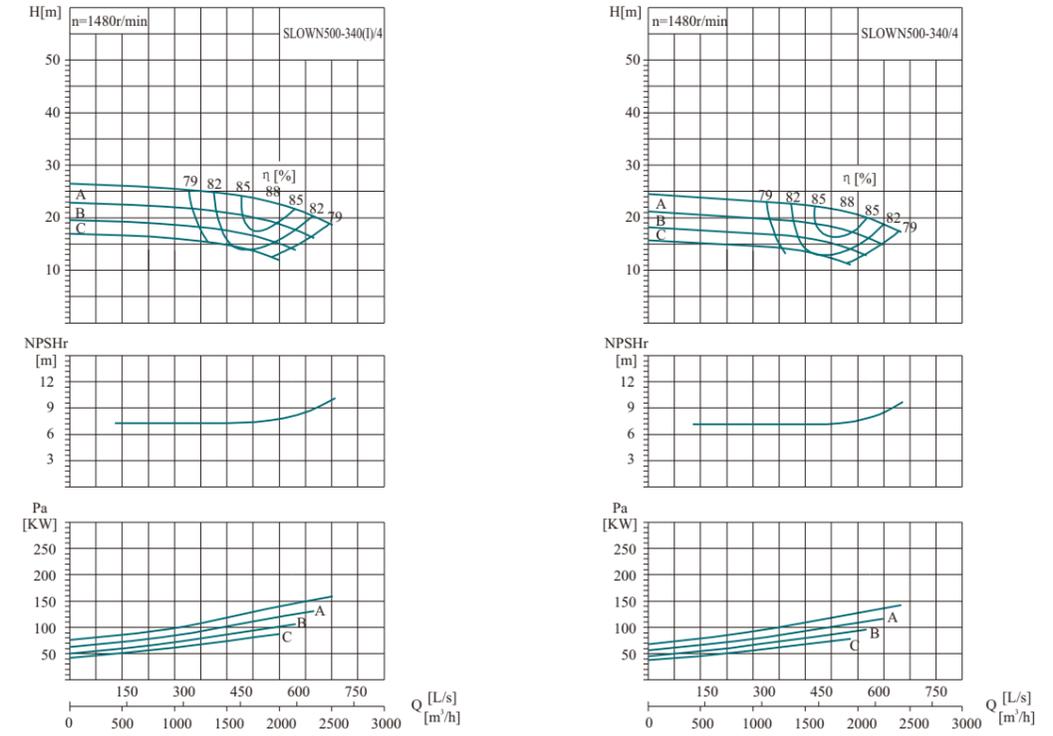


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN500-340(I)/4	A	1158	321.7	25.3	1480	79	101.0	160	1050	
		1930	536.1	23.0		88	137.3			
		2316	643.3	20.5		85	151.8			
		1077	299.2	21.9		77	83.3			132
		1795	498.6	19.9		86	113.0			
		2154	598.3	17.7		83	125.1			
	B	996	276.6	18.7		75	67.6	110		
		1660	461.1	17.0		84	91.5			
		1992	553.3	15.1		81	101.3			
	C	926	257.3	16.2		73	55.9	90		
		1544	428.9	14.7		82	75.5			
		1853	514.7	13.1		79	83.6			
SLOWN500-340/4	A	1115	309.6	23.0	1480	79	88.4	160	1050	
		1858	516.0	21.3		88	122.4			
		2229	619.2	19.0		85	135.4			
		1036	287.9	19.9		77	72.9			132
		1727	479.8	18.4		86	100.7			
	2073	575.8	16.4	83		111.5				
	B	961	267.0	17.1		75	59.7	110		
		1602	445.0	15.8		84	82.3			
		1922	534.0	14.1		81	91.1			
	C	892	247.7	14.7		73	49.0	75		
		1486	412.8	13.6		82	67.3			
		1783	495.4	12.1		82	67.3			
		1783	495.4	12.1		79	74.6			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

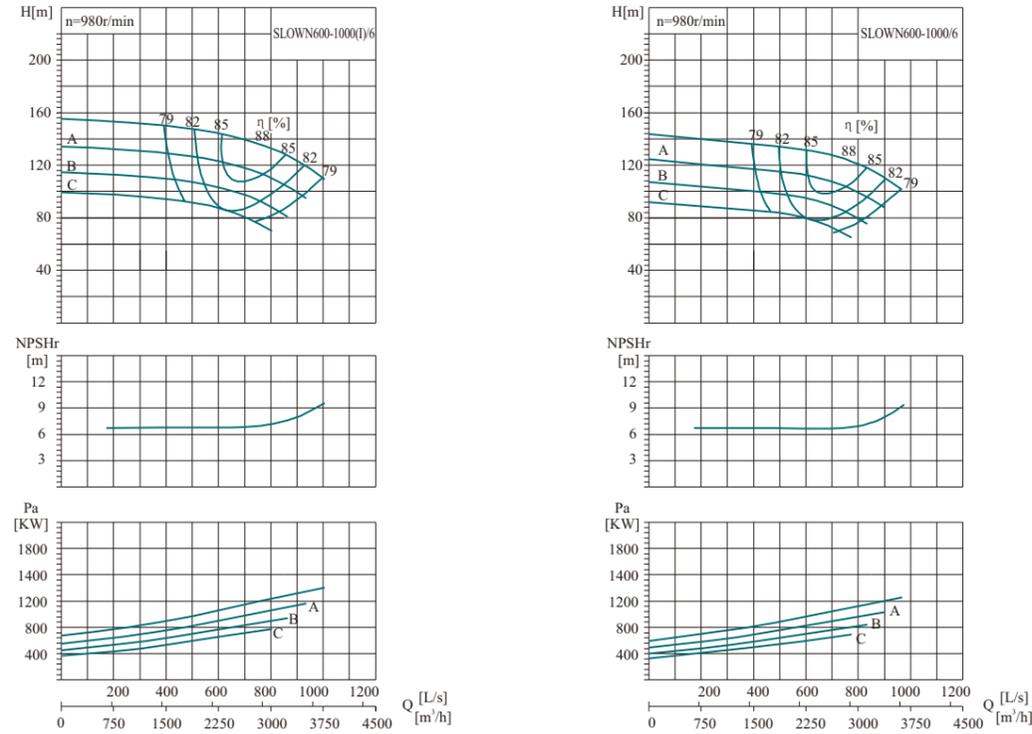


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-1000(I)/6		1740	483.3	148.5	980	79	890.4	1400	3150
		2900	805.6	135.0		88	1211.1		
		3480	966.7	120.2		85	1339.1		
	A	1618	449.5	128.4	77	734.8	1250		
		2697	749.2	116.8	86	996.8			
		3236	899.0	103.9	83	1103.1			
	B	1496	415.7	109.8	75	596.5	1000		
		2494	692.8	99.8	84	807.0			
		2993	831.3	88.9	81	893.8			
	C	1392	386.7	95.0	73	493.3	800		
		2320	644.4	86.4	82	665.4			
		2784	773.3	76.9	79	737.7			
SLOWN600-1000/6		1675	465.2	135.1	980	79	779.5	1250	3150
		2791	775.3	125.1		88	1079.9		
		3350	930.4	111.3		85	1194.0		
	A	1557	432.6	116.8	77	643.0	1000		
		2596	721.0	108.1	86	888.4			
		3115	865.2	96.2	83	983.1			
	B	1444	401.2	100.4	75	526.5	900		
		2407	668.6	93.0	84	725.5			
		2888	802.3	82.8	81	803.5			
	C	1340	372.2	86.4	73	431.9	710		
		2233	620.3	80.0	82	593.4			
		2680	744.3	71.2	79	657.8			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

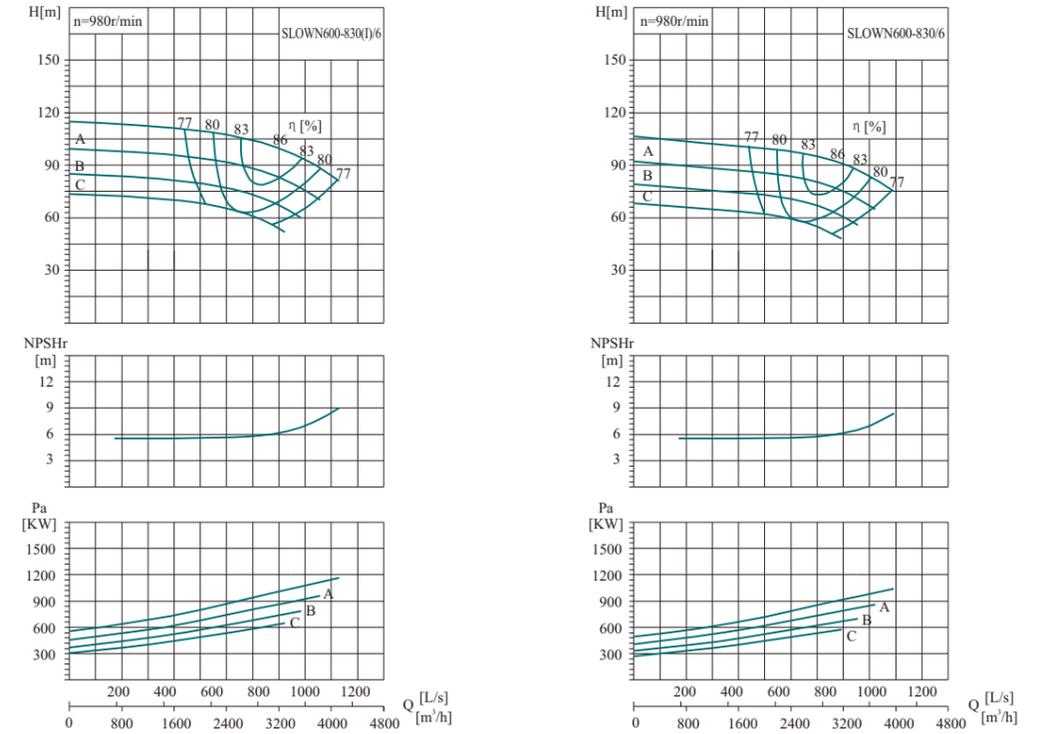


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-830(I)/6		1902	528.3	110.0	980	77	739.7	1250	4400
		3170	880.6	100.0		86	1003.4		
		3804	1056.7	89.0		83	1110.4		
	A	1769	491.4	95.1	75	610.8	1000		
		2948	818.9	86.5	84	826.3			
		3538	982.7	77.0	81	915.2			
	B	1636	454.4	81.4	73	496.2	800		
		2726	757.3	74.0	82	669.4			
		3271	908.7	65.8	79	742.0			
	C	1522	422.7	70.4	71	410.7	710		
		2536	704.4	64.0	80	552.3			
		3043	845.3	57.0	77	612.8			
SLOWN600-830/6		1831	508.5	100.1	980	77	647.5	1120	4400
		3051	847.5	92.6		86	894.7		
		3661	1017.0	82.5		83	990.1		
	A	1702	472.9	86.5	75	534.5	900		
		2837	788.1	80.1	84	736.5			
		3405	945.7	71.3	81	815.7			
	B	1579	438.5	74.4	73	438.0	710		
		2631	730.9	68.9	82	601.7			
		3157	877.0	61.3	79	667.1			
	C	1465	406.8	64.0	71	359.6	630		
		2441	678.0	59.3	80	492.5			
		2929	813.6	52.8	77	546.4			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

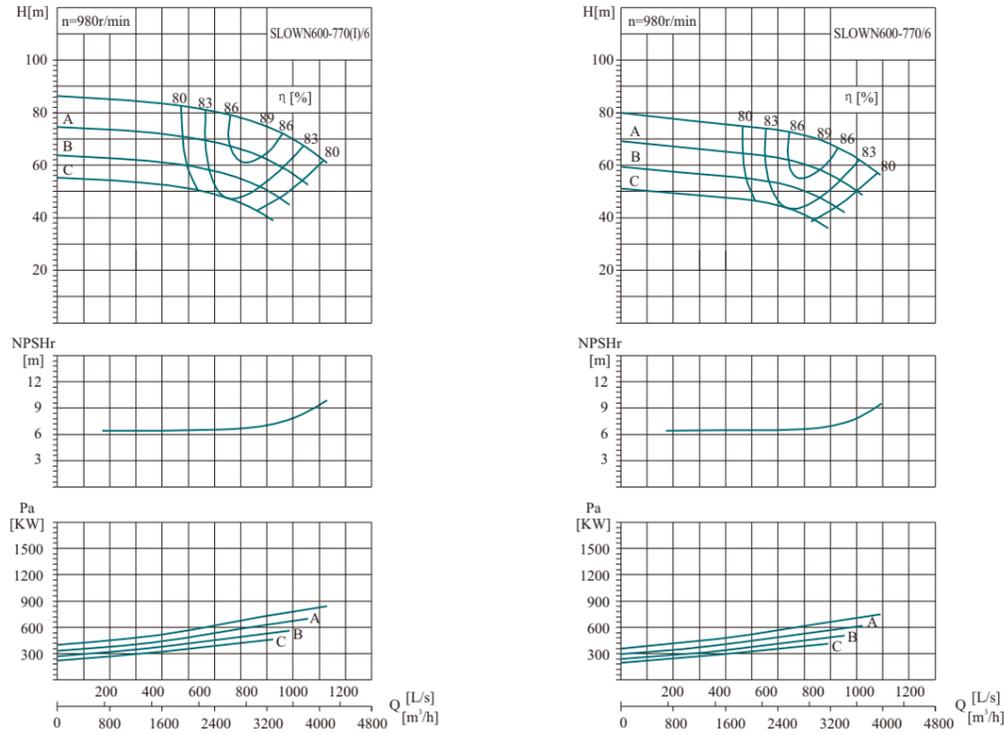


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-770(I)/6		1902	528.3	6.7	980	80	533.9	900	2800
		3170	880.6			89	727.2		
		3804	1056.7			86	803.7		
	A	1769	491.4			78	440.5	710	
		2948	818.9			87	598.4		
		3538	982.7			84	661.9		
	B	1636	454.4			76	357.5	630	
		2726	757.3			85	484.3		
		3271	908.7			82	536.2		
	C	1522	422.7			74	295.5	500	
		2536	704.4			83	399.2		
		3043	845.3			80	442.4		
SLOWN600-770/6		1831	508.5	6.7	980	80	467.4	800	2800
		3051	847.5			89	648.4		
		3661	1017.0			86	716.7		
	A	1702	472.9			78	385.5	630	
		2837	788.1			87	533.3		
		3405	945.7			84	589.9		
	B	1579	438.5			76	315.5	500	
		2631	730.9			85	435.4		
		3157	877.0			82	482.0		
	C	1465	406.8			74	258.7	450	
		2441	678.0			83	356.0		
		2929	813.6			80	394.5		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

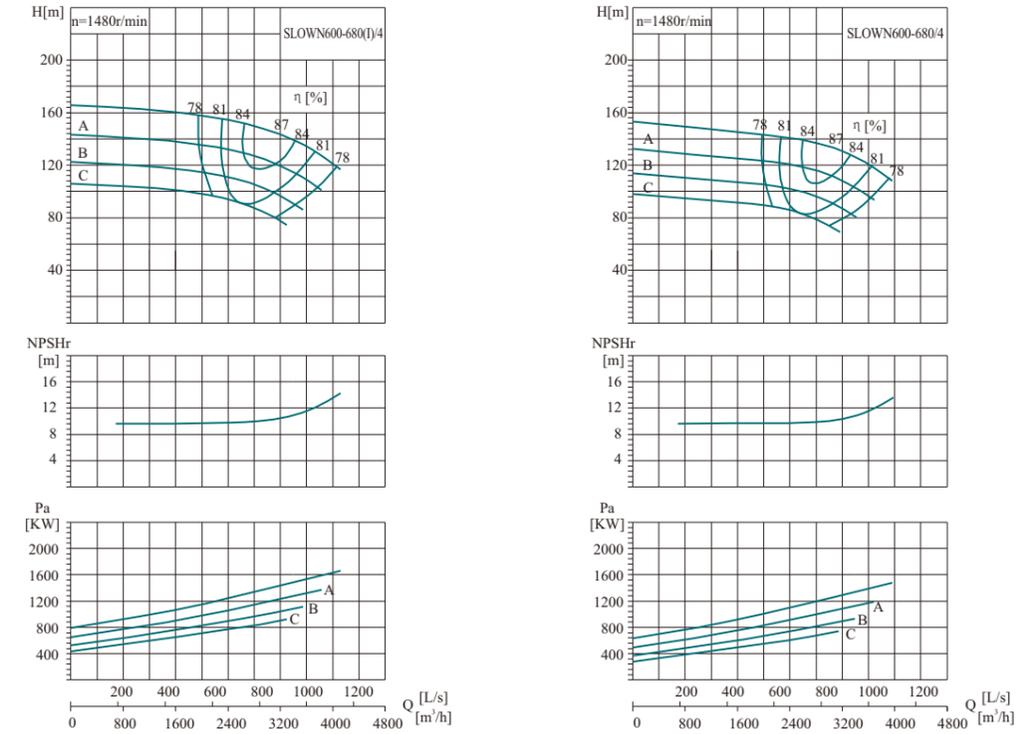


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-680(I)/4		1902	528.3	10.6	1480	78	1051.5	1600	2400
		3170	880.6			87	1428.3		
		3804	1056.7			84	1579.9		
	A	1769	491.4			76	868.0	1250	
		2948	818.9			85	1175.9		
		3538	982.7			82	1301.8		
	B	1636	454.4			74	704.9	1120	
		2726	757.3			83	952.3		
		3271	908.7			80	1055.2		
	C	1522	422.7			72	583.2	900	
		2536	704.4			81	785.5		
		3043	845.3			78	871.1		
SLOWN600-680/4		1831	508.5	10.6	1480	78	920.5	1400	2400
		3051	847.5			87	1273.6		
		3661	1017.0			84	1408.8		
	A	1702	472.9			76	759.6	1250	
		2837	788.1			85	1048.1		
		3405	945.7			82	1160.3		
	B	1579	438.5			74	622.2	1000	
		2631	730.9			83	856.1		
		3157	877.0			80	948.6		
	C	1465	406.8			72	510.6	800	
		2441	678.0			81	700.4		
		2929	813.6			78	776.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

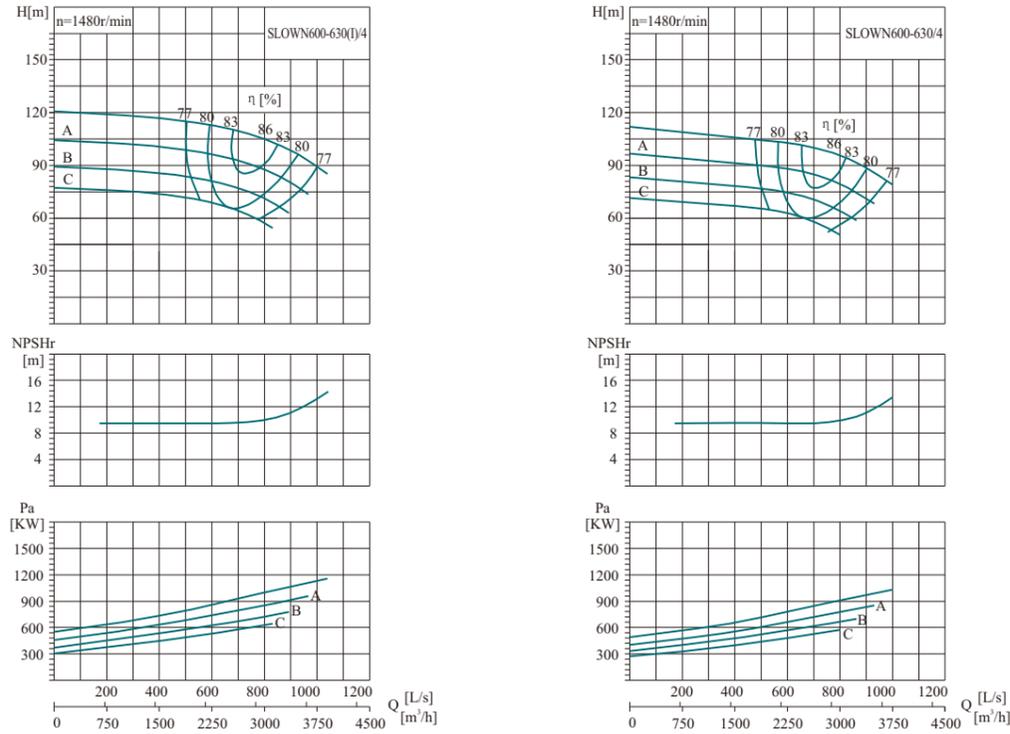


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-630(I)4		1800	500.0	115.5	10	77	735.0	1250	2500
		3000	833.3	105.0		86	997.1		
		3600	1000.0	93.5		83	1103.4		
	A	1674	465.0	99.9		75	607.0	1000	
		2790	775.0	90.8		84	821.1		
		3348	930.0	80.8		81	909.4		
	B	1548	430.0	85.4		73	493.1	800	
		2580	716.7	77.7		82	665.1		
		3096	860.0	69.1		79	737.3		
	C	1440	400.0	73.9		71	408.1	630	
		2400	666.7	67.2		80	548.8		
		2880	800.0	59.8		77	609.0		
SLOWN600-630/4		1733	481.3	105.1	10	77	643.5	1000	2500
		2888	802.1	97.3		86	889.1		
		3465	962.5	86.6		83	983.9		
	A	1611	447.5	90.8		75	531.1	900	
		2685	745.8	84.1		84	731.9		
		3222	895.0	74.9		81	810.6		
	B	1494	415.0	78.1		73	435.2	710	
		2490	691.7	72.3		82	597.9		
		2988	830.0	64.4		79	662.8		
	C	1386	385.0	67.2		71	357.3	560	
		2310	641.7	62.3		80	489.3		
		2772	770.0	55.4		77	543.0		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

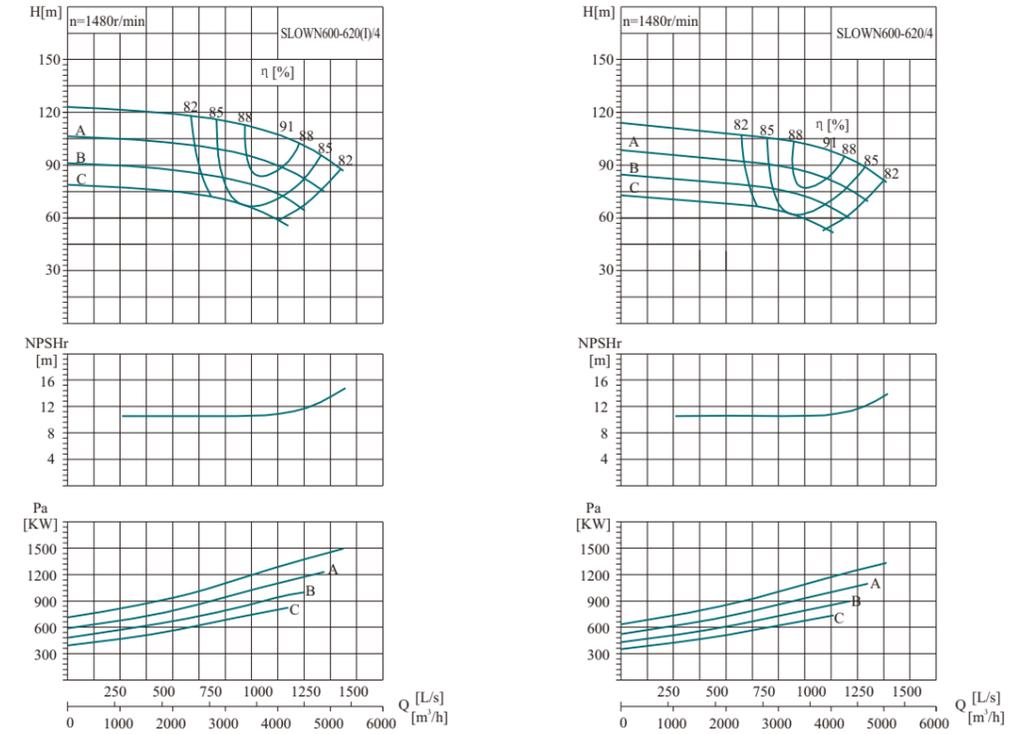


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-620(I)4		2424	673.3	117.7	11.5	82	947.2	1600	2800
		4040	1122.2	107.0		91	1293.1		
		4848	1346.7	95.2		88	1428.2		
	A	2254	626.2	101.8		80	780.9	1250	
		3757	1043.7	92.5		89	1063.5		
		4509	1252.4	82.4		86	1175.5		
	B	2085	579.1	87.1		78	633.3	1120	
		3474	965.1	79.1		87	860.3		
		4169	1158.1	71.2		84	962.3		
	C	1939	538.7	75.3		76	523.2	900	
		3232	897.8	68.5		85	708.8		
		3878	1077.3	60.9		82	784.7		
SLOWN600-620/4		2333	648.1	107.1	11.5	82	829.2	1400	2800
		3889	1080.1	99.1		91	1153.1		
		4666	1296.2	84.3		88	1216.2		
	A	2169	602.6	92.6		80	683.3	1120	
		3616	1004.4	85.7		89	947.9		
		4339	1205.3	72.9		86	1000.6		
	B	2012	558.9	79.6		78	559.0	900	
		3353	931.4	73.7		87	773.4		
		4024	1117.7	65.6		84	855.5		
	C	1866	518.5	68.5		76	458.1	710	
		3111	864.1	63.4		85	632.0		
		3733	1036.9	56.5		82	699.7		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

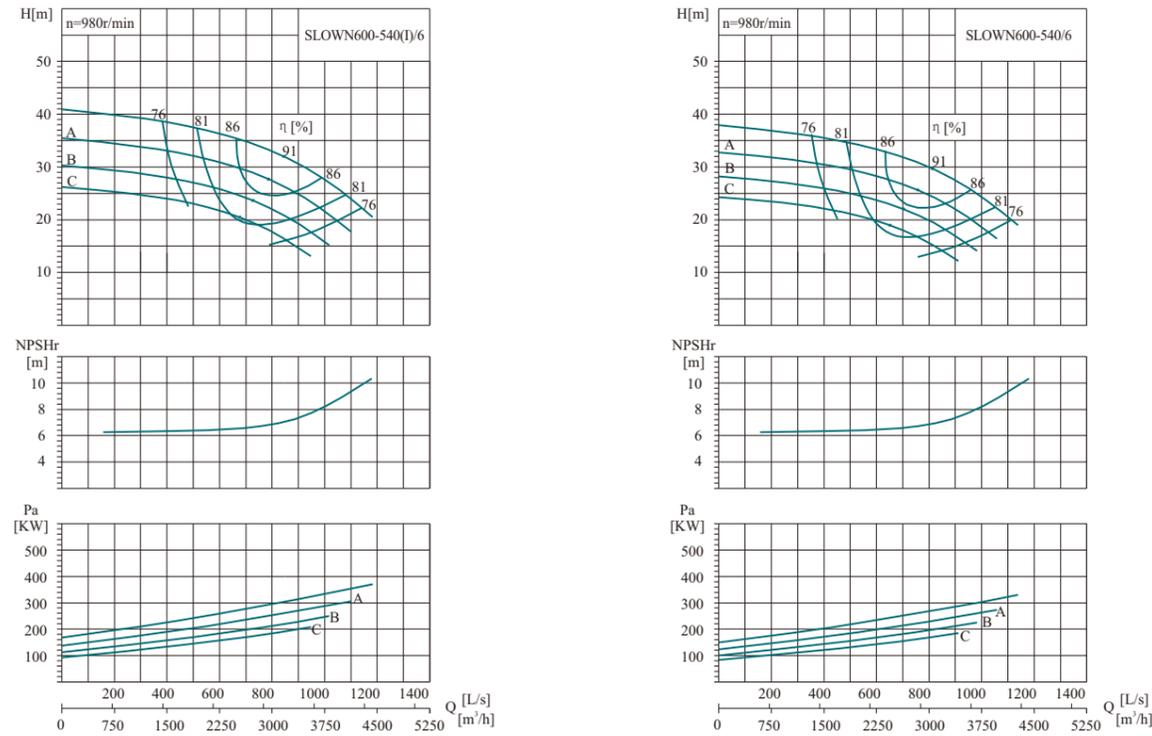


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-540(I)/6		1902	528.3	35.2	7	82	222.3	355	2400
		3170	880.6	32.0		91	303.5		
		3804	1056.7	28.8		88	338.9		
	A	1769	491.4	30.4		80	183.2	315	
		2948	818.9	27.7		89	249.6		
		3538	982.7	23.5		86	263.4		
	B	1636	454.4	26.0		78	148.6	250	
		2726	757.3	23.7		87	201.9		
		3271	908.7	21.3		84	225.8		
	C	1522	422.7	22.5		76	122.8	200	
		2536	704.4	20.5		85	166.3		
		3043	845.3	18.4		82	186.2		
SLOWN600-540/6		1831	508.5	32.0	7	82	194.6	315	2400
		3051	847.5	29.6		91	270.6		
		3661	1017.0	25.2		88	285.4		
	A	1702	472.9	27.7		80	160.4	280	
		2837	788.1	25.6		89	222.4		
		3405	945.7	21.8		86	234.8		
	B	1579	438.5	23.8		78	131.2	220	
		2631	730.9	22.0		87	181.5		
		3157	877.0	18.7		84	191.7		
	C	1465	406.8	20.5		76	107.5	185	
		2441	678.0	19.0		85	148.3		
		2929	813.6	16.1		82	156.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

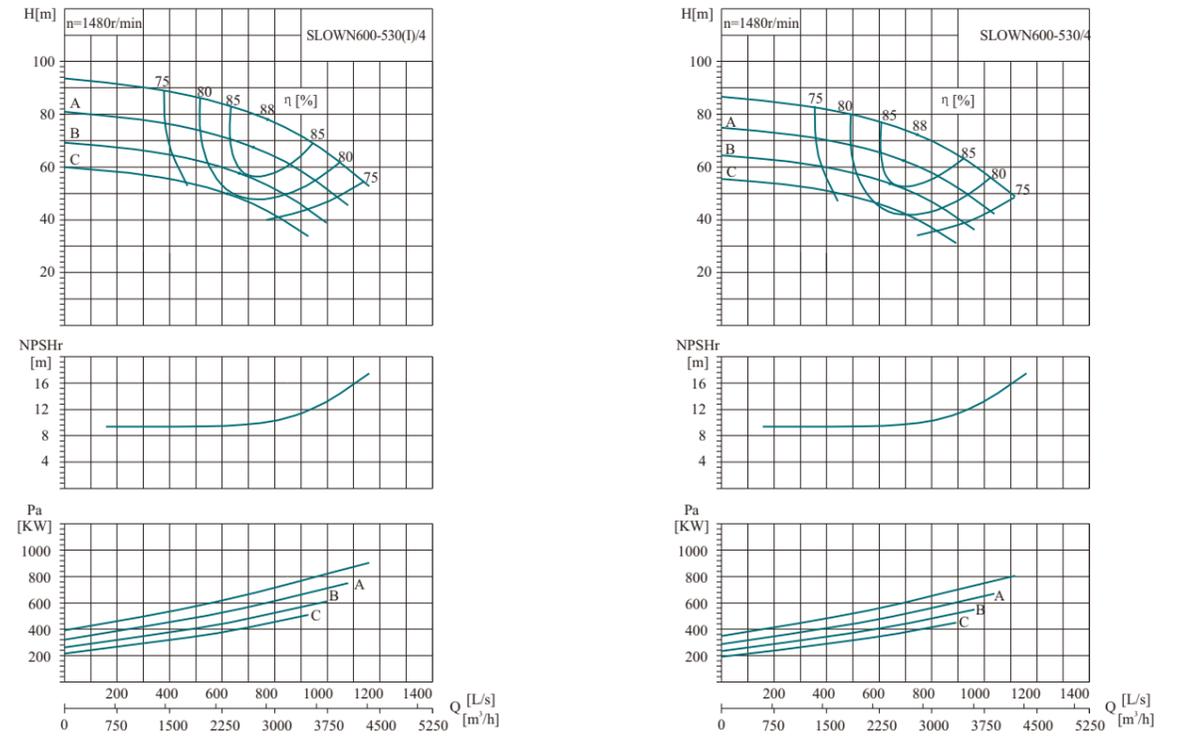


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-530(I)/4		1800	500.0	85.8	10	79	532.2	900	1800
		3000	833.3	78.0		88	723.9		
		3600	1000.0	70.2		85	809.4		
	A	1674	465.0	74.2		77	439.2	710	
		2790	775.0	67.5		86	595.8		
		3348	930.0	60.7		83	666.7		
	B	1548	430.0	63.5		75	356.5	630	
		2580	716.7	57.7		84	482.3		
		3096	860.0	51.9		81	540.2		
	C	1440	400.0	54.9		73	294.9	500	
		2400	666.7	49.9		82	397.7		
		2880	800.0	44.9		79	445.9		
SLOWN600-530/4		1733	481.3	78.0	10	79	465.9	800	1800
		2888	802.1	72.3		88	645.4		
		3465	962.5	61.4		85	681.6		
	A	1611	447.5	67.5		77	384.3	630	
		2685	745.8	62.5		86	531.0		
		3222	895.0	53.1		83	561.2		
	B	1494	415.0	58.0		75	314.7	500	
		2490	691.7	53.7		84	433.6		
		2988	830.0	45.7		81	458.7		
	C	1386	385.0	49.9		73	258.1	450	
		2310	641.7	46.2		82	354.6		
		2772	770.0	39.3		79	375.5		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

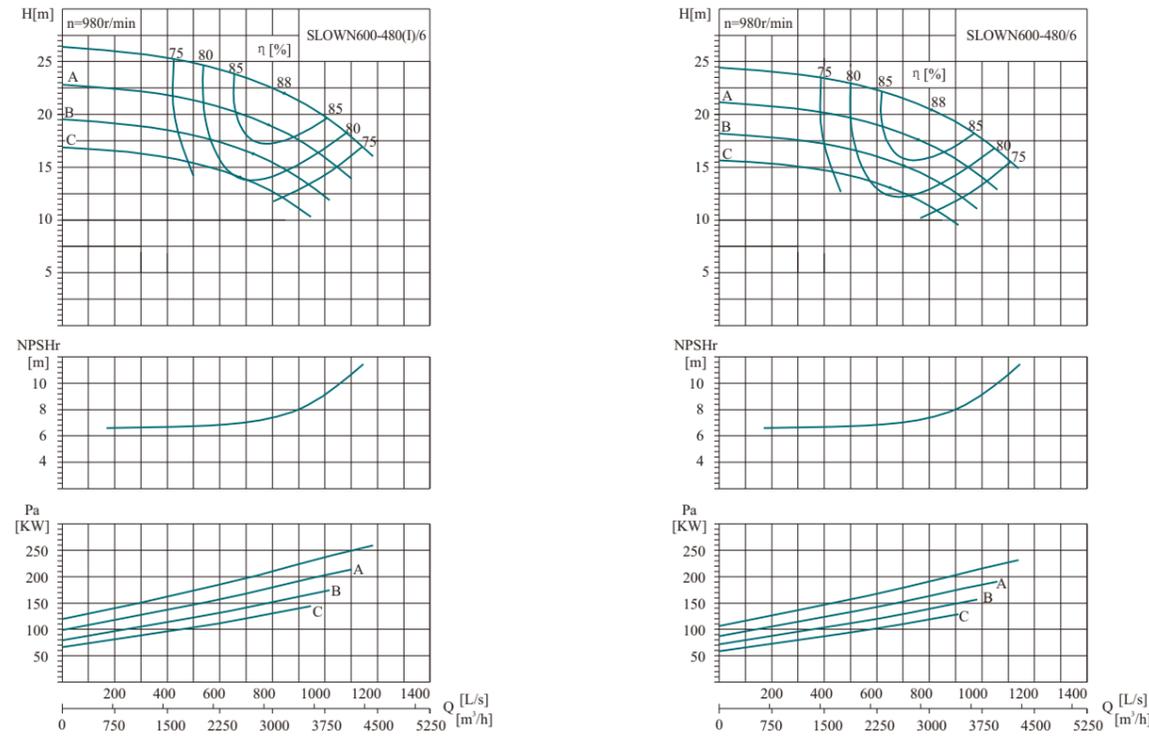


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN600-480(I)/6		1902	528.3	24.2	980	79	158.6	250	2250
		3170	880.6	22.0		88	215.7		
		3804	1056.7	19.8		85	241.2		
	A	1769	491.4	20.9		77	130.9	220	
		2948	818.9	19.0		86	177.6		
		3538	982.7	17.1		83	198.7		
	B	1636	454.4	17.9		75	106.3	185	
		2726	757.3	16.3		84	143.8		
		3271	908.7	14.6		81	161.0		
	C	1522	422.7	15.5		73	87.9	160	
		2536	704.4	14.1		82	118.5		
		3043	845.3	12.7		79	132.9		
SLOWN600-480/6		1831	508.5	22.0	980	79	138.9	220	2250
		3051	847.5	20.4		88	192.4		
		3661	1017.0	17.3		85	203.1		
	A	1702	472.9	19.0		77	114.5	200	
		2837	788.1	17.6		86	158.3		
		3405	945.7	15.0		83	167.3		
	B	1579	438.5	16.4		75	93.8	160	
		2631	730.9	15.2		84	129.2		
		3157	877.0	12.9		81	136.7		
	C	1465	406.8	14.1		73	76.9	132	
		2441	678.0	13.0		82	105.7		
		2929	813.6	11.1		79	111.9		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

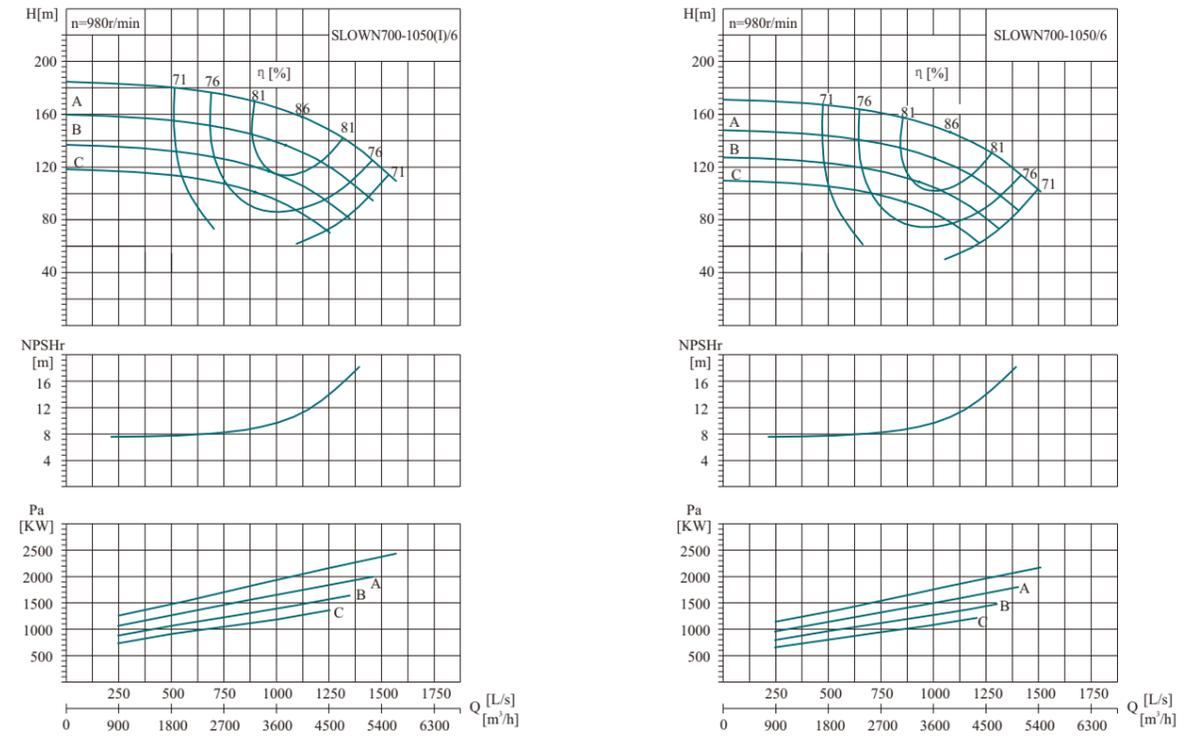


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN700-1050(I)/6		2424	673.3	173.8	980	76	1509.0	2500	4800
		4040	1122.2	158.0		85	2044.3		
		4848	1346.7	142.2		82	2288.6		
	A	2254	626.2	150.3		74	1246.6	2240	
		3757	1043.7	136.7		83	1684.0		
		4509	1252.4	123.0		80	1886.9		
	B	2085	579.1	128.5		72	1013.1	1800	
		3474	965.1	116.9		81	1364.5		
		4169	1158.1	105.2		78	1530.3		
	C	1939	538.7	111.2		70	838.8	1400	
		3232	897.8	101.1		79	1126.2		
		3878	1077.3	91.0		76	1264.3		
SLOWN700-1050/6		2333	648.1	158.1	980	76	1321.1	2240	4800
		3889	1080.1	146.4		85	1822.8		
		4666	1296.2	124.4		82	1927.3		
	A	2169	602.6	136.7		74	1090.9	1800	
		3616	1004.4	126.6		83	1500.9		
		4339	1205.3	107.6		80	1588.3		
	B	2012	558.9	117.6		72	894.2	1400	
		3353	931.4	108.8		81	1226.6		
		4024	1117.7	92.5		78	1299.3		
	C	1866	518.5	101.2		70	734.4	1250	
		3111	864.1	93.7		79	1004.2		
		3733	1036.9	79.6		76	1064.7		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

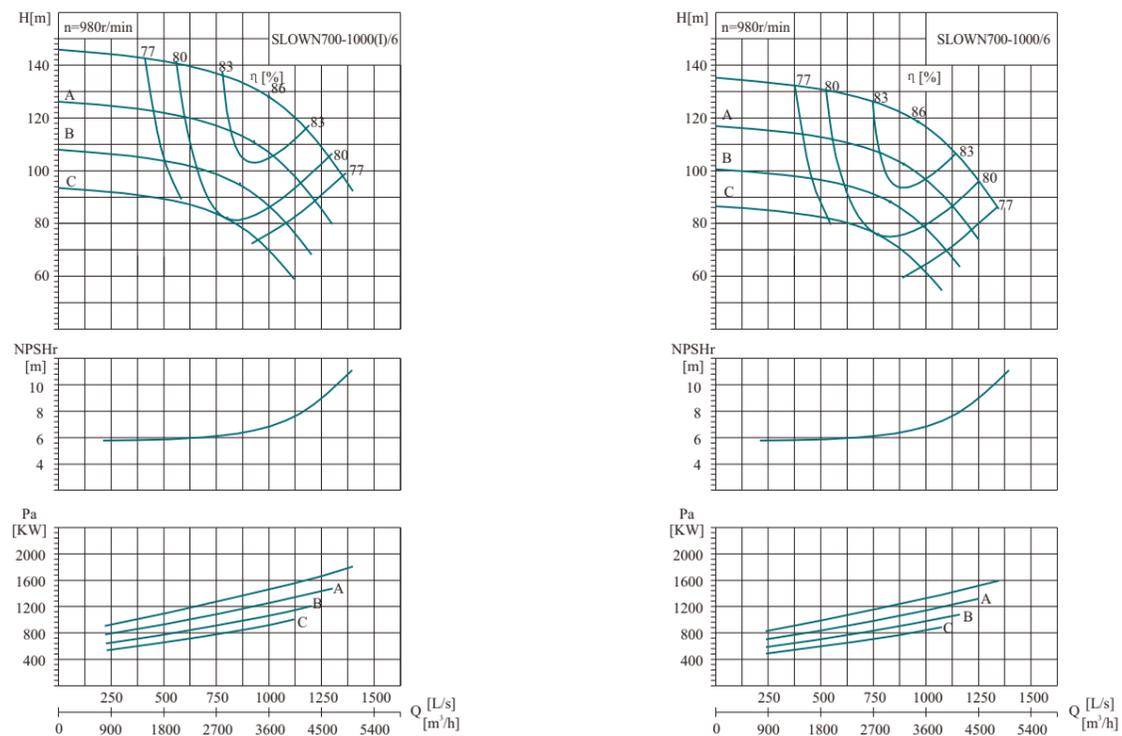


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN700-1000(I)/6	A	2160	600.0	138.2	980	77	1055.7	1800	4600	
		3600	1000.0	128.0		86	1458.6			
		4320	1200.0	108.8		83	1541.6			
		2009	558.0	119.6		75	871.8			1400
		3348	930.0	110.7		84	1201.2			
		4018	1116.0	94.1		81	1270.6			
	B	1858	516.0	102.2		73	708.2	1120		
		3096	860.0	94.7		82	973.0			
		3715	1032.0	80.5		79	1030.2			
	C	1728	480.0	88.5		71	586.2	1000		
		2880	800.0	81.9		80	802.8			
		3456	960.0	69.6		77	850.8			
SLOWN700-1000/6	A	2079	577.5	128.1	980	77	941.3	1600	4600	
		3465	962.5	118.6		86	1300.6			
		4158	1155.0	100.8		83	1374.5			
		1933	537.0	110.7		75	777.0			1250
		3222	895.0	102.5		84	1070.6			
		3866	1074.0	87.2		81	1132.5			
	B	1793	498.0	95.2		77	603.6	1000		
		2988	830.0	88.2		82	874.7			
		3586	996.0	75.0		79	926.1			
	C	1663	462.0	82.0		71	522.7	900		
		2772	770.0	75.9		80	715.8			
		3326	924.0	64.5		77	758.6			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

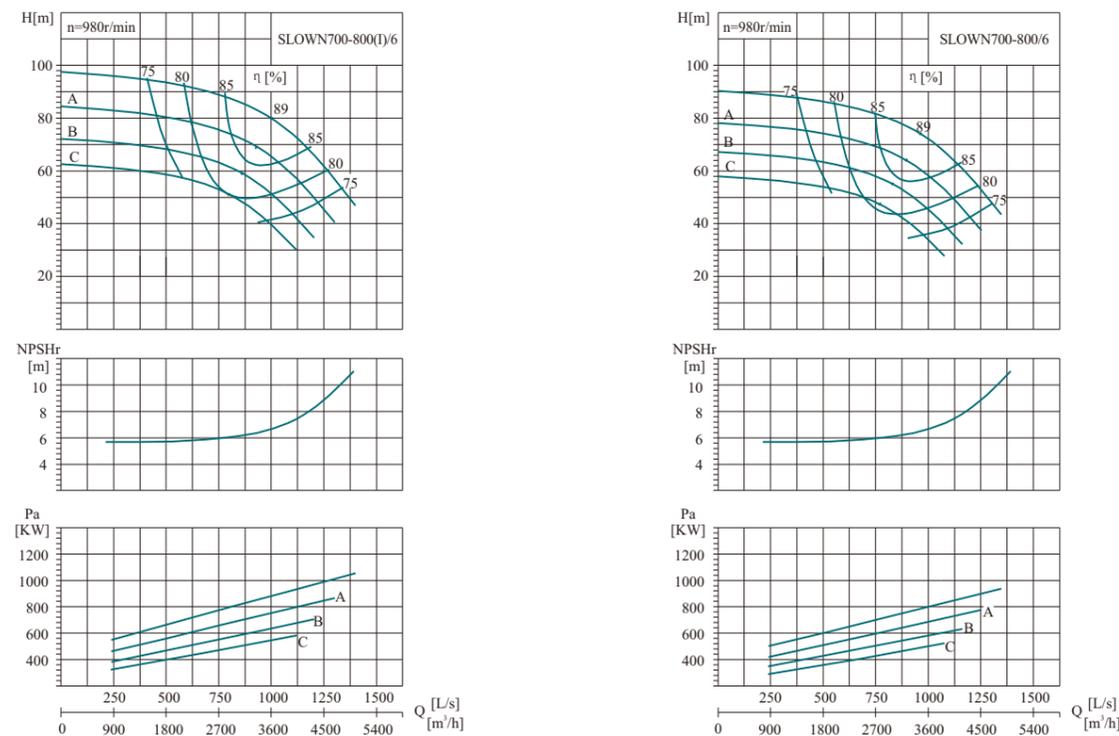


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN700-800(I)/6	A	2160	600.0	86.4	980	80	635.0	1120	4400	
		3600	1000.0	80.0		89	880.9			
		4320	1200.0	68.0		86	929.9			
		2009	558.0	74.7		78	523.9			900
		3348	930.0	69.2		87	724.8			
		4018	1116.0	58.8		84	765.7			
	B	1858	516.0	63.9		76	425.2	710		
		3096	860.0	59.2		85	586.7			
		3715	1032.0	50.3		82	620.3			
	C	1728	480.0	55.3		74	351.5	560		
		2880	800.0	51.2		83	483.6			
		3456	960.0	43.5		80	511.8			
SLOWN700-800/6	A	2079	577.5	80.0	980	80	566.2	1000	4400	
		3465	962.5	74.1		89	785.5			
		4158	1155.0	63.0		86	829.1			
		1933	537.0	69.2		78	466.9			800
		3222	895.0	64.1		87	646.0			
		3866	1074.0	54.5		84	682.5			
	B	1793	498.0	59.5		76	382.2	630		
		2988	830.0	55.1		85	527.4			
		3586	996.0	46.8		82	557.6			
	C	1663	462.0	51.2		74	313.4	500		
		2772	770.0	47.4		83	431.2			
		3326	924.0	40.3		80	456.4			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

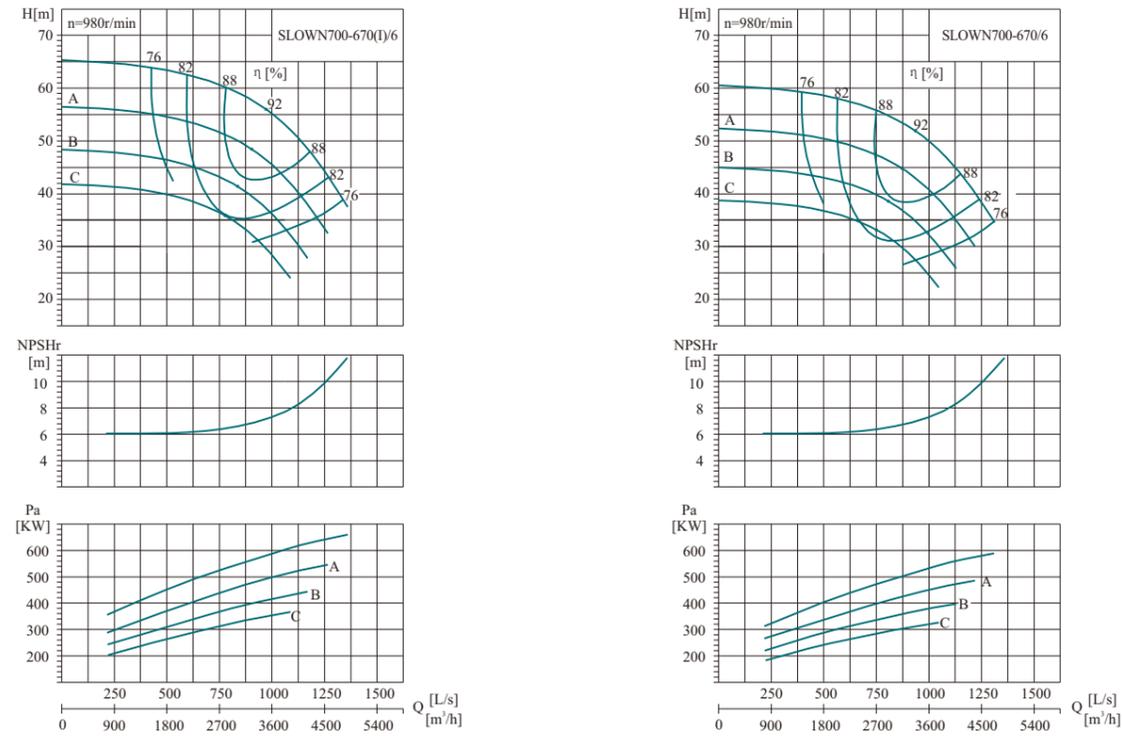


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)		
	(m³/h)	(L/s)									
SLOWN700-670(I)/6	A	2100	583.3	60.5	7	980	83	416.6	710	3300	
		3500	972.2	56.0			92	580.0			
		4200	1166.7	47.6			89	611.5			
		1953	542.5	52.3			81	343.3			560
		3255	904.2	48.4			90	476.9			
		3906	1085.0	41.2			87	503.2			
	B	1806	501.7	44.7			79	278.4	450		
		3010	836.1	41.4			88	385.6			
		3612	1003.3	35.2			85	407.2			
	C	1680	466.7	38.7			77	229.9	400		
		2800	777.8	35.8			86	317.7			
		3360	933.3	30.5			83	335.7			
SLOWN700-670/6	A	2021	561.5	56.0	7	980	83	371.4	630	3300	
		3369	935.8	51.9			92	517.1			
		4043	1122.9	44.1			89	545.2			
	A	1880	522.1	48.4			81	306.0	500		
		3133	870.1	44.9			90	425.0			
		3759	1044.2	38.1			87	448.5			
	B	1743	484.2	41.7			79	250.2	400		
		2905	806.9	38.6			88	346.7			
		3486	968.3	32.8			85	366.1			
	C	1617	449.2	35.9			77	205.0	355		
		2695	748.6	33.2			86	283.2			
		3234	898.3	28.2			83	299.3			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

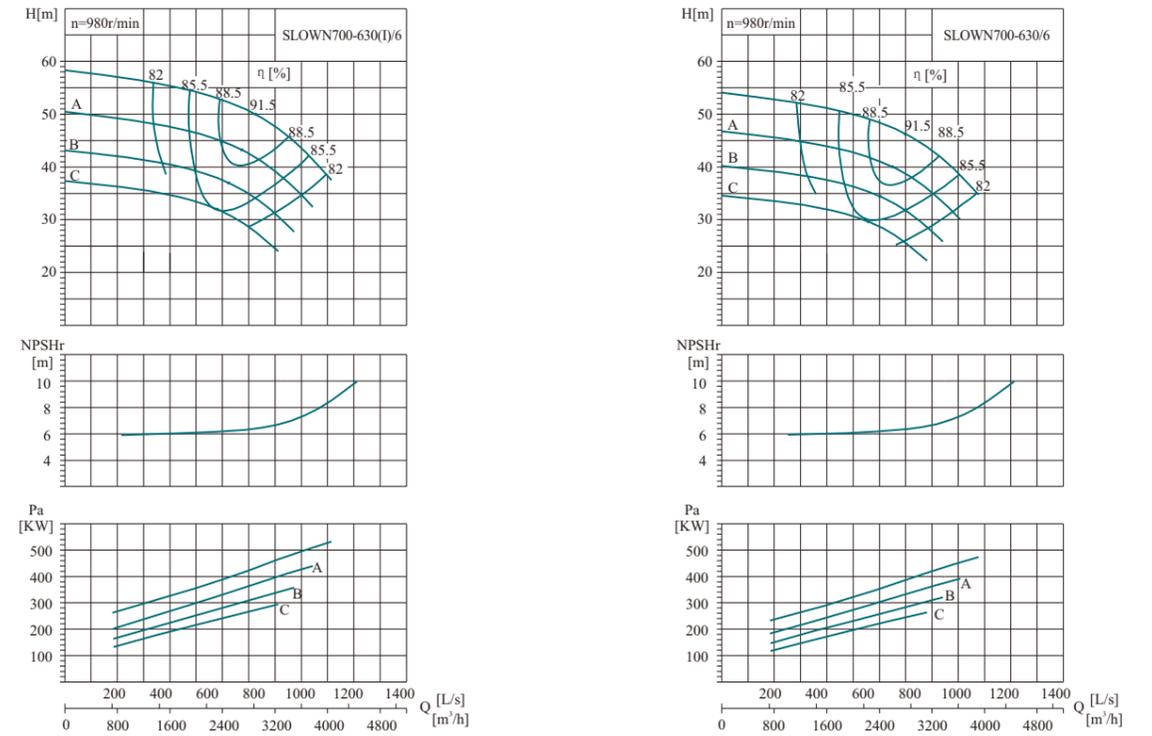


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN700-630(I)/6	A	1740	483.3	55.0	6	980	82.5	315.8	560	3200
		2900	805.6	50.0			91.5	431.4		
		3480	966.7	45.0			88.5	481.7		
	A	1618	449.5	47.6			80.5	260.3	450	
		2697	749.2	43.2			89.5	354.7		
		3236	899.0	38.9			86.5	396.4		
	B	1496	415.7	40.7			78.5	211.1	400	
		2494	692.8	37.0			87.5	286.9		
		2993	831.3	33.3			84.5	320.9		
	C	1392	386.7	35.2			76.5	174.4	315	
		2320	644.4	32.0			85.5	236.4		
		2784	773.3	28.8			82.5	264.6		
SLOWN700-630/6	A	1675	465.2	50.0	6	980	82.5	276.4	500	3200
		2791	775.3	46.3			91.5	384.7		
		3350	930.4	39.4			88.5	405.6		
	A	1557	432.6	43.3			80.5	227.8	400	
		2596	721.0	40.1			89.5	316.2		
		3115	865.2	34.0			86.5	333.7		
	B	1444	401.2	37.2			78.5	186.3	315	
		2407	668.6	34.4			87.5	257.9		
		2888	802.3	29.3			84.5	272.4		
	C	1340	372.2	32.0			76.5	152.6	280	
		2233	620.3	29.6			85.5	210.8		
		2680	744.3	25.2			82.5	222.8		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

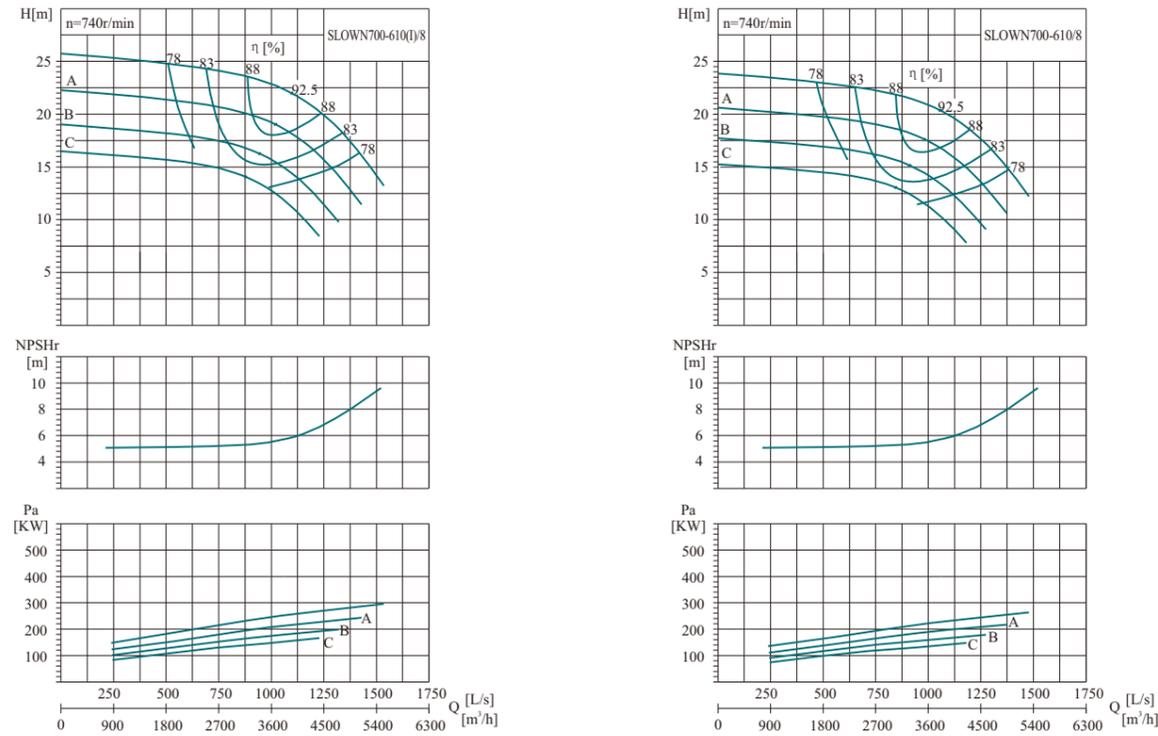


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN700-610(I)/8	A	2370	658.3	5.7	740	83.5	181.9	315	3500
		3950	1097.2			92.5	255.7		
		4740	1316.7			89.5	267.1		
		2204	612.3			81.5	149.9	250	
		3674	1020.4			90.5	210.3		
		4408	1224.5			87.5	219.8		
	B	2038	566.2	79.5	121.5	220			
		3397	943.6	88.5	170.0				
		4076	1132.3	85.5	177.9				
	C	1896	526.7	77.5	100.4	185			
		3160	877.8	86.5	140.1				
		3792	1053.3	83.5	146.6				
SLOWN700-610/8	A	2281	633.6	5.7	740	83.5	162.2	280	3500
		3802	1056.1			92.5	226.0		
		4562	1267.3			89.5	238.2		
		2121	589.2			81.5	133.6	220	
		3535	982.0			90.5	185.7		
	4242	1178.4	87.5	195.9					
	B	1967	546.4	79.5	109.2	200			
		3279	910.7	88.5	151.4				
		3934	1092.8	85.5	159.9				
		1825	506.9	77.5	89.5		160		
	3042	844.9	86.5	123.7					
	3650	1013.8	83.5	130.7					

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

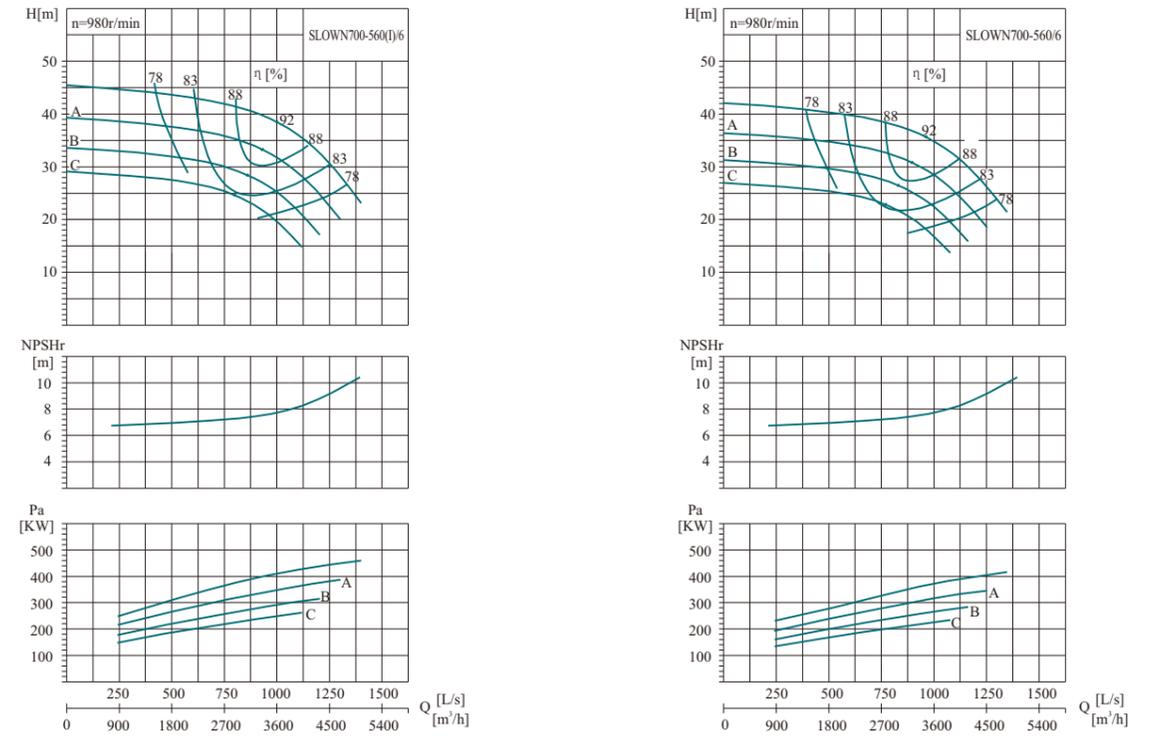


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN700-560(I)/6	A	2160	600.0	7.5	980	83	294.6	500	2550
		3600	1000.0			92	410.1		
		4320	1200.0			89	432.4		
		2009	558.0			81	242.8	400	
		3348	930.0			90	337.2		
		4018	1116.0			87	355.8		
	B	1858	516.0	79	196.8	315			
		3096	860.0	88	272.7				
		3715	1032.0	85	288.0				
	C	1728	480.0	77	162.6	280			
		2880	800.0	86	224.6				
		3456	960.0	83	237.4				
SLOWN700-560/6	A	2079	577.5	7.5	980	83	262.7	450	2550
		3465	962.5			92	365.7		
		4158	1155.0			89	385.6		
		1933	537.0			81	216.4	400	
		3222	895.0			90	300.5		
	3866	1074.0	87	317.1					
	B	1793	498.0	79	177.0	280			
		2988	830.0	88	245.2				
		3586	996.0	85	258.9				
		1663	462.0	77	145.0		250		
	2772	770.0	86	200.3					
	3326	924.0	83	211.7					

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

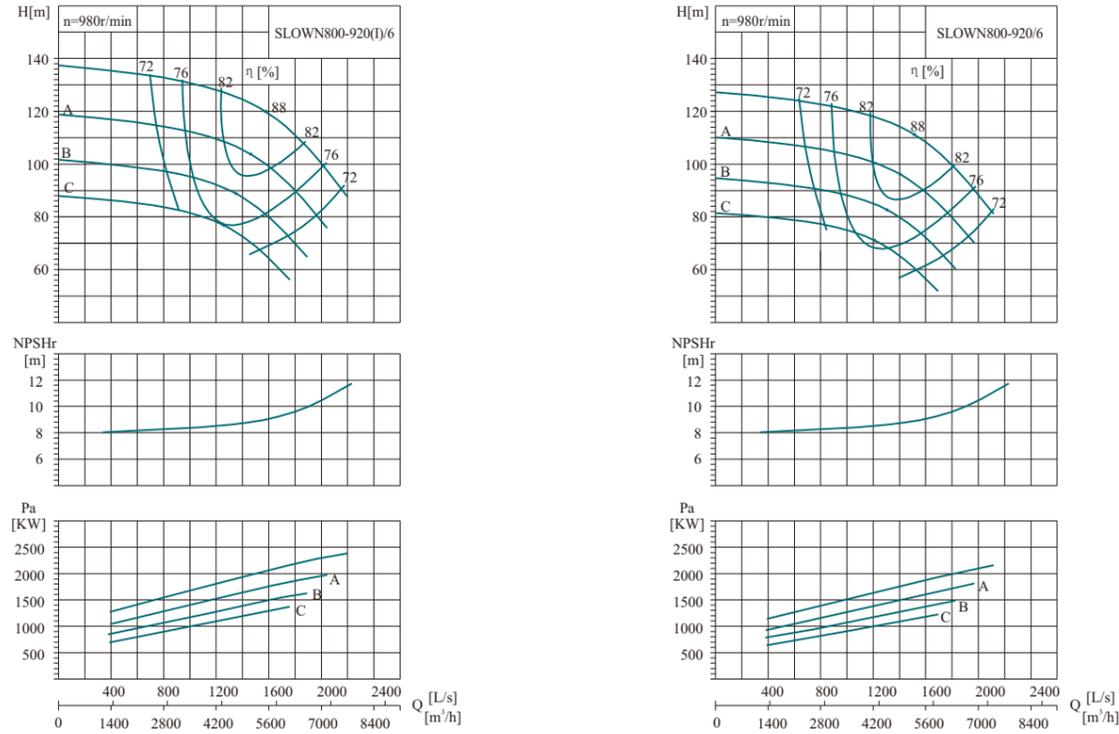


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN800-920(I)/6		3300	916.7	129.6	8.8	79	1473.7	2240	5600
		5500	1527.8	120.0		88	2041.7		
		6600	1833.3	102.0		85	2156.0		
	A	3069	852.5	112.1		77	1216.2	1800	
		5115	1420.8	103.8		86	1680.4		
		6138	1705.0	88.2		83	1776.0		
	B	2838	788.3	95.9		75	987.4	1600	
		4730	1313.9	88.8		84	1360.5		
		5676	1576.7	75.4		81	1439.1		
	C	2640	733.3	82.9		73	816.6	1250	
		4400	1222.2	76.8		82	1121.8		
		5280	1466.7	65.3		79	1187.7		
SLOWN800-920/6		3176	882.3	120.1	8.8	79	1314.1	2000	5600
		5294	1470.5	111.2		88	1820.5		
		6353	1764.6	94.5		85	1922.4		
	A	2954	820.4	103.8		77	1084.0	1600	
		4923	1367.4	96.1		86	1497.7		
		5907	1640.8	81.7		83	1582.9		
	B	2739	760.8	89.3		75	887.6	1400	
		4565	1268.1	82.7		84	1223.0		
		5478	1521.7	70.3		81	1293.7		
	C	2541	705.8	76.8		73	728.1	1120	
		4235	1176.4	71.1		82	1000.3		
		5082	1411.7	60.5		79	1059.0		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

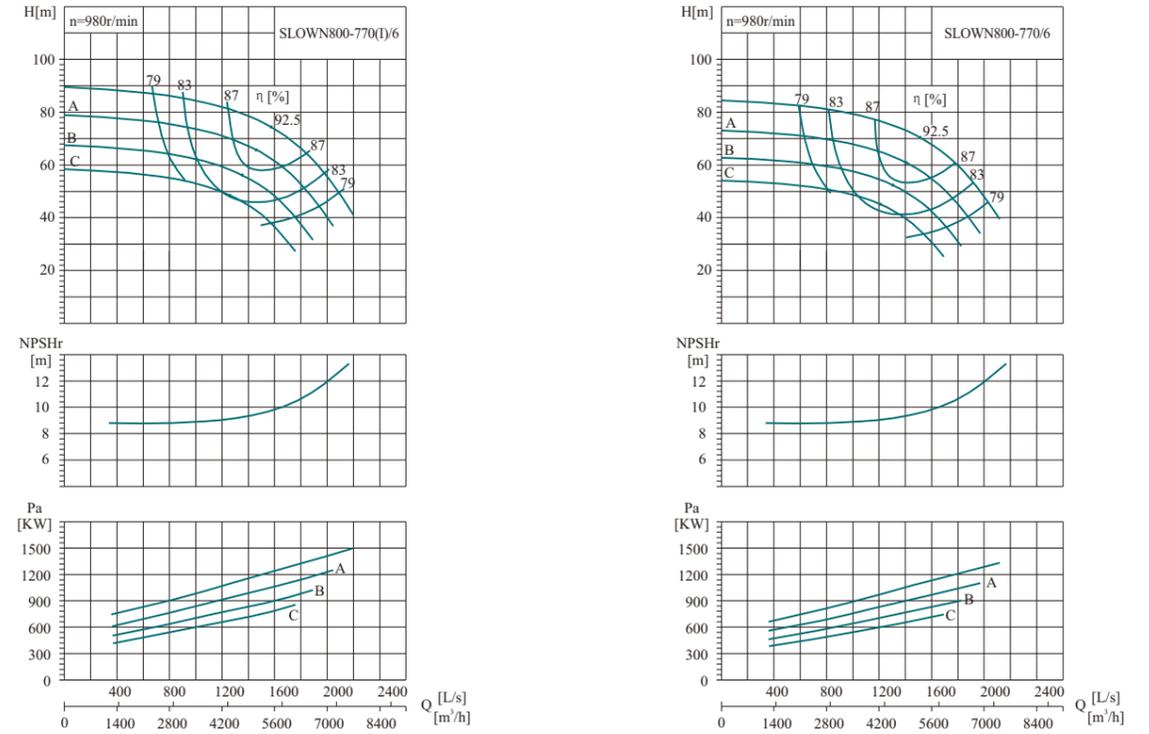


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r/min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN800-770(I)/6		3300	916.7	82.1	9.4	83.5	883.1	1400	4500
		5500	1527.8	76.0		92.5	1230.2		
		6600	1833.3	64.6		89.5	1296.8		
	A	3069	852.5	71.0		81.5	727.7	1120	
		5115	1420.8	65.7		90.5	1011.3		
		6138	1705.0	55.9		87.5	1066.9		
	B	2838	788.3	60.7		79.5	589.9	1000	
		4730	1313.9	56.2		88.5	817.8		
		5676	1576.7	47.8		85.5	863.4		
	C	2640	733.3	52.5		77.5	487.1	800	
		4400	1222.2	48.6		86.5	673.5		
		5280	1466.7	41.3		83.5	711.7		
SLOWN800-770/6		3176	882.3	76.0	9.4	83.5	787.4	1250	4500
		5294	1470.5	70.4		92.5	1096.9		
		6353	1764.6	59.8		89.5	1156.3		
	A	2954	820.4	65.7		81.5	648.6	1120	
		4923	1367.4	60.9		90.5	901.4		
		5907	1640.8	51.7		87.5	951.0		
	B	2739	760.8	56.5		79.5	530.3	900	
		4565	1268.1	52.4		88.5	735.2		
		5478	1521.7	44.5		85.5	776.2		
	C	2541	705.8	48.7		77.5	434.4	710	
		4235	1176.4	45.1		86.5	600.6		
		5082	1411.7	38.3		83.5	634.6		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

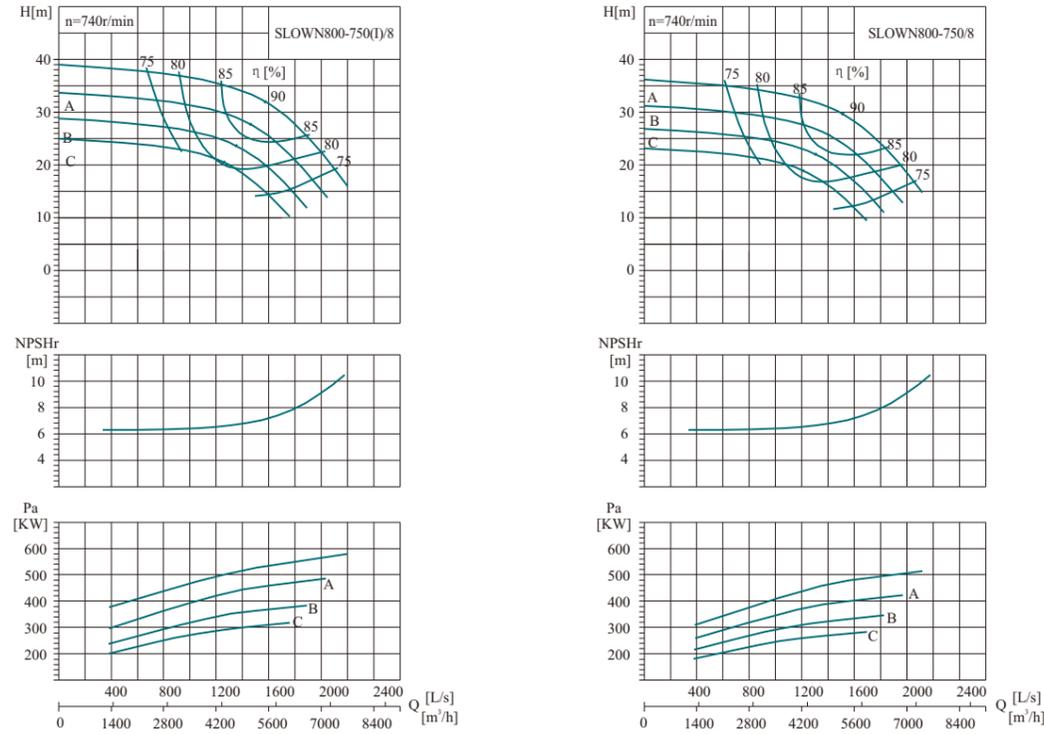


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)			
	(m³/h)	(L/s)										
SLOWN800-750(I)/8	A	3300	916.7	34.6	7	740	81	383.3	630	4450		
		5500	1527.8	32.0			90	532.3				
		6600	1833.3	27.2			87	561.7				
		3069	852.5	29.9			79	316.1			560	
		5115	1420.8	27.7			88	437.9				
		6138	1705.0	23.5			85	462.5				
	B	2838	788.3	25.6			77	256.5	450			
		4730	1313.9	23.7			86	354.4				
		5676	1576.7	20.1			83	374.5				
		C	2640	733.3			22.1	75			211.9	355
			4400	1222.2			20.5	84			292.0	
			5280	1466.7			17.4	81			308.9	
SLOWN800-750/8	A		3176	882.3	32.0	7	740	81	341.8	560	4450	
			5294	1470.5	29.6			90	474.7			
			6353	1764.6	25.2			87	500.9			
		2954	820.4	27.7	79			281.7	500			
		4923	1367.4	25.6	88			390.3				
		5907	1640.8	21.8	85			412.2				
	B	2739	760.8	23.8	77			230.5		400		
		4565	1268.1	22.0	86			318.5				
		5478	1521.7	18.7	83			336.7				
		C	2541	705.8	20.5			75	189.0			315
			4235	1176.4	19.0			84	260.4			
			5082	1411.7	16.1			81	275.4			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

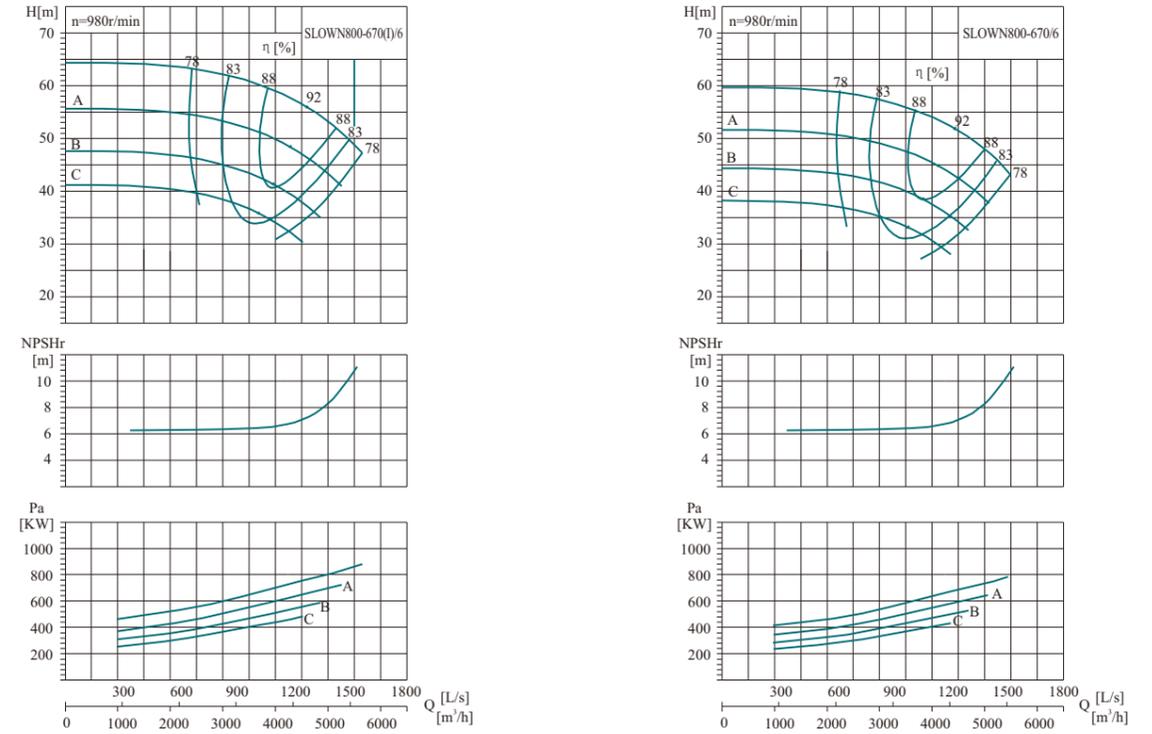


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)			
	(m³/h)	(L/s)										
SLOWN800-670(I)/6	A	2880	800.0	56.2	8.5	980	83	530.5	900	4200		
		4800	1333.3	52.0			92	738.6				
		5760	1600.0	44.2			89	778.7				
		2678	744.0	48.6			81	437.2			800	
		4464	1240.0	45.0			90	607.3				
		5357	1488.0	38.2			87	640.8				
	B	2477	688.0	41.5			79	354.5	630			
		4128	1146.7	38.5			88	491.1				
		4954	1376.0	32.7			85	518.6				
		C	2304	640.0			35.9	77			292.8	500
			3840	1066.7			33.3	86			404.5	
			4608	1280.0			28.3	83			427.5	
SLOWN800-670/6	A		2772	770.0	52.0	8.5	980	83	473.0	800	4200	
			4620	1283.3	48.2			92	658.5			
			5544	1540.0	40.9			89	694.4			
		2578	716.0	45.0	81			389.7	710			
		4296	1193.3	41.7	90			541.2				
		5155	1432.0	35.4	87			571.1				
	B	2390	664.0	38.7	79			318.7		560		
		3984	1106.7	35.8	88			441.5				
		4781	1328.0	30.4	85			466.2				
		C	2218	616.0	33.3			77	261.1			450
			3696	1026.7	30.8			86	360.7			
			4435	1232.0	26.2			83	381.2			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

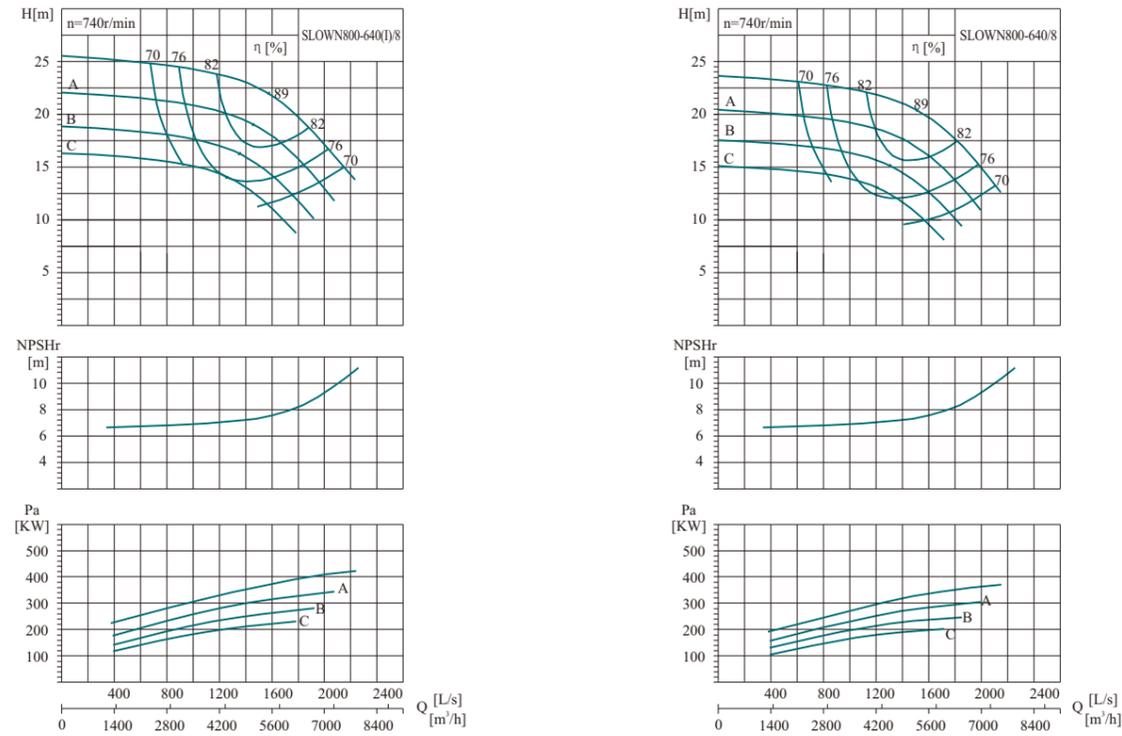


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN800-640(I)/8		3300	916.7	23.8	7.5	80	266.8	450	3800
		5500	1527.8	22.0		89	370.1		
		6600	1833.3	18.7		86	390.7		
	A	3069	852.5	20.6		78	220.1	355	
		5115	1420.8	19.0		87	304.5		
		6138	1705.0	16.2		84	321.7		
		2838	788.3	17.6		76	178.6		
		4730	1313.9	16.3		85	246.5		
		5676	1576.7	13.8		82	260.6		
	B	2640	733.3	15.2		74	147.7	315	
		4400	1222.2	14.1		83	203.2		
		5280	1466.7	12.0		80	215.0		
SLOWN800-640/8		3176	882.3	22.0	7.5	80	237.9	400	3800
		5294	1470.5	20.4		89	330.0		
		6353	1764.6	17.3		86	348.3		
	A	2954	820.4	19.0		78	196.2	315	
		4923	1367.4	17.6		87	271.4		
		5907	1640.8	15.0		84	286.7		
		2739	760.8	16.4		76	160.6		
		4565	1268.1	15.2		85	221.6		
		5478	1521.7	12.9		82	234.3		
	B	2541	705.8	14.1		74	131.7	280	
		4235	1176.4	13.0		83	181.2		
		5082	1411.7	11.1		80	191.7		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

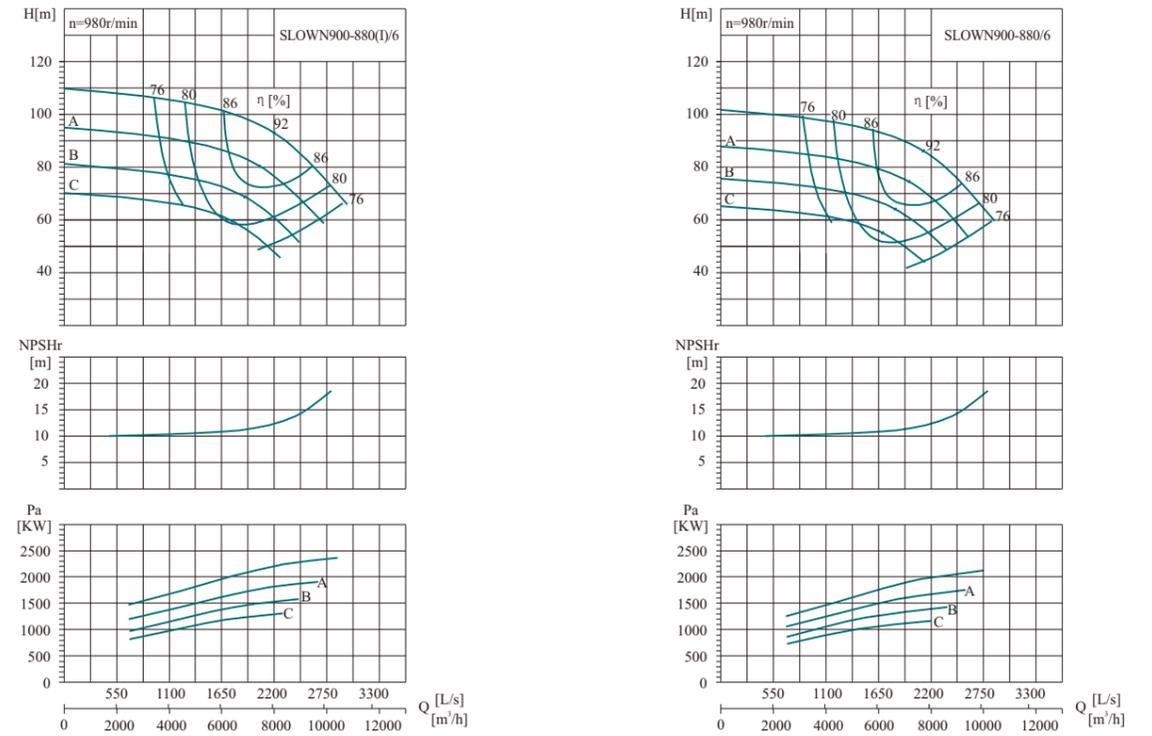


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN900-880(I)/6		4800	1333.3	100.4	10	83	1581.2	2500	6650
		8000	2222.2	93.0		92	2201.4		
		9600	2666.7	79.1		89	2321.2		
	A	4464	1240.0	86.9		81	1303.3	2000	
		7440	2066.7	80.4		90	1810.1		
		8928	2480.0	68.4		87	1910.0		
		4128	1146.7	74.3		79	1056.7		
		6880	1911.1	68.8		88	1463.9		
		8256	2293.3	58.5		85	1545.9		
	B	3840	1066.7	64.3		77	872.7	1800	
		6400	1777.8	59.5		86	1205.8		
		7680	2133.3	50.6		83	1274.3		
SLOWN900-880/6		4620	1283.3	93.0	10	83	1409.9	2240	6650
		7700	2138.9	86.2		92	1963.0		
		9240	2566.7	73.2		89	2069.7		
	A	4296	1193.3	80.5		81	1161.6	1800	
		7160	1988.9	74.5		90	1613.3		
		8592	2386.7	63.3		87	1702.3		
		3984	1106.7	69.2		79	949.9		
		6640	1844.4	64.1		88	1316.0		
		7968	2213.3	54.5		85	1389.7		
	B	3696	1026.7	59.6		77	778.1	1600	
		6160	1711.1	55.1		86	1075.2		
		7392	2053.3	46.9		83	1136.3		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

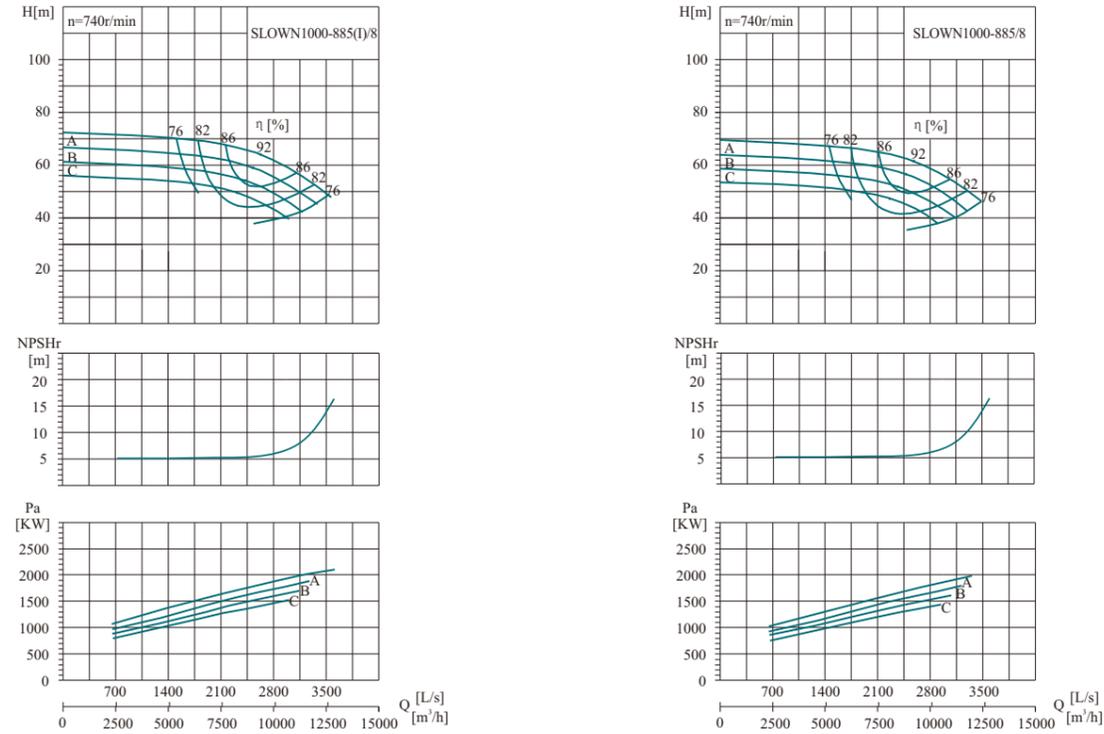


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN1000-885(I)/8	A	5640	1566.7	5.5	740	83	1278.6	2240	9500	
		9400	2611.1			92	1780.1			
		11280	3133.3			89	1876.9			
		5245	1457.0			81	1053.8			1800
		8742	2428.3			90	1463.7			
		10490	2914.0			87	1544.4			
	B	4850	1347.3			79	854.4	1400		
		8084	2245.6			88	1183.7			
		9701	2694.7			85	1250.0			
	C	4512	1253.3			77	705.6	1250		
		7520	2088.9			86	975.0			
		9024	2506.7			83	1030.4			
SLOWN1000-885/8	A	5429	1507.9	5.5	740	83	1140.1	1800	9500	
		9048	2513.2			92	1587.3			
		10857	3015.8			89	1673.6			
		5048	1402.2			81	939.3			1600
		8413	2336.9			90	1304.5			
		10096	2804.3			87	1376.5			
	B	4681	1300.3			79	768.1	1250		
		7802	2167.2			88	1064.1			
		9362	2600.7			85	1123.7			
	C	4343	1206.3			77	629.2	1120		
		7238	2010.6			86	869.4			
		8686	2412.7			83	918.8			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

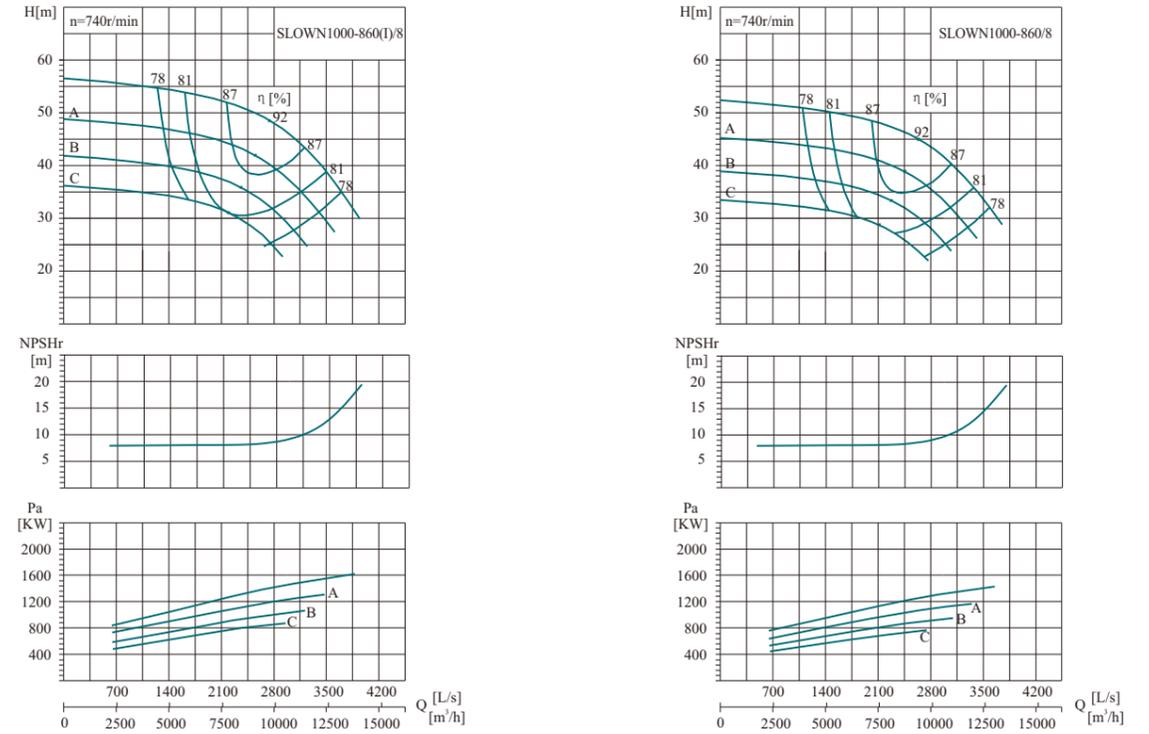


型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)	
	(m³/h)	(L/s)								
SLOWN1000-860(I)/8	A	5880	1633.3	8.5	740	83	1010.2	1600	8200	
		9800	2722.2			92	1406.4			
		11760	3266.7			89	1482.9			
		5468	1519.0			81	832.6			1400
		9114	2531.7			90	1156.4			
		10937	3038.0			87	1220.2			
	B	5057	1404.7			79	675.0	1120		
		8428	2341.1			88	935.2			
		10114	2809.3			85	987.6			
	C	4704	1306.7			77	557.5	900		
		7840	2177.8			86	770.3			
		9408	2613.3			83	814.1			
SLOWN1000-860/8	A	5660	1572.1	8.5	740	83	900.7	1400	8200	
		9433	2620.1			92	1254.0			
		11319	3144.2			89	1322.2			
		5263	1461.8			81	742.1			1250
		8771	2436.4			90	1030.7			
		10525	2923.7			87	1087.5			
	B	4880	1355.7			79	606.8	1000		
		8134	2259.4			88	840.7			
		9761	2711.3			85	887.8			
	C	4528	1257.7			77	497.1	800		
		7546	2096.1			86	686.9			
		9055	2515.3			83	725.9			

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

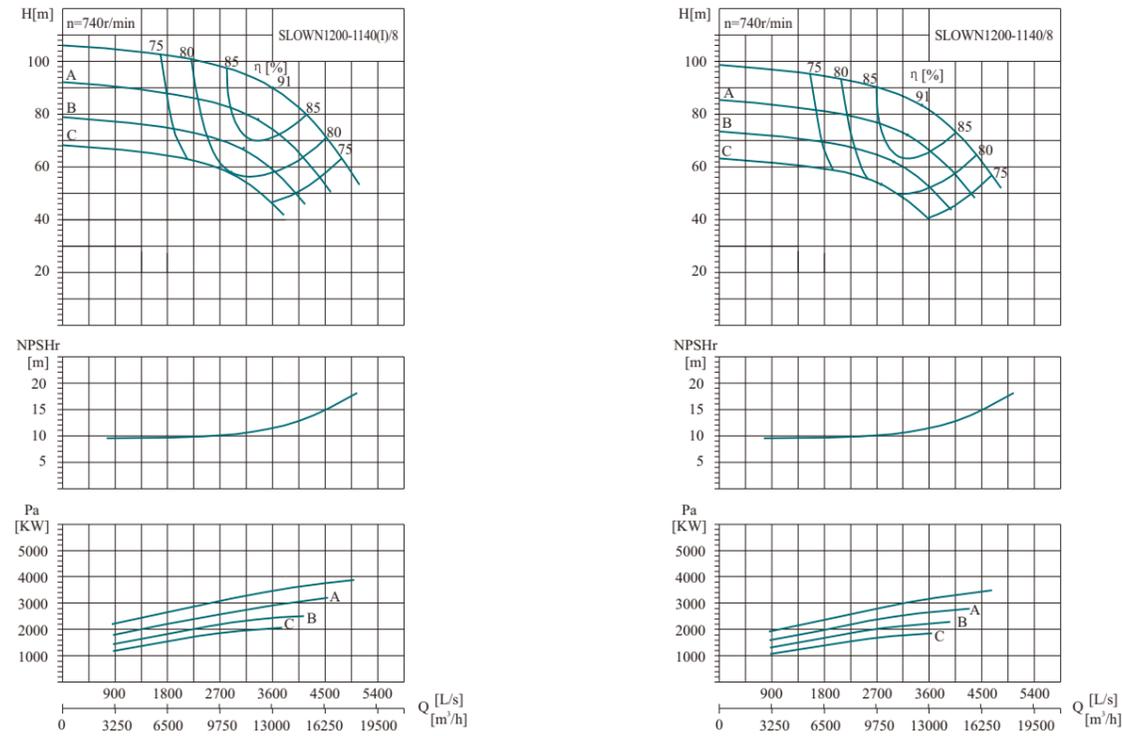

型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN1200-1140(I)/8		7800	2166.7	97.2	740	82	2516.9	4000	12300
		13000	3611.1	90.0		91	3500.0		
		15600	4333.3	76.5		88	3691.7		
	A	7254	2015.0	84.1		80	2075.1	3550	
		12090	3358.3	77.8		89	2878.5		
		14508	4030.0	66.2		86	3038.5		
	B	6708	1863.3	71.9		78	1683.0	2800	
		11180	3105.6	66.6		87	2328.5		
		13416	3726.7	56.6		84	2459.9		
	C	6240	1733.3	62.2		76	1390.4	2240	
		10400	2888.9	57.6		85	1918.5		
		12480	3466.7	49.0		82	2028.5		
SLOWN1200-1140/8		7508	2085.4	90.0	740	82	2244.3	3550	12300
		12513	3475.7	83.4		91	3120.8		
		15015	4170.8	70.9		88	3291.8		
	A	6981	1939.2	77.9		80	1849.5	3150	
		11635	3231.9	72.1		89	2565.6		
		13962	3878.3	61.3		86	2708.2		
	B	6474	1798.3	67.0		78	1512.9	2500	
		10790	2997.2	62.0		87	2093.3		
		12948	3596.7	52.7		84	2211.4		
	C	6006	1668.3	57.6		76	1239.8	2000	
		10010	2780.6	53.4		85	1710.7		
		12012	3336.7	45.4		82	1808.7		

## SLOWN系列泵性能曲线、参数表 Performance curve, parameter table

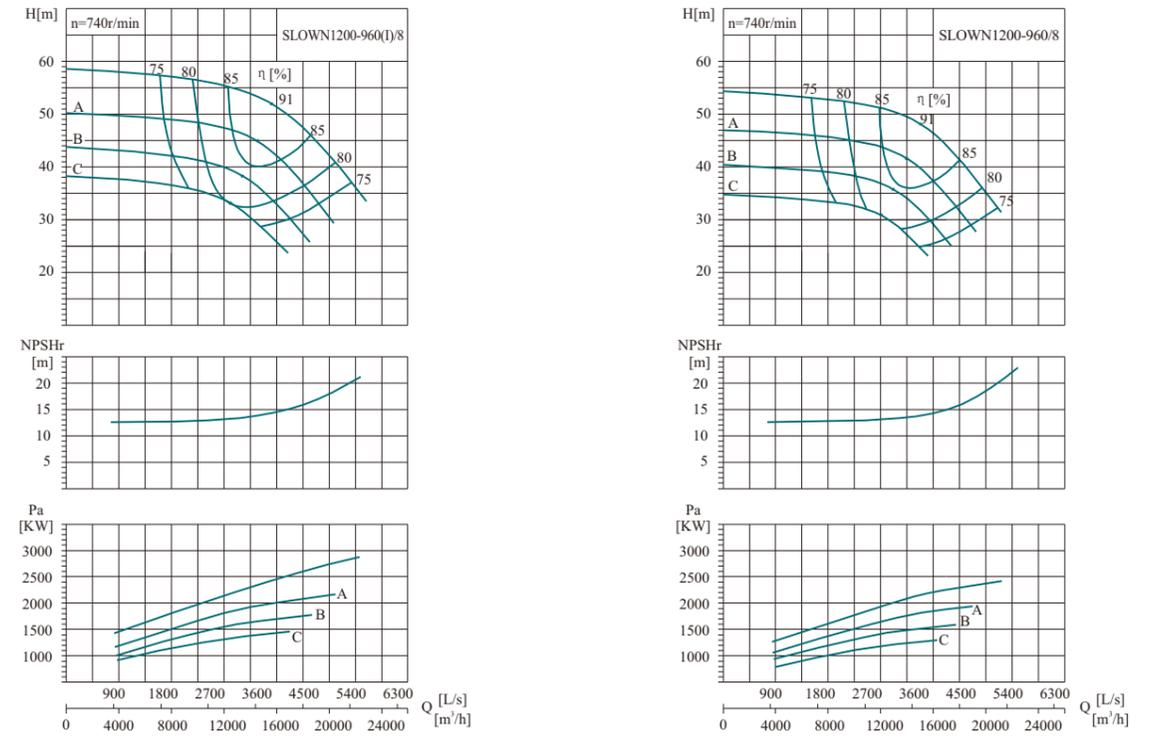

型号 Model	流量 Flow		扬程 Head (m)	汽蚀余量 Cavitation (NPSHr/m)	转速 Speed (r / min)	效率 Eff. (%)	轴功率 Shaft power (KW)	功率 Power (KW)	泵净重 Pump weight (KG)
	(m³/h)	(L/s)							
SLOWN1200-960(I)/8		9360	2600.0	56.2	740	82	1745.1	2800	10400
		15600	4333.3	52.0		91	2426.7		
		18720	5200.0	44.2		88	2559.6		
	A	8705	2418.0	48.6		80	1438.8	2240	
		14508	4030.0	45.0		89	1995.8		
		17410	4836.0	38.2		86	2106.7		
	B	8050	2236.0	41.5		78	1166.9	1800	
		13416	3726.7	38.5		87	1614.5		
		16099	4472.0	32.7		84	1705.6		
	C	7488	2080.0	35.9		76	964.0	1600	
		12480	3466.7	33.3		85	1330.2		
		14976	4160.0	28.3		82	1406.4		
SLOWN1200-960/8		9009	2502.5	52.0	740	82	1556.0	2500	10400
		15015	4170.8	48.2		91	2163.8		
		18018	5005.0	40.9		88	2282.3		
	A	8377	2327.0	45.0		80	1282.3	2000	
		13962	3878.3	41.7		89	1778.8		
		16754	4654.0	35.4		86	1877.7		
	B	7769	2158.0	38.7		78	1049.0	1600	
		12948	3596.7	35.8		87	1451.3		
		15538	4316.0	30.4		84	1533.2		
	C	7207	2002.0	33.3		76	859.6	1400	
		12012	3336.7	30.8		85	1186.1		
		14414	4004.0	26.2		82	1254.0		



## 订货须知 Ordering instructions

### 1、必须提供的订货参数：

- 泵型号及用户所需工况点流量、扬程（包括系统损失）、汽蚀余量参数。
- 轴封形式（机械密封或填料密封必须注明，不注明则按机械密封结构交货）。
- 泵的旋转方向（若采用逆时针旋向安装，必须注明，不注明则按顺时针旋向交货）。
- 电机参数（功率为<200kW的低压电机，一般配用IP44的Y系列电机，当配高压电机时，须注明电机的厂家、电压、防护等级、绝缘等级、冷却方式、功率、极数）。
- 泵壳、叶轮、轴等零件材料（若不注明按标准配置交货）。
- 介质温度（不注明则按常温介质交货）。
- 若输送介质是腐蚀性介质或含有固体颗粒时，请提供其特性。

### 2、选型说明：

- 用户订货不受样本性能参数所列限制，仅供用户选型参考，可根据用户实际所需流量扬程工作点提供产品。

3、有超越样本内容的特殊选型，请与上海连成（集团）技术支持联系。

4、若配用高压或特殊电机时，请以上海连成总部提供的图纸为准。

### 5、正常供货范围：

泵头(不带联轴器)，填料密封或机械密封。

### 6、另收费项目：

- 卧式泵和电机的公共底座
- 电机成套供应
- 反法兰片（含垫圈、螺母、螺柱、法兰垫）
- 材料试验
- 联轴器和联轴器防护罩
- 真空表、压力表
- 轴承测温装置(PT100)
- 排气阀(分：手动和自动)（含：接头）
- 旋风分离器组件(1套含：旋风分离器、流量计、球阀、接头及管路)
- Y型过滤器组件(1套含：Y型过滤器、流量计、球阀、接头及管路)
- 热交换器及组件(1套含：热交换器、流量计、球阀、接头及管路)
- 测振组件(1套含：振动速度传感器4个/泵、振动监控仪2/泵)
- 测转速组件(1套含：测转速传感器、支架、紧固螺母、引线插件、信号引出线各2个/泵、转速监控模块仪表箱2/泵)

### 1. Must provide order parameters:

- Pump model and the user required operating point flow, head (including system loss), the amount of NPSH parameters.
- Shaft seal form (mechanical seal or packing seal must be noted, do not specify the mechanical seal structure delivery).
- The direction of rotation of the pump (if counterclockwise to install, must be noted, do not specify the clockwise rotation to delivery).
- Motor parameters (power <200kW low-voltage motor, generally equipped with IP44 Y series motor, when equipped with high-voltage motor, must specify the motor manufacturers, voltage, protection class, insulation class, cooling mode, power, the number of poles).
- Pump housing, impeller, shaft and other parts materials (if not specified by standard delivery).
- Medium temperature (not specified by the temperature of the media delivery).
- If the conveying medium is corrosive or containing solid particles, please provide its characteristics.

### 2. Selection Description:

- User orders are not limited by the sample performance parameters, only for user selection reference, according to the actual needs of the user flow head to provide products.

3. Please contact Shanghai Liancheng (Group) technical support for special selection beyond the contents of the sample.

4. If equipped with high voltage or special motor, please use the drawings provided by Shanghai as a headquarters.

### 5. Normal supply scope:

Pump head (without coupling), packing seal or mechanical seal.

### 6. Additional charges:

- Common base for horizontal pumps and motors
- Complete set supply for motors
- Counterflange (including washer, nut, stud and flange gasket)
- Material test
- Coupling and coupling guard
- Vacuum gauge, pressure gauge
- Bearing temperature measuring device (PT100)
- Exhaust valve (sub: manual and automatic) (including: connector)
- Cyclone separator components (1 set includes: cyclone separator, flow meter, ball valve, joint and pipeline)
- Y-type filter assembly (1 set includes: y-type filter, flow meter, ball valve, joint and pipeline)
- Heat exchanger and components (1 set including: heat exchanger, flow meter, ball valve, joint and pipeline)
- Vibration measurement components (1 set includes: vibration speed sensor 4 / pump, vibration monitor 2/ pump)
- Speed measurement module (1 set includes: speed measurement sensor, support, fastening nut, lead plug, two signal leads/pumps each, speed monitoring module instrument box 2/ pump)