




# SLS新系列单级单吸立式离心泵 (2019版)

## SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

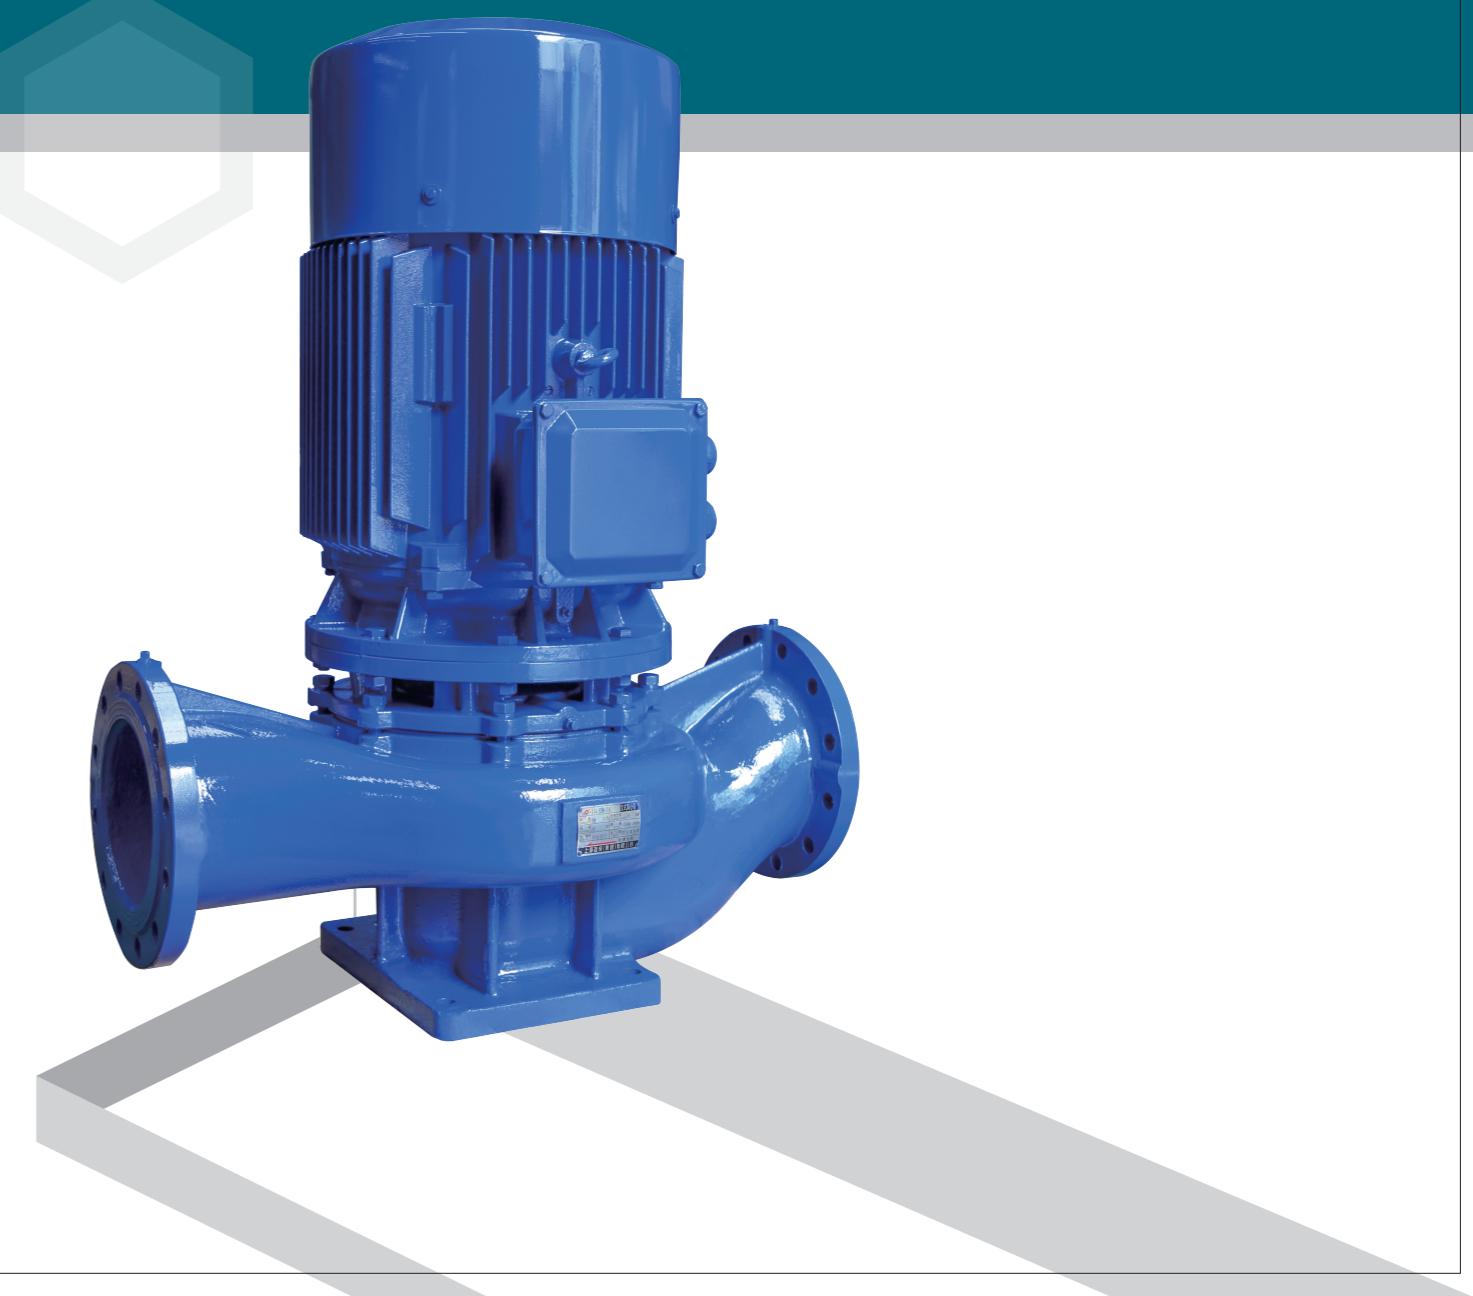

上海连成（集团）有限公司  
SHANGHAI LIANCHENG (GROUP)CO.,LTD.

地址：上海市江桥镇曹安公路3616-3618号  
邮编：201812  
总机：(021) 59138888  
传真：(021) 59136782  
800免费咨询电话：800-820-5009  
400免费咨询电话：400-188-3339

Address: 3616-3618 Can'an Road, Jiangqiao Shanghai  
P.C.: 201812  
Switchboard: (021) 59138888  
Fax: (021) 59136782  
800 Free consultation Tel: 800-820-5009  
400 Free consultation Tel: 400-188-3339



连成集团微信订阅号

# 目 录

## CONTENTS

---

|   |    |
|---|----|
| <b>产品概述、产品特点</b><br>Outline of the product, Product features  | 1  |
| <b>主要用途、压力试验</b><br>Chief usage, Pressure test  | 2  |
| <b>工作条件、型号意义</b><br>Working conditions, Model meaning   | 3  |
| <b>结构特征</b><br>Structural features  | 4  |
| <b>SLS(SLSD)型泵结构图</b><br>The configuration of SLS(SLSD) type pump   | 4  |
| <b>泵材质、订货须知</b><br>The pump material, Ordering instructions   | 5  |
| <b>SLS(SLSD)型谱图</b><br>The configuration of SLS(SLSD) atlas of style  | 5  |
| <b>SLS(SLSD)型泵性能参数</b><br>SLS(SLSD) type pump performance data  | 7  |
| <b>SLS(SLSD)型泵安装尺寸图、尺寸表</b><br>SLS(SLSD) type pump dimension figure, dimension table                          | 15 |
| <b>泵附件及安装基础图表</b><br>Pump spare parts and installation basic figure table                                     | 23 |
| <b>SLS型泵无隔振安装基础图、尺寸表</b><br>Installation basic drawing and table of dimension for SLS type pump non-isolation | 24 |
| <b>泵的安装方式</b><br>Installation methods for pump  | 25 |
| <b>管路损耗参考表</b><br>Reference table for pipeline loss   | 26 |

### 产品概述 Outline of the product

SLS新系列单级单吸立式离心泵，是本公司采用现代最优秀的水力模型，严格按照国际标准ISO 2858和最新国家标准GB 19726-2007《清水离心泵能效限定值及节能评价值》设计制造的新颖产品，是替代IS型卧式泵、DL型泵等常规产品的新颖立式离心泵。

分基本型、扩流型、A、B、C切割型等250多种规格。根据流体介质和温度不同，设计制造成同性能参数的SLR型热水泵、SLH型化工泵、SLY型油泵和SLHY型立式防爆化工泵系列产品。

### 产品特点 Product features

1、泵结构紧凑、体积小、外形美观。其立式结构重心较低且重心重合于泵脚中心，增强了泵的运行稳定性和寿命。

2、安装方便。进出口径相同并在同一中心线上，可像阀门一样直接安装在管路任何部位。电机加上防雨罩可置于户外使用。泵设有安装底脚，以使泵的安装稳定。

3、运行平稳、噪音低、组件同心度高。电机采用低噪音轴承，并设有不停机加油装置，泵叶轮具有极好的动静平衡，运行无振动，改善了使用环境。

4、无渗漏。轴封采用耐腐硬质合金机械密封，解决了离心泵填料严重渗漏问题，延长了使用寿命，确保了运行场地干净整洁。

5、维修方便。勿需拆卸管道，只要拆下泵盖螺母，取出电机及传动组件即可进行检修维护。

6、可根据现场使用条件，泵机可立式、卧式、多方式安装，依据流量扬程要求，采用并、串联方式，增加所需流量扬程。

SLS new series single-stage single-suction vertical centrifugal pump, the company adopts the modern most excellent hydraulic model, in strict accordance with international standards ISO 2858 and the latest national standard GB 19726-2007 centrifugal pump the water limit values of energy efficiency and energy conservation value, the design and manufacture of new products, alternative IS horizontal pump, DL is novel vertical centrifugal pump of pump such as conventional products.

There are basic type, by-pass type, A, B, C cutting type etc. more than 250 specifications. And per the different flow medium and temperature, SLR hot-water pump, SLH chemical pump and SLY oil pump and SLHY vertical non-explosive chemical pump. etc. series products. of the same type and same property data have been designed and made.

1. Pump compact structure, small volume, beautiful appearance. Its vertical center of gravity is lower and the center of gravity coincides with the center of pump foot, which enhances the running stability and service life of the pump.

2. Easy installation. The inlet and outlet diameters are the same and on the same center line, which can be directly installed in any part of the pipeline like a valve. The motor with rain cover can be used outdoors. The pump is provided with an installation foot to make the installation of the pump stable.

3. Stable operation, low noise and high concentricity of components. The motor adopts low noise bearing, and is equipped with non-stop refueling device, pump impeller has excellent dynamic and static balance, no vibration, improve the operating environment.

4. No leakage. The shaft seal adopts anticorrosive hard alloy mechanical seal, which solves the problem of serious leakage of centrifugal pump packing, prolonging the service life and ensuring the operation site is clean and tidy.

5. Convenient maintenance. Do not need to remove the pipe, just remove the pump cover nut, remove the motor and transmission components for maintenance.

6. The pump can be installed in vertical, horizontal and multi-mode according to the field operating conditions. The pump can be installed in parallel or series mode to increase the required flow head according to the requirements of flow head.

### 主要用途 Chief usage

1、SLS型立式离心泵，供输送清水及物理性质类似清水的其他液体之用。使用介质温度80℃以下。适用于工业和城市给排水、高层建筑增压送水、园林喷灌、消防增压、远距离输水、采暖、浴室冷暖水循环增压及设备配套等。

2、SLR型立式热水泵，适用于有供热系统的民用及企业事业单位的建筑住房供暖及热水增压、循环、输送等生产工艺供热系统，如电站、热电站、余热利用、冶金、化工、防止、木材加工、造纸等工业锅炉高温热水，使用温度100℃以下。

3、SLH型立式化工泵，输送不含固体颗粒具有腐蚀性其粘度类似水的液体。适用于轻纺、室友、化工、冶金、电力、造纸、食品、制药和合成纤维等部门。使用温度-20℃~100℃。

4、SLY型立式防爆油泵，适用于石油、轻纺、化工、机械等行业输送无腐蚀、易燃、易爆液体，被输送介质温度-20℃~100℃。

介质密度 $\rho < 1000 \text{Kg/m}^3$ 。

5、SLHY型式防爆化工泵输送不含固体颗粒具有腐蚀性其粘度类似水且易燃易爆的液体。适用于石油、轻纺、化工、冶金、矿山、制药和合成纤维等部门，使用温度-20℃~100℃。

1. SLS type vertical centrifugal pump is used for transporting clean water and other liquids with physical properties similar to clean water. Medium temperature is below 80 °C . It is suitable for industrial and urban water supply and drainage, supercharging water supply in high-rise buildings, sprinkling irrigation in gardens, supercharging fire fighting, long-distance water supply, heating, supercharging water circulation in bathrooms and supporting equipment.

2. SLR type vertical hot water pump, suitable for a heating system of enterprises and institutions in civil and building housing heating and hot water pressurization, circulation, production process, such as power plant, thermal power plants, waste heat utilization, metallurgy, chemical industry, prevent, wood processing, paper and other industrial boiler high temperature hot water, using temperature below 100 °C.

3. SLH type vertical chemical pump, transport does not contain solid particles with corrosive viscosity similar to water liquid. Suitable for light textile, roommate, chemical industry, metallurgy, electric power, paper making, food, pharmaceutical and synthetic fiber sectors. Operating temperature: -20°C~100°C.

4. SLY type vertical explosion-proof oil pump, suitable for oil, textile, chemical, machinery and other industries to transport non-corrosive, flammable, explosive liquid, medium temperature -20°C~100°C.

$P$  is  $p < 1000 \text{Kg/m}^3$ .

5. SLHY type explosion-proof chemical pump transport does not contain solid particles with corrosive viscosity similar to water and flammable explosive liquid. Suitable for petroleum, light textile, chemical industry, metallurgy, mining, pharmaceutical and synthetic fiber and other sectors, using temperature -20°C~100°C.

### 压力试验 Pressure test

| 设计压力（泵扬程）<br>Design pressure (pump head) | 测试压力<br>The test pressure        | 承压零件材质<br>Material of pressure bearing parts |
|--|----------------------------------|--|
| ≤0.8MPa                                  | (0.2+设计压力 Design pressure) × 1.3 | 灰铁 Grey iron (HT200)                         |
| >0.8MPa                                  | 设计压力 Design pressure × 1.3       | 灰铁 Grey iron (HT200)                         |


做整机静压力测试，持续5min，不得有渗漏、冒汗等现象。

Do static pressure test for the whole machine for 5min, no leakage, sweat and other phenomena.

## 工作条件 Working conditions

- 1、转速: 2950r/min、1480r/min、980r/min  
电压: 380V  
口径: 15~500mm  
流量范围: 1.5~2400m³/h  
扬程范围: 4.5~160m  
介质温度: -10°C~80°C
- 2、泵最大工作压力(最大允许进口压力+泵设计压力) < 1.6MPa, 订货请注明系统工作压力; 最大允许进口压力0.4 MPa;
- 3、适应介质: 清水介质、无腐蚀性液体。介质固体不溶物, 其体积不超过单位体积的0.1%, 粒度<0.2mm, 如介质为带有细小颗粒的请在订货时说明;
- 4、周围环境温度不超过40°C; 相对湿度不超过95%; 海拔高度小于1000m。
- 5、泵进、出口法兰尺寸相同, 可选配PN16-GB/T 9119-2010配对法兰。
- 6、必须汽蚀余量值是设计点值, 实际使用应加0.5m的安全裕量。
- 7、相关使用条件不符合样本的选型时须同公司技术部门联系。

## 型号意义 Model meaning

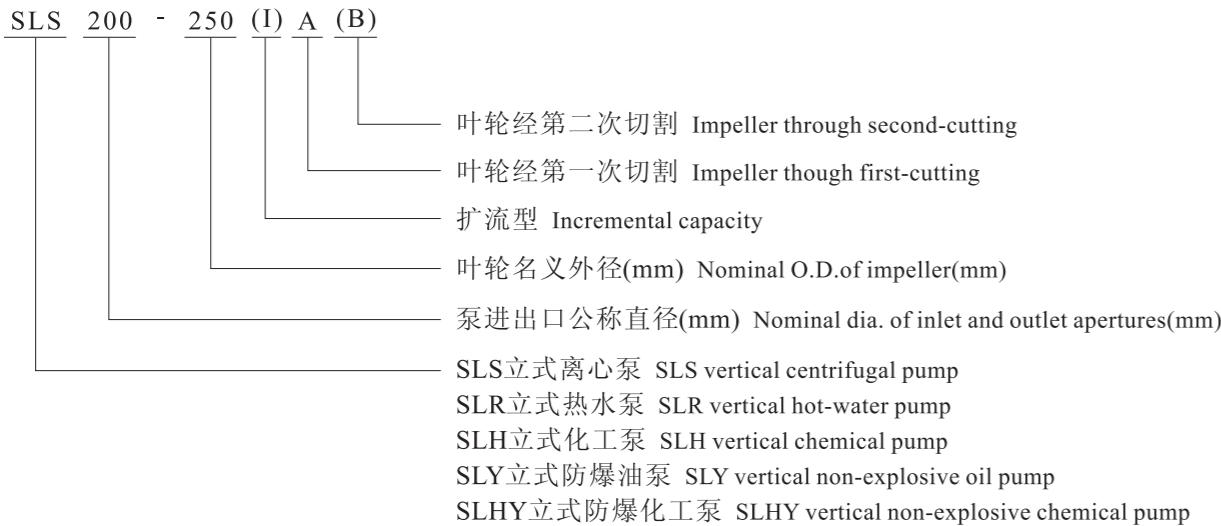

## 结构特征 Structural features

泵为单级单吸离心泵, 安装形式为立式。

### -- 泵壳

管路连接形式的螺旋形蜗壳, 采用现代优秀水力模型设计制造, 进出口在同一直线上, 且口径相同。法兰符合GB/T 17241. 6-2008并可选配Rp1/4或Rp3/8测压口。

### -- 叶轮

闭式叶轮, 优秀的水力模型保证泵的效率和可靠性, 部分改进型号泵的功率较上一代下降一档。

### -- 电机

采用YE3系列超高效三相异步电动机, 功率和形式符合IEC-Norm。

形式: V1(立式泵)

电源: 380V, 50HZ

防护等级: F

电机轴: 45#钢镶套 (连成专利)

转向: 从电机风扇端向下看为顺时针旋转。

The pump is a single-stage single-suction centrifugal pump, and the installation form is vertical.

### -- The pump casing

Spiral volute with pipe connection is designed and manufactured by modern excellent hydraulic model. The inlet and outlet are on the same line with the same caliber. Flange conforms to GB/T 17241.6-2008 and can be equipped with Rp1/4 or Rp3/8 pressure port.

### -- The impeller

Closed impeller, excellent hydraulic model to ensure the efficiency and reliability of the pump, some improved pump power than the previous generation down a gear.

### -- Motor

YE3 series super-efficient three-phase asynchronous motor is adopted, whose power and form are in conformity with IEC Norm.

Form: V1(vertical pump)


Power supply: 380V, 50HZ

Protection level: F

Motor shaft: 45# steel sleeve (continuous patent)

Turning: clockwise from the fan end of the motor.

## SLS(SLSD)型泵结构图 The configuration of SLS(SLSD) type pump

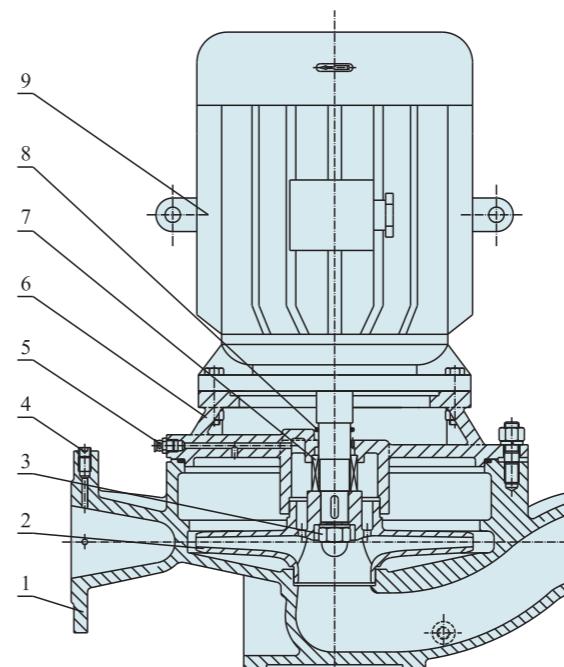

| 序号 No. | 名称 Name                 | 数量 Quantity |
|--------|-------------------------|-------------|
| 1      | 泵体 Pump casing          | 1           |
| 2      | 叶轮 Impeller             | 1           |
| 3      | 叶轮螺母 Impeller nut       | 1           |
| 4      | 螺塞 Plug                 | 1           |
| 5      | 放气阀 Air discharge valve | 1           |
| 6      | 泵盖 Pump cover           | 1           |
| 7      | 机械密封 Mechanical seal    | 1           |
| 8      | 挡水圈 Water-blocking ring | 1           |
| 9      | 电机 Motor                | 1           |

## 泵材质 The pump material

泵体——铸铁 (HT200)  
 泵盖——铸铁 (HT200)  
 叶轮——铸铁 (HT200)  
 泵轴——45#钢镶套 (连成专利)  
 机封——石墨、碳化硅  
 注：上述材质为常规配置，相关材质可按客户要求予以变更。

Pump body -- cast iron (HT200)  
 Pump cover -- cast iron (HT200)  
 Impeller -- cast iron (HT200)  
 Pump shaft -- 45# steel sleeve (continuous patent)  
 Machine seal -- graphite, silicon carbide  
 Note: the above materials are conventional configuration, related materials can be changed according to customer requirements.


## 订货须知 Ordering instructions

- 1、输送特殊液体时，请在合同中注明液体名称，温度、密度、浓度、粘性等；
- 2、对流量、扬程、进口压力，电机电压、频率、防爆等有特殊要求时，均需在合同签订前同技术部门沟通确认，并在合同中注明。

1. Please indicate the name of the liquid, temperature, density, concentration, viscosity, etc. in the contract when transporting special liquid;



2. Special requirements for flow rate, head, inlet pressure, motor voltage, frequency, explosion proof, etc. communicate and confirm with technical department before signing the contract, and indicate in the contract.

## SLS型谱图 SLS atlas of style

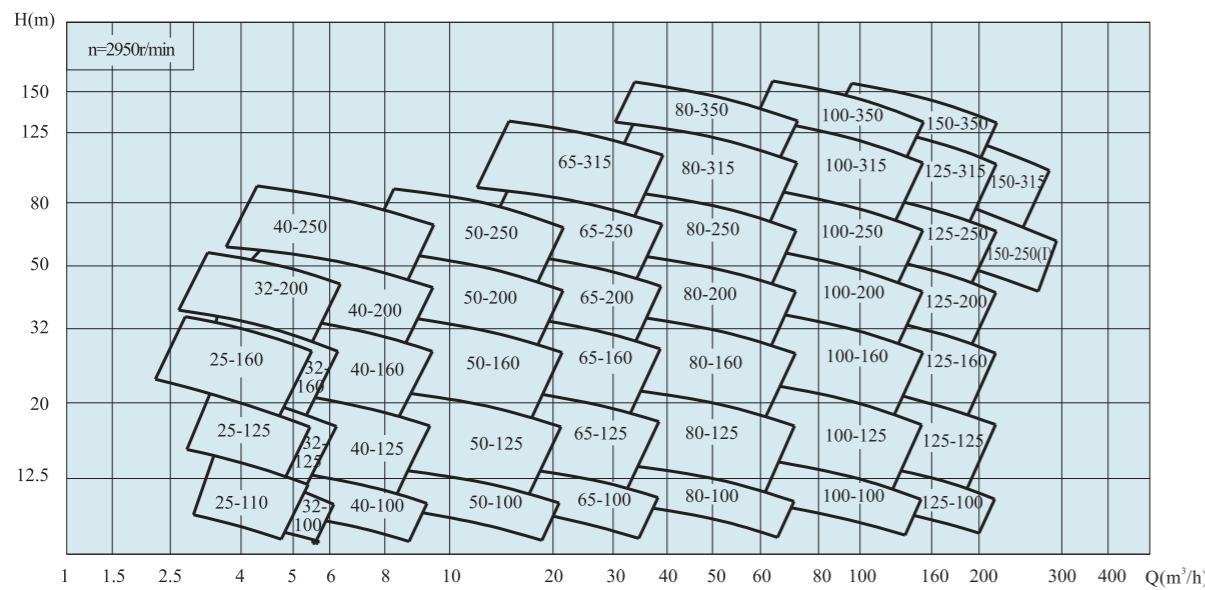


## SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

## SLS型谱图 SLS atlas of style

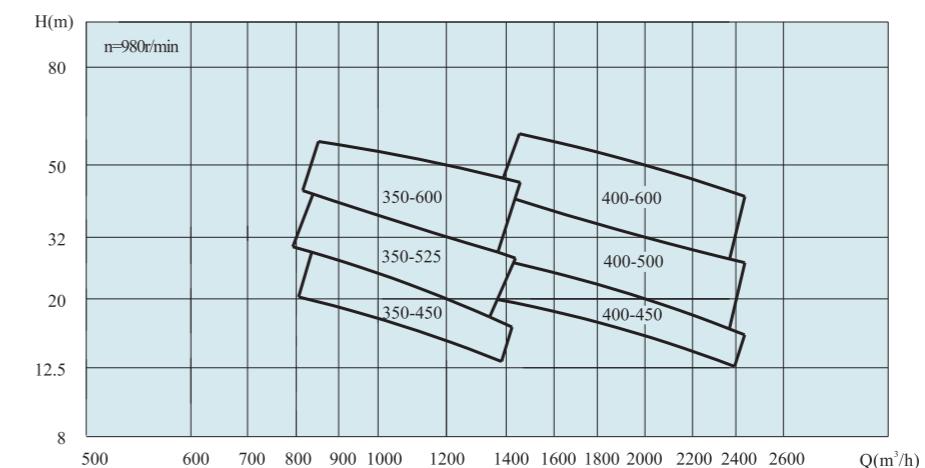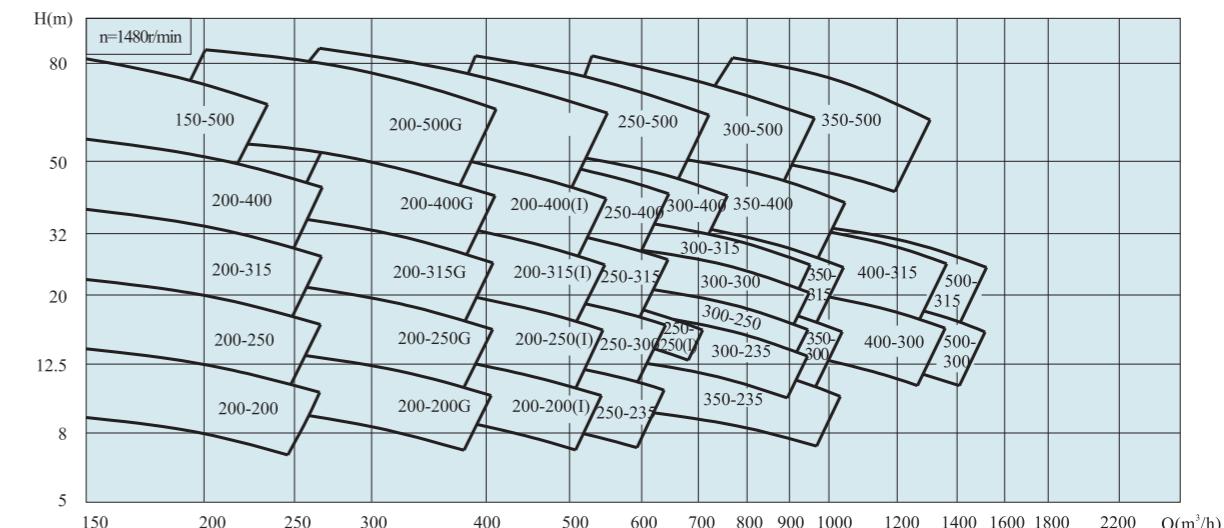

## SLSD型谱图 SLSD atlas of style

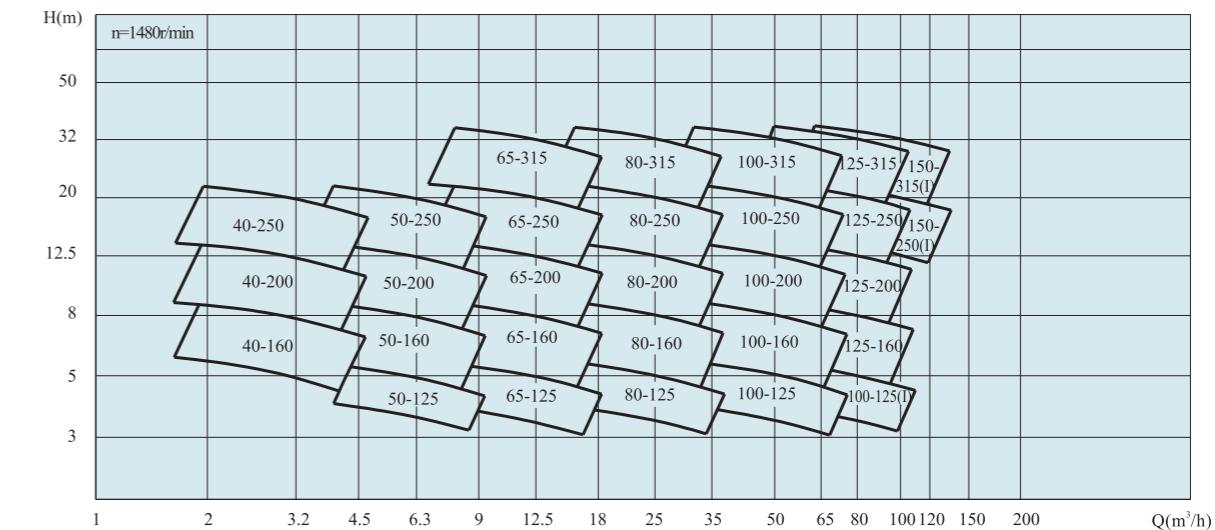

## SLS型泵性能参数 SLS type pump performance data

| 型号<br>Type | 流量<br>Capacity    |                      | 扬程<br>Head<br>(m)    | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|------------|-------------------|----------------------|----------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|            | (m³/h)            | (L/s)                |                      |                           |                        |                   |                             |                      |
| SLS15-80   | 1.1<br>1.5<br>2   | 0.3<br>0.42<br>0.56  | 8.5<br>8<br>7        | 0.18                      | 2950                   | 33.6              | 2.3                         | 9                    |
| SLS20-110  | 1.8<br>2.5<br>3   | 0.5<br>0.69<br>0.83  | 16<br>15<br>13.5     | 0.37                      | 2950                   | 24.5              | 2.3                         | 16                   |
| SLS20-125  | 1.8<br>2.5<br>3.3 | 0.5<br>0.69<br>0.91  | 21<br>20<br>18.6     | 0.75                      | 2950                   | 29.2              | 2.3                         | 26                   |
| SLS20-160  | 1.8<br>2.5<br>3   | 0.5<br>0.69<br>0.83  | 33<br>32<br>30       | 1.1                       | 2950                   | 24.9              | 2.3                         | 31                   |
| SLS25-110  | 2.8<br>4<br>4.8   | 0.78<br>1.11<br>1.33 | 16<br>15<br>13.5     | 0.55                      | 2950                   | 39                | 2.3                         | 18                   |
| SLS25-125  | 2.8<br>4<br>4.8   | 0.78<br>1.11<br>1.33 | 20.6<br>20<br>18     | 0.75                      | 2950                   | 40                | 2.3                         | 28                   |
| SLS25-125A | 2.5<br>3.6<br>4.3 | 0.69<br>1<br>1.19    | 17<br>16<br>14.4     | 0.55                      | 2950                   | 39                | 2.3                         | 27                   |
| SLS25-160  | 2.8<br>4<br>4.8   | 0.78<br>1.11<br>1.33 | 33<br>32<br>30       | 1.5                       | 2950                   | 31                | 2.3                         | 40                   |
| SLS25-160A | 2.6<br>3.7<br>4.4 | 0.72<br>1.03<br>1.22 | 29<br>28<br>26       | 1.1                       | 2950                   | 30                | 2.3                         | 30                   |
| SLS32-100  | 3.5<br>4.5<br>5.3 | 0.97<br>1.25<br>1.47 | 14.5<br>12.5<br>11   | 0.55                      | 2950                   | 48                | 2.3                         | 22                   |
| SLS32-125  | 3.5<br>5<br>6     | 0.97<br>1.39<br>1.67 | 22<br>20<br>18       | 0.75                      | 2950                   | 45                | 2.3                         | 28                   |
| SLS32-125A | 3.1<br>4.5<br>5.4 | 0.86<br>1.25<br>1.50 | 17.6<br>16<br>14.4   | 0.55                      | 2950                   | 44                | 2.3                         | 28                   |
| SLS32-160  | 3.5<br>4.5<br>6   | 0.97<br>1.25<br>1.67 | 34<br>32<br>26       | 1.5                       | 2950                   | 34.1              | 2.3                         | 35                   |
| SLS32-160A | 3.5<br>4.5<br>6   | 0.97<br>1.25<br>1.67 | 26.5<br>25<br>19     | 1.1                       | 2950                   | 38.4              | 2.3                         | 32                   |
| SLS32-200  | 3.5<br>4.5<br>5.5 | 0.97<br>1.25<br>1.53 | 53<br>50<br>45       | 3                         | 2950                   | 24.5              | 2.3                         | 60                   |
| SLS32-200A | 3<br>4<br>5       | 1.08<br>1.11<br>1.17 | 43<br>40<br>37       | 2.2                       | 2950                   | 26.3              | 2.3                         | 53                   |
| SLS40-100  | 4.4<br>6.3<br>7.6 | 1.22<br>1.75<br>2.11 | 13.2<br>12.5<br>11.3 | 0.55                      | 2950                   | 56.2              | 2.3                         | 38                   |
| SLS40-100A | 3.9<br>5.6<br>6.7 | 1.08<br>1.56<br>1.86 | 10.6<br>10.0<br>9.0  | 0.37                      | 2950                   | 55.0              | 2.3                         | 37                   |
| SLS40-125  | 4.4<br>6.3<br>7.6 | 1.22<br>1.75<br>2.11 | 21.0<br>20.0<br>18.0 | 1.1                       | 2950                   | 50.2              | 2.3                         | 40                   |
| SLS40-125A | 3.9<br>5.6<br>6.7 | 1.08<br>1.56<br>1.86 | 17.6<br>16.0<br>14.4 | 0.75                      | 2950                   | 50.0              | 2.3                         | 39                   |
| SLS40-160  | 4.4<br>6.3<br>7.6 | 1.22<br>1.75<br>2.11 | 33.0<br>32.0<br>30.0 | 2.2                       | 2950                   | 43.3              | 2.3                         | 42                   |
| SLS40-160A | 4.1<br>5.9<br>7.0 | 1.14<br>1.64<br>1.97 | 29.0<br>28.0<br>26.3 | 1.5                       | 2950                   | 43.0              | 2.3                         | 37                   |

| 型号<br>Type | 流量<br>Capacity       |                        | 扬程<br>Head<br>(m)       | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|------------|----------------------|------------------------|-------------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|            | (m³/h)               | (L/s)                  |                         |                           |                        |                   |                             |                      |
| SLS40-160B | 3.8<br>5.5<br>6.7    | 1.06<br>1.53<br>1.86   | 25.5<br>24.0<br>22.5    | 1.1                       | 2950                   | 42.0              | 2.3                         | 34                   |
| SLS40-200  | 4.4<br>6.3<br>7.6    | 1.23<br>1.75<br>2.11   | 51.0<br>50.0<br>48.0    | 4                         | 2950                   | 34.8              | 2.3                         | 62                   |
| SLS40-200A | 4.1<br>5.9<br>7.0    | 1.14<br>1.64<br>1.94   | 45.0<br>44.0<br>42.0    | 3                         | 2950                   | 34.0              | 2.3                         | 62                   |
| SLS40-200B | 3.7<br>5.3<br>6.4    | 1.03<br>1.47<br>1.78   | 37.0<br>36.0<br>34.5    | 2.2                       | 2950                   | 33.0              | 2.3                         | 55                   |
| SLS40-250  | 4.4<br>6.3<br>7.6    | 1.22<br>1.75<br>2.11   | 82.0<br>80.0<br>74.0    | 7.5                       | 2950                   | 25.4              | 2.3                         | 110                  |
| SLS40-250A | 4.1<br>5.9<br>7.0    | 1.14<br>1.64<br>1.94   | 72.0<br>70.0<br>65.0    | 5.5                       | 2950                   | 25.0              | 2.3                         | 89                   |
| SLS40-250B | 3.8<br>5.5<br>6.7    | 1.07<br>1.53<br>1.86   | 61.5<br>60.0<br>56.0    | 4                         | 2950                   | 25.0              | 2.3                         | 87                   |
| SLS50-100  | 8.8<br>12.5<br>15.0  | 2.44<br>3.47<br>4.17   | 13.6<br>12.5<br>11.3    | 1.1                       | 2950                   | 66.2              | 2.3                         | 38                   |
| SLS50-100A | 8.0<br>11.0<br>13.2  | 2.22<br>3.05<br>3.67   | 11.0<br>10.0<br>9.0     | 0.75                      | 2950                   | 66.0              | 2.3                         | 37                   |
| SLS50-125  | 8.8<br>12.5<br>15.0  | 2.44<br>3.47<br>4.17   | 21.5<br>20.0<br>17.8    | 1.5                       | 2950                   | 62.1              | 2.3                         | 41                   |
| SLS50-125A | 8.0<br>11.0<br>13.2  | 2.22<br>3.05<br>3.66   | 17.0<br>16.0<br>14.0    | 1.1                       | 2950                   | 61.0              | 2.3                         | 37                   |
| SLS50-160  | 8.8<br>12.5<br>15.0  | 2.43<br>3.47<br>4.17   | 33.0<br>32.0<br>30.0    | 3                         | 2950                   | 56.0              | 2.3                         | 52                   |
| SLS50-160A | 8.2<br>11.7<br>14.0  | 2.28<br>3.25<br>3.89   | 29.0<br>28.0<br>26.0    | 2.2                       | 2950                   | 55.0              | 2.3                         | 44                   |
| SLS50-160B | 7.3<br>10.4<br>12.5  | 2.03<br>2.89<br>3.47   | 23.0<br>22.0<br>20.0    | 1.5                       | 2950                   | 55.0              | 2.3                         | 44                   |
| SLS50-200  | 8.8<br>12.5<br>15.0  | 2.43<br>3.47<br>4.17   | 52.0<br>50.0<br>48.0    | 5.5                       | 2950                   | 49.5              | 2.3                         | 86                   |
| SLS50-200A | 8.3<br>11.7<br>14.0  | 2.31<br>3.25<br>3.89   | 45.8<br>44.0<br>42.0    | 4                         | 2950                   | 49.0              | 2.3                         | 63                   |
| SLS50-200B | 7.3<br>10.4<br>12.5  | 2.02<br>2.89<br>3.47   | 37.0<br>36.0<br>34.0    | 3                         | 2950                   | 48.0              | 2.3                         | 56                   |
| SLS50-250  | 8.8<br>12.5<br>15.0  | 2.44<br>3.47<br>4.17   | 82.0<br>80.0<br>76.5    | 15                        | 2950                   | 52.0              | 2.5                         | 162                  |
| SLS50-315  | 17.5<br>23.4<br>28.0 | 4.96<br>4.50<br>4.00   | 71.4<br>64.4<br>49.0    | 7.5                       | 2950                   | 59.0              | 2.5                         | 98                   |
| SLS50-315A | 15.2<br>21.8<br>26.2 | 4.22<br>4.06<br>3.77   | 40.0<br>38.0<br>34.5    | 5.5                       | 2950                   | 59.0              | 2.5                         | 92                   |
| SLS50-315B | 17.5<br>23.4<br>28.0 | 4.86<br>4.60<br>4.22   | 82.0<br>80.0<br>76.5    | 15                        | 2950                   | 52.0              | 2.5                         | 162                  |
| SLS50-350  | 16.4<br>23.4<br>28.0 | 4.56<br>4.16<br>3.78   | 71.4<br>70.0<br>67.0    | 11                        | 2950                   | 52.0              | 2.5                         | 161                  |
| SLS50-350A | 15.0<br>21.6<br>26.0 | 4.17<br>4.00<br>3.72   | 61.5<br>60.0<br>57.4    | 11                        | 2950                   | 52.0              | 2.5                         | 142                  |
| SLS50-350B | 17.5<br>23.4<br>28.0 | 4.96<br>4.64<br>4.22   | 129.0<br>125.0<br>118.0 | 30                        | 2950                   | 44.0              | 2.5                         | 300                  |
| SLS50-315A | 15.4<br>23.4<br>28.0 | 4.56<br>4.60<br>4.78   | 117.0<br>113.0<br>108.0 | 22                        | 2950                   | 44.0              | 2.5                         | 300                  |
| SLS50-315B | 15.0<br>21.6<br>26.0 | 4.17<br>4.00<br>3.72   | 105.0<br>101.0<br>94.0  | 18.5                      | 2950                   | 44.0              | 2.5                         | 238                  |
| SLS80-100  | 35.0<br>50.0<br>60.0 | 9.73<br>13.90<br>16.70 | 13.8<br>12.5<br>10.0    | 3                         | 2950                   | 73.0              | 3.0                         | 63                   |
| SLS80-100A | 31.3<br>44.7<br>53.6 | 8.70<br>12.42<br>14.90 | 11.0<br>10.0<br>8.0     | 2.2                       | 2950                   | 73.0              | 3.0                         | 56                   |
| SLS80-125  | 35.0<br>50.0<br>60.0 | 9.72<br>13.90<br>16.67 | 22.0<br>20.0<br>17.0    | 5.5                       | 2950                   | 76.9              | 3.0                         | 97                   |
| SLS80-125A | 31.3<br>45.0<br>54.0 | 8.69<br>12.50<br>15.00 | 17.5<br>16.0<br>13.6    | 4                         | 2950                   | 76.4              | 3.0                         | 78                   |
| SLS80-160  | 35.0<br>50.0<br>60.0 | 9.73<br>13.90<br>16.70 | 35.0<br>32.0<br>28.0    | 7.5                       | 2950                   | 75.4              | 3.0                         | 95                   |
| SLS80-160A | 30.3<br>43.3<br>52.0 | 8.40<br>12.00<br>14.44 | 26.0<br>24.0<br>21.0    | 5.5                       |                        |                   |                             |                      |

## SLS型泵性能参数 SLS type pump performance data

| 型号<br>Type  | 流量<br>Capacity         |                         | 扬程<br>Head<br>(m)       | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|-------------|------------------------|-------------------------|-------------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|             | (m³/h)                 | (L/s)                   |                         |                           |                        |                   |                             |                      |
| SLS100-250  | 70.0<br>100.0<br>120.0 | 19.40<br>27.60<br>33.30 | 87.0<br>80.0<br>68.0    | 37                        | 2950                   | 75.0              | 4.0                         | 296                  |
| SLS100-250A | 65.4<br>93.5<br>112.0  | 18.20<br>26.00<br>31.10 | 76.0<br>70.0<br>59.0    | 30                        | 2950                   | 75.0              | 4.0                         | 280                  |
| SLS100-250B | 61.0<br>87.0<br>104.0  | 16.90<br>24.20<br>28.90 | 65.0<br>60.0<br>50.0    | 30                        | 2950                   | 75.0              | 4.0                         | 279                  |
| SLS100-315  | 70.0<br>100.0<br>120.0 | 19.40<br>27.80<br>33.30 | 129.0<br>125.0<br>118.0 | 75                        | 2950                   | 69.0              | 4.0                         | 586                  |
| SLS100-315A | 66.0<br>95.0<br>114.0  | 18.30<br>26.40<br>31.70 | 117.0<br>113.0<br>106.0 | 55                        | 2950                   | 69.0              | 4.0                         | 483                  |
| SLS100-315B | 63.0<br>90.0<br>108.0  | 17.50<br>25.00<br>30.0  | 105.0<br>101.0<br>94.0  | 45                        | 2950                   | 69.0              | 4.0                         | 480                  |
| SLS100-315C | 58.0<br>82.0<br>98.5   | 16.10<br>22.80<br>27.30 | 88.0<br>85.0<br>78.0    | 37                        | 2950                   | 69.0              | 4.0                         | 368                  |
| SLS100-350  | 70.0<br>100.0<br>130.0 | 19.40<br>27.80<br>36.10 | 156.0<br>150.0<br>138.0 | 90                        | 2950                   | 64.2              | 4.0                         | 656                  |
| SLS100-350A | 64.0<br>88.0<br>113.0  | 17.80<br>24.40<br>31.40 | 148.0<br>142.0<br>134.0 | 75                        | 2950                   | 63.3              | 4.0                         | 595                  |
| SLS100-350B | 56.0<br>80.0<br>104.0  | 15.60<br>22.20<br>28.90 | 140.0<br>135.0<br>125.0 | 75                        | 2950                   | 62.6              | 4.0                         | 597                  |
| SLS125-100  | 96.0<br>160.0<br>192.0 | 26.70<br>44.40<br>53.30 | 13.0<br>12.5<br>12.0    | 11                        | 2950                   | 75.0              | 5.5                         | 125                  |
| SLS125-100A | 86.0<br>143.0<br>172.0 | 23.90<br>39.70<br>47.80 | 10.4<br>10.0<br>9.6     | 7.5                       | 2950                   | 75.0              | 5.5                         | 124                  |
| SLS125-125  | 96.0<br>160.0<br>192.0 | 26.70<br>44.40<br>53.30 | 22.6<br>20.0<br>17.0    | 15                        | 2950                   | 81.0              | 5.5                         | 176                  |
| SLS125-125A | 86.0<br>143.0<br>172.0 | 23.90<br>39.70<br>47.80 | 18.0<br>16.0<br>13.6    | 11                        | 2950                   | 79.0              | 5.5                         | 167                  |
| SLS125-160  | 96.0<br>160.0<br>192.0 | 26.70<br>44.40<br>53.30 | 36.0<br>32.0<br>28.0    | 22                        | 2950                   | 82.0              | 5.5                         | 228                  |
| SLS125-160A | 90.0<br>150.0<br>180.0 | 25.00<br>41.70<br>50.00 | 31.5<br>28.0<br>24.5    | 18.5                      | 2950                   | 81.0              | 5.5                         | 190                  |
| SLS125-160B | 83.0<br>138.0<br>166.0 | 21.70<br>38.30<br>46.10 | 27.5<br>24.0<br>21.0    | 15                        | 2950                   | 81.0              | 5.5                         | 176                  |
| SLS125-200  | 96.0<br>160.0<br>192.0 | 26.70<br>44.40<br>53.30 | 55.0<br>50.0<br>46.0    | 37                        | 2950                   | 82.0              | 5.5                         | 314                  |
| SLS125-200A | 90.0<br>150.0<br>180.0 | 25.00<br>41.70<br>50.00 | 48.4<br>44.0<br>40.5    | 30                        | 2950                   | 81.0              | 5.5                         | 304                  |
| SLS125-200B | 83.0<br>138.0<br>166.0 | 21.70<br>38.30<br>46.10 | 41.3<br>37.5<br>34.5    | 22                        | 2950                   | 81.0              | 5.5                         | 242                  |
| SLS125-250  | 96.0<br>160.0<br>192.0 | 26.70<br>44.40<br>53.30 | 87.0<br>80.0<br>73.0    | 55                        | 2950                   | 80.0              | 5.0                         | 524                  |
| SLS125-250A | 90.0<br>150.0<br>180.0 | 25.00<br>41.70<br>50.00 | 74.0<br>70.0<br>64.0    | 45                        | 2950                   | 80.0              | 5.0                         | 400                  |

## SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

## SLS型泵性能参数 SLS type pump performance data

| 型号<br>Type     | 流量<br>Capacity          |                         | 扬程<br>Head<br>(m)       | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|----------------|-------------------------|-------------------------|-------------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|                | (m³/h)                  | (L/s)                   |                         |                           |                        |                   |                             |                      |
| SLS125-250B    | 83.0<br>138.0<br>165.6  | 21.70<br>38.30<br>46.10 | 65.0<br>60.0<br>55.0    | 37                        | 2950                   | 80.0              | 5.0                         | 361                  |
| SLS125-315     | 96.0<br>160.0<br>192.0  | 26.70<br>44.40<br>53.30 | 129.0<br>125.0<br>118.0 | 90                        | 2950                   | 76.0              | 5.0                         | 624                  |
| SLS125-315A    | 90.0<br>150.0<br>180.0  | 25.00<br>41.70<br>50.00 | 115.0<br>110.0<br>105.0 | 75                        | 2950                   | 76.0              | 5.0                         | 591                  |
| SLS125-315B    | 86.0<br>143.0<br>172.0  | 23.90<br>39.70<br>47.80 | 105.0<br>100.0<br>94.0  | 75                        | 2950                   | 76.0              | 5.0                         | 590                  |
| SLS150-125     | 112.0<br>160.0<br>192.0 | 31.10<br>44.40<br>53.30 | 22.8<br>20.0<br>17.0    | 15                        | 2950                   | 79.1              | 4.0                         | 184                  |
| SLS150-350     | 112.0<br>160.0<br>192.0 | 31.10<br>44.40<br>50.00 | 100.0<br>95.0<br>91.0   | 90                        | 2950                   | 76.1              | 4.5                         | 700                  |
| SLS150-350A    | 105.0<br>150.0<br>180.0 | 29.20<br>41.70<br>50.00 | 152.0<br>142.0<br>130.0 | 110                       | 2950                   | 70.4              | 4.5                         | 1060                 |
| SLS150-350B    | 98.0<br>140.0<br>168.0  | 27.20<br>38.90<br>46.70 | 110.0<br>101.0<br>90.0  | 75                        | 2950                   | 73.7              | 4.5                         | 652                  |
| SLS150-400     | 140.0<br>200.0<br>240.0 | 38.90<br>55.60<br>66.70 | 53.0<br>50.0<br>44.0    | 45                        | 1480                   | 77.0              | 3.5                         | 461                  |
| SLS150-400A    | 131.0<br>187.0<br>225.0 | 36.40<br>51.90<br>62.50 | 46.6<br>44.0<br>38.3    | 37                        | 1480                   | 77.0              | 3.5                         | 429                  |
| SLS150-400B    | 122.0<br>174.0<br>209.0 | 33.90<br>48.30<br>58.10 | 40.0<br>38.0<br>33.0    | 30                        | 1480                   | 77.0              | 3.5                         | 404                  |
| SLS150-400C    | 112.0<br>160.0<br>200.0 | 31.10<br>44.40<br>55.50 | 34.0<br>32.0<br>28.0    | 22                        | 1480                   | 77.0              | 3.5                         | 344                  |
| SLS150-500     | 140.0<br>200.0<br>240.0 | 38.90<br>55.60<br>66.70 | 85.0<br>80.0<br>75.0    | 75                        | 1480                   | 71.3              | 4.0                         | 890                  |
| SLS150-500A    | 131.0<br>187.0<br>224.0 | 36.40<br>51.90<br>62.30 | 74.0<br>70.0<br>65.0    | 75                        | 1480                   | 71.0              | 4.0                         | 890                  |
| SLS150-500B    | 121.0<br>173.0<br>208.0 | 33.60<br>48.10<br>57.70 | 64.0<br>60.0<br>55.5    | 55                        | 1480                   | 71.0              | 4.0                         | 840                  |
| SLS200-200     | 140.0<br>200.0<br>260.0 | 38.90<br>55.60<br>66.70 | 13.8<br>12.5<br>10.6    | 15                        | 1480                   | 80.8              | 3.0                         | 264                  |
| SLS200-200A    | 125.0<br>179.0<br>221.0 | 34.70<br>51.10<br>61.40 | 11.0<br>10.0<br>8.5     | 11                        | 1480                   | 80.5              | 3.0                         | 253                  |
| SLS200-250B    | 117.0<br>167.0<br>200.0 | 32.50<br>46.40<br>55.60 | 15.2<br>14.0<br>12.0    | 11                        | 1480                   | 81.0              | 3.0                         | 222                  |
| SLS200-250     | 140.0<br>200.0<br>260.0 | 38.90<br>55.60<br>66.70 | 21.8<br>20.0<br>17.0    | 18.5                      | 1480                   | 81.0              | 3.0                         | 280                  |
| SLS200-250(I)  | 120.0<br>200.0<br>240.0 | 33.30<br>55.60<br>66.70 | 87.0<br>80.0<br>72.0    | 75                        | 2950                   | 79.4              | 4.5                         | 572                  |
| SLS200-250(I)A | 112.0<br>187.0<br>224.0 | 31.10<br>51.90<br>62.20 | 76.0<br>70.0<br>63.0    | 55                        | 2950                   | 79.7              | 4.5                         | 492                  |
| SLS200-250(I)B | 104.0<br>173.0<br>208.0 | 26.90<br>48.10<br>57.80 | 65.0<br>60.0<br>54.0    | 45                        | 2950                   | 79.8              | 4.5                         | 412                  |
| SLS200-315     | 140.0<br>200.0<br>260.0 | 38.90<br>55.60<br>62.20 | 33.8<br>32.0<br>28.0    | 30                        | 1480                   | 79.1              | 3.5                         | 392                  |
| SLS200-315A    | 131.0<br>187.0<br>243.0 | 36.40<br>51.90<br>67.50 | 29.5<br>28.0<br>24.5    | 22                        | 1480                   | 79.5              | 3.5                         | 330                  |
| SLS200-315B    | 121.0<br>173.0<br>225.0 | 33.60<br>48.10<br>62.50 | 25.5<br>24.0<br>20.5    | 18.5                      | 1480                   | 79.8              | 3.5                         | 314                  |
| SLS200-400     | 140.0<br>200.0<br>260.0 | 38.90<br>55.60<br>62.20 | 53.0<br>50.0<br>46.0    | 45                        | 1480                   | 74.9              | 3.5                         | 498                  |
| SLS200-400A    | 131                     |                         |                         |                           |                        |                   |                             |                      |

## SLS型泵性能参数 SLS type pump performance data

| 型号<br>Type     | 流量<br>Capacity          |                            | 扬程<br>Head<br>(m)    | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|----------------|-------------------------|----------------------------|----------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|                | (m³/h)                  | (L/s)                      |                      |                           |                        |                   |                             |                      |
| SLS200-250(I)B | 226.0<br>322.0<br>386.0 | 62.80<br>89.40<br>107.20   | 14.6<br>13.0<br>9.0  | 18.5                      | 1480                   | 82.3              | 4.0                         | 342                  |
| SLS200-315(I)  | 280.0<br>400.0<br>480.0 | 77.80<br>111.10<br>133.30  | 36.0<br>32.0<br>26.0 | 55                        | 1480                   | 83.9              | 4.0                         | 610                  |
| SLS200-315(I)A | 262.0<br>374.0<br>449.0 | 72.80<br>103.90<br>124.70  | 31.5<br>28.0<br>23.0 | 45                        | 1480                   | 83.6              | 4.0                         | 495                  |
| SLS200-315(I)B | 242.0<br>346.0<br>415.0 | 67.20<br>96.10<br>115.30   | 27.0<br>24.0<br>19.5 | 37                        | 1480                   | 83.4              | 4.0                         | 490                  |
| SLS200-400(I)  | 280.0<br>400.0<br>480.0 | 77.80<br>111.10<br>133.30  | 54.5<br>50.0<br>39.0 | 75                        | 1480                   | 82.6              | 4.0                         | 796                  |
| SLS200-400(I)A | 262.0<br>374.0<br>449.0 | 72.80<br>103.90<br>124.70  | 48.0<br>44.0<br>34.0 | 75                        | 1480                   | 82.8              | 4.0                         | 700                  |
| SLS200-400(I)B | 242.0<br>346.0<br>415.0 | 67.20<br>96.10<br>115.30   | 41.4<br>38.0<br>29.6 | 55                        | 1480                   | 83.0              | 4.0                         | 678                  |
| SLS200-400(I)C | 224.0<br>320.0<br>384.0 | 62.20<br>88.90<br>106.70   | 34.9<br>32.0<br>25.0 | 45                        | 1480                   | 83.2              | 4.0                         | 582                  |
| SLS200-500(I)  | 280.0<br>400.0<br>480.0 | 77.80<br>111.10<br>133.30  | 85.0<br>80.0<br>73.0 | 132                       | 1480                   | 78.5              | 4.5                         | 1342                 |
| SLS200-500(I)A | 262.0<br>374.0<br>449.0 | 72.80<br>103.90<br>124.70  | 74.0<br>70.0<br>64.0 | 110                       | 1480                   | 78.0              | 4.5                         | 1241                 |
| SLS200-500(I)B | 242.0<br>346.0<br>415.0 | 67.20<br>96.10<br>115.30   | 64.0<br>60.0<br>54.0 | 90                        | 1480                   | 78.0              | 4.5                         | 848                  |
| SLS200-500(I)C | 224.0<br>320.0<br>416.0 | 62.20<br>88.90<br>115.00   | 53.2<br>50.0<br>43.8 | 75                        | 1480                   | 79.6              | 4.5                         | 830                  |
| SLS250-250(I)  | 400.0<br>550.0<br>670.0 | 111.00<br>153.00<br>186.00 | 22.0<br>20.0<br>16.0 | 45                        | 1480                   | 83.7              | 5.5                         | 740                  |
| SLS250-250(I)A | 350.0<br>500.0<br>600.0 | 97.20<br>138.00<br>166.70  | 19.0<br>17.0<br>14.5 | 37                        | 1480                   | 82.8              | 5.5                         | 700                  |
| SLS250-235     | 350.0<br>500.0<br>600.0 | 97.22<br>138.89<br>166.67  | 14.0<br>20.0<br>10.0 | 30                        | 1480                   | 80.6              | 5.5                         | 525                  |
| SLS250-300     | 350.0<br>500.0<br>600.0 | 97.22<br>138.89<br>166.67  | 22.0<br>20.0<br>17.5 | 37                        | 1480                   | 83.6              | 5.5                         | 590                  |
| SLS250-315     | 400.0<br>550.0<br>660.0 | 111.10<br>152.80<br>183.80 | 34.5<br>32.0<br>26.0 | 75                        | 1480                   | 85.0              | 5.5                         | 1100                 |
| SLS250-315A    | 364.0<br>500.0<br>550.0 | 101.10<br>138.90<br>152.80 | 31.5<br>28.0<br>23.0 | 55                        | 1480                   | 84.7              | 5.5                         | 692                  |
| SLS250-315B    | 350.0<br>500.0<br>550.0 | 97.20<br>138.90<br>152.80  | 26.2<br>25.0<br>22.5 | 45                        | 1480                   | 84.7              | 5.5                         | 595                  |
| SLS250-400     | 400.0<br>550.0<br>660.0 | 111.10<br>152.80<br>183.80 | 54.0<br>50.0<br>40.0 | 110                       | 1480                   | 84.1              | 5.5                         | 954                  |
| SLS250-400A    | 365.0<br>500.0<br>600.0 | 101.40<br>138.90<br>166.70 | 47.0<br>44.0<br>35.0 | 90                        | 1480                   | 84.0              | 5.5                         | 954                  |
| SLS250-400B    | 336.0<br>460.0<br>552.0 | 93.30<br>127.80<br>153.30  | 40.0<br>37.0<br>30.0 | 75                        | 1480                   | 83.0              | 5.5                         | 885                  |

## SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

## SLS型泵性能参数 SLS type pump performance data

| 型号<br>Type  | 流量<br>Capacity          |                            | 扬程<br>Head<br>(m)    | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|-------------|-------------------------|----------------------------|----------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|             | (m³/h)                  | (L/s)                      |                      |                           |                        |                   |                             |                      |
| SLS250-500  | 400.0<br>550.0<br>660.0 | 111.10<br>152.80<br>183.30 | 85.0<br>80.0<br>73.0 | 200                       | 1480                   | 81.6              | 4.5                         | 1342                 |
| SLS300-500A | 465.0<br>670.0<br>800.0 | 129.20<br>186.10<br>222.20 | 75.0<br>70.0<br>60.4 | 200                       | 1480                   | 84.2              | 6.5                         | 1565                 |
| SLS250-500A | 375.0<br>515.0<br>620.0 | 104.20<br>143.00<br>172.20 | 74.0<br>70.0<br>61.2 | 160                       | 1480                   | 81.0              | 4.5                         | 1280                 |
| SLS250-500B | 350.0<br>480.0<br>580.0 | 97.20<br>133.30<br>161.10  | 64.0<br>60.0<br>52.5 | 132                       | 1480                   | 81.0              | 4.5                         | 1181                 |
| SLS250-500C | 301.0<br>430.0<br>516.0 | 83.60<br>119.40<br>143.30  | 54.3<br>50.0<br>42.5 | 90                        | 1480                   | 82.0              | 4.5                         | 988                  |
| SLS300-235  | 540.0<br>720.0<br>900.0 | 150.00<br>200.00<br>250.00 | 20.5<br>18.0<br>15.0 | 55                        | 1480                   | 82.5              | 5.0                         | 1075                 |
| SLS300-235A | 450.0<br>600.0<br>720.0 | 125.00<br>166.00<br>200.00 | 17.2<br>15.0<br>12.5 | 45                        | 1480                   | 81.6              | 5.0                         | 970                  |
| SLS300-235B | 420.0<br>540.0<br>650.0 | 116.70<br>150.00<br>181.00 | 14.3<br>12.8<br>10.5 | 37                        | 1480                   | 80.6              | 5.0                         | 925                  |
| SLS300-250  | 500.0<br>720.0<br>860.0 | 138.90<br>200.00<br>239.00 | 23.0<br>20.0<br>16.0 | 55                        | 1480                   | 84.2              | 6.0                         | 810                  |
| SLS300-250A | 460.0<br>660.0<br>790.0 | 127.80<br>183.30<br>219.40 | 20.0<br>17.5<br>14.0 | 45                        | 1480                   | 83.6              | 6.0                         | 642                  |
| SLS300-300  | 540.0<br>720.0<br>900.0 | 150.00<br>200.00<br>250.00 | 32.0<br>28.0<br>23.0 | 75                        | 1480                   | 84.8              | 5.0                         | 1000                 |
| SLS300-300A | 450.0<br>600.0<br>720.0 | 125.00<br>166.00<br>200.00 | 27.5<br>24.0<br>20.0 | 55                        | 1480                   | 84.2              | 5.0                         | 950                  |
| SLS300-300B | 420.0<br>540.0<br>650.0 | 116.70<br>150.00<br>181.00 | 24.0<br>21.0<br>17.0 | 45                        | 1480                   | 83.8              | 5.0                         | 781                  |
| SLS300-315  | 500.0<br>720.0<br>860.0 | 138.90<br>200.00<br>239.00 | 35.0<br>32.0<br>27.0 | 90                        | 1480                   | 85.5              | 6.0                         | 1038                 |
| SLS300-315A | 460.0<br>660.0<br>790.0 | 127.80<br>183.30<br>219.40 | 30.0<br>28.0<br>23.0 | 75                        | 1480                   | 85.5              | 6.0                         | 940                  |
| SLS300-315B | 420.0<br>600.0<br>720.0 | 116.70<br>150.00<br>200.00 | 25.0<br>24.0<br>20.0 | 55                        | 1480                   | 85.2              | 6.0                         | 820                  |
| SLS300-400  | 450.0<br>600.0<br>720.0 | 125.00<br>166.00<br>200.00 | 35.0<br>32.0<br>27.0 | 110                       | 1480                   | 84.0              | 5.0                         | 1334                 |
| SLS300-400A | 420.0<br>540.0<br>650.0 | 116.70<br>150.00<br>181.00 | 45.0<br>40.0<br>35.0 | 90                        | 1480                   | 83.9              | 5.0                         | 1255                 |
| SLS300-450  | 500.0<br>720.0<br>860.0 | 138.90<br>200.00<br>239.00 | 54.0<br>50.0<br>42.0 | 132                       | 1480                   | 85.8              | 6.0                         | 1700                 |
| SLS300-315A | 460.0<br>660.0<br>790.0 | 127.80<br>183.30<br>219.40 | 30.0<br>28.0<br>23.0 | 75                        | 1480                   | 85.5              | 6.0                         | 940                  |
| SLS300-315B | 420.0<br>600.0<br>720.0 | 116.70<br>150.00<br>200.00 | 25.0<br>24.0<br>20.0 | 55                        | 1480                   | 85.2              | 6.0                         | 820                  |
| SLS300-400  | 450.0<br>600.0<br>720.0 | 125.00<br>166.00<br>200.00 | 55.0<br>50.0<br>42.5 | 110                       | 1480                   | 84.1              | 5.0                         | 1334                 |
| SLS300-400A | 420.0<br>540.0<br>650.0 | 116.70<br>150.00<br>181.00 | 45.0<br>40.0<br>35.0 | 90                        | 1480                   | 83.9              | 5.0                         | 1255                 |
| SLS300-450  | 500.0<br>720.0<br>860.0 | 138.90<br>200.00<br>239.00 | 54.0<br>50.0<br>42.0 | 132                       | 1480                   | 85.8              | 6.0                         | 1700                 |
| SLS300-450A | 460.0<br>660.0<br>790.0 | 127.80<br>183.30<br>219.40 | 47.0<br>44.0<br>36.0 | 110                       | 1480                   | 85.5              | 6.                          |                      |


## SLSD型泵性能参数 SLSD type pump performance data

| 型号<br>Type  | 流量<br>Capacity      |                      | 扬程<br>Head<br>(m)    | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|-------------|---------------------|----------------------|----------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|             | (m³/h)              | (L/s)                |                      |                           |                        |                   |                             |                      |
| SLSD40-160  | 2.2<br>3.2<br>3.9   | 0.61<br>0.89<br>1.10 | 8.5<br>8.0<br>7.5    | 0.25                      | 1450                   | 34.7              | 2.5                         | 44                   |
| SLSD40-200  | 2.2<br>3.2<br>3.9   | 0.61<br>0.89<br>1.10 | 13.0<br>12.5<br>12.0 | 0.55                      | 1450                   | 26.0              | 2.5                         | 53                   |
| SLSD40-250  | 2.2<br>3.2<br>3.9   | 0.61<br>0.89<br>1.10 | 20.5<br>20.0<br>18.5 | 1.1                       | 1450                   | 30.0              | 2.5                         | 76                   |
| SLSD40-250A | 2.0<br>2.8<br>3.4   | 0.56<br>0.78<br>0.94 | 16.4<br>16.0<br>15.0 | 0.75                      | 1450                   | 29.0              | 2.5                         | 67                   |
| SLSD40-250B | 1.6<br>2.3<br>2.8   | 0.44<br>0.64<br>0.78 | 13.2<br>13.0<br>12.0 | 0.55                      | 1450                   | 28.0              | 2.5                         | 57                   |
| SLSD50-125  | 3.8<br>6.3<br>7.5   | 1.06<br>1.75<br>2.08 | 5.4<br>5.0<br>4.6    | 0.25                      | 1450                   | 55.0              | 2.5                         | 43                   |
| SLSD50-160  | 3.8<br>6.3<br>7.5   | 1.06<br>1.75<br>2.08 | 8.5<br>8.0<br>7.5    | 0.55                      | 1450                   | 48.1              | 2.5                         | 52                   |
| SLSD50-200  | 3.8<br>6.3<br>7.5   | 1.06<br>1.75<br>2.08 | 13.1<br>12.5<br>12.0 | 0.75                      | 1450                   | 41.6              | 2.5                         | 62                   |
| SLSD50-250  | 3.8<br>6.3<br>7.5   | 1.06<br>1.75<br>2.08 | 20.5<br>20.0<br>19.5 | 1.5                       | 1450                   | 34.6              | 2.5                         | 86                   |
| SLSD50-250A | 3.4<br>5.6<br>6.7   | 0.94<br>1.56<br>1.86 | 16.4<br>16.0<br>15.6 | 1.1                       | 1450                   | 34.0              | 2.5                         | 76                   |
| SLSD50-250B | 3.1<br>5.1<br>6.1   | 0.86<br>1.42<br>1.69 | 13.2<br>13.0<br>12.5 | 0.75                      | 1450                   | 34.0              | 2.5                         | 67                   |
| SLSD65-125  | 7.5<br>12.5<br>15.0 | 2.08<br>3.47<br>4.17 | 5.4<br>5.0<br>4.7    | 0.37                      | 1450                   | 64.0              | 2.8                         | 52                   |
| SLSD65-160  | 7.5<br>12.5<br>15.0 | 2.08<br>3.47<br>4.17 | 8.8<br>8.0<br>7.2    | 0.55                      | 1450                   | 60.0              | 2.8                         | 62                   |
| SLSD65-200  | 7.5<br>12.5<br>15.0 | 2.08<br>3.47<br>4.17 | 13.2<br>12.5<br>11.8 | 1.1                       | 1450                   | 54.0              | 2.8                         | 69                   |
| SLSD65-200A | 6.8<br>11.3<br>13.5 | 1.89<br>3.14<br>3.75 | 10.7<br>10.1<br>9.6  | 0.75                      | 1450                   | 54.0              | 2.8                         | 62                   |
| SLSD65-250  | 7.5<br>12.5<br>15.0 | 2.08<br>3.47<br>4.17 | 21.0<br>20.0<br>19.4 | 2.2                       | 1450                   | 47.0              | 2.8                         | 100                  |
| SLSD65-250A | 7.0<br>11.7<br>14.1 | 1.94<br>3.25<br>3.92 | 18.4<br>17.6<br>17.0 | 1.5                       | 1450                   | 47.0              | 2.8                         | 90                   |
| SLSD65-250B | 6.1<br>10.2<br>12.3 | 1.69<br>2.83<br>3.42 | 14.1<br>13.4<br>12.7 | 1.1                       | 1450                   | 47.0              | 2.8                         | 81                   |

## SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

## SLSD型泵性能参数 SLSD type pump performance data

| 型号<br>Type      | 流量<br>Capacity         |                         | 扬程<br>Head<br>(m)    | 电机<br>功率<br>Power<br>(kW) | 转速<br>Speed<br>(r/min) | 效率<br>Eff.<br>(%) | 必需汽<br>蚀余量<br>(NPSH)<br>(m) | 重量<br>Weight<br>(Kg) |
|-----------------|------------------------|-------------------------|----------------------|---------------------------|------------------------|-------------------|-----------------------------|----------------------|
|                 | (m³/h)                 | (L/s)                   |                      |                           |                        |                   |                             |                      |
| SLSD65-315      | 7.5<br>12.5<br>15.0    | 2.08<br>3.47<br>4.17    | 32.3<br>32.0<br>31.7 | 4                         | 1450                   | 38.0              | 2.8                         | 124                  |
| SLSD65-315A     | 7.0<br>11.7<br>14.0    | 1.94<br>3.25<br>3.92    | 26.1<br>28.0<br>27.6 | 3                         | 1450                   | 38.0              | 2.8                         | 124                  |
| SLSD65-315B     | 6.1<br>10.1<br>12.1    | 1.69<br>2.81<br>3.36    | 21.2<br>21.0<br>20.8 | 3                         | 1450                   | 38.0              | 2.8                         | 109                  |
| SLSD80-125      | 15.0<br>25.0<br>30.0   | 4.17<br>6.94<br>8.33    | 5.6<br>5.0<br>4.5    | 0.75                      | 1450                   | 70.9              | 2.8                         | 67                   |
| SLSD80-160      | 15.0<br>25.0<br>30.0   | 4.17<br>6.94<br>8.33    | 9.0<br>8.0<br>7.2    | 1.1                       | 1450                   | 69.0              | 2.8                         | 74                   |
| SLSD80-200      | 15.0<br>25.0<br>30.0   | 4.17<br>6.94<br>8.33    | 13.2<br>12.5<br>11.8 | 2.2                       | 1450                   | 65.0              | 2.8                         | 93                   |
| SLSD80-200A     | 14.0<br>23.3<br>27.9   | 3.89<br>6.47<br>7.75    | 11.5<br>10.9<br>10.2 | 1.5                       | 1450                   | 65.0              | 2.8                         | 84                   |
| SLSD80-250      | 15.0<br>25.0<br>30.0   | 4.17<br>6.94<br>8.33    | 21.0<br>20.0<br>18.8 | 3                         | 1450                   | 59.0              | 2.8                         | 122                  |
| SLSD80-250A     | 13.8<br>22.2<br>26.6   | 6.39<br>6.17<br>7.39    | 16.6<br>15.8<br>14.8 | 2.2                       | 1450                   | 59.0              | 2.8                         | 119                  |
| SLSD80-250B     | 11.9<br>19.8<br>23.8   | 3.31<br>5.50<br>6.61    | 13.5<br>12.6<br>11.8 | 1.5                       | 1450                   | 59.0              | 2.8                         | 115                  |
| SLSD80-315      | 15.0<br>25.0<br>30.0   | 4.17<br>6.94<br>8.33    | 32.5<br>32.0<br>31.5 | 5.5                       | 1450                   | 52.6              | 2.8                         | 185                  |
| SLSD80-315A     | 14.0<br>23.0<br>28.0   | 3.89<br>6.39<br>7.78    | 28.3<br>27.9<br>27.4 | 4                         | 1450                   | 52.0              | 2.8                         | 182                  |
| SLSD80-315B     | 12.1<br>20.2<br>24.3   | 3.36<br>5.61<br>6.75    | 21.3<br>21.0<br>20.6 | 3                         | 1450                   | 52.0              | 2.8                         | 162                  |
| SLSD100-125     | 30.0<br>50.0<br>60.0   | 8.33<br>13.89<br>16.67  | 6.0<br>5.0<br>4.0    | 1.1                       | 1450                   | 76.0              | 3.0                         | 76                   |
| SLSD100-160     | 30.0<br>50.0<br>60.0   | 8.33<br>13.89<br>16.67  | 9.2<br>8.0<br>6.8    | 2.2                       | 1450                   | 77.0              | 3.0                         | 83                   |
| SLSD100-160A    | 26.8<br>44.5<br>53.5   | 7.44<br>12.40<br>14.90  | 7.3<br>6.3<br>5.4    | 1.5                       | 1450                   | 76.0              | 3.0                         | 76                   |
| SLSD100-200     | 35.0<br>50.0<br>60.0   | 9.72<br>13.89<br>16.67  | 13.5<br>12.5<br>11.8 | 3                         | 1450                   | 71.0              | 3.0                         | 109                  |
| SLSD100-200A    | 26.8<br>44.6<br>53.5   | 7.44<br>12.40<br>14.90  | 10.7<br>9.9<br>9.4   | 2.2                       | 1450                   | 71.0              | 3.0                         | 105                  |
| SLSD100-250     | 30.0<br>50.0<br>60.0   | 8.33<br>13.89<br>16.67  | 21.3<br>21.0<br>20.6 | 3                         | 1450                   | 69.1              | 2.5                         | 309                  |
| SLSD100-315A    | 45.0<br>75.0<br>90.0   | 12.50<br>20.80<br>25.00 | 19.0<br>17.5<br>16.0 | 7.5                       | 1450                   | 74.8              | 2.8                         | 215                  |
| SLSD100-315B    | 45.0<br>70.0<br>90.0   | 12.50<br>20.80<br>25.00 | 21.8<br>20.0<br>18.3 | 7.5                       | 1450                   | 74.4              | 2.8                         | 220                  |
| SLSD100-315C    | 45.0<br>75.0<br>90.0   | 12.50<br>20.80<br>25.00 | 19.0<br>17.5<br>16.0 | 7.5                       | 1450                   | 70.2              | 2.5                         | 290                  |
| SLSD100-315D    | 43.0<br>71.5<br>86.0   | 11.90<br>19.90<br>23.90 | 26.5<br>25.0<br>23.8 | 11                        | 1450                   | 70.8              | 2.5                         | 285                  |
| SLSD100-315E    | 60.0<br>100.0<br>120.0 | 16.67<br>27.80<br>33.36 | 10.0<br>8.0<br>7.0   | 4                         | 1450                   | 80.0              | 3.0                         | 120                  |
| SLSD100-315F    | 52.0<br>87.0<br>104.0  | 14.50<br>24.20<br>28.90 | 7.3<br>6.3<br>5.4    | 3                         | 1450                   | 79.0              | 3.0                         | 109                  |
| SLSD125-200(I)  | 60.0<br>100.0<br>120.0 | 16.67<br>27.80<br>33.36 | 14.0<br>12.5<br>11.0 | 5.5                       | 1450                   | 78.0              | 3.0                         | 145                  |
| SLSD125-200(I)A | 51.7<br>86.0<br>103.0  | 14.36<br>23.92<br>28.61 | 10.8<br>9.3<br>8.2   | 4                         | 1450                   | 78.0              | 3.0                         | 120                  |
| SLSD125-250(I)  | 60.0<br>100.0<br>120.0 | 16.70<br>27.80<br>33.30 | 21.5<br>20.0<br>18.5 | 11                        | 1450                   | 78.0              | 3.0                         | 212                  |
| SLSD125-250(I)A | 56.0<br>93.0<br>112.0  | 15.60<br>25.80<br>31.10 | 18.7<br>17.4<br>16.0 | 7.5                       | 1450                   | 78.0              | 3.0                         | 165                  |
| SLSD125-250(I)B | 52.0<br>87.0<br>104.0  | 14.50<br>24.20<br>28.90 | 16.0<br>15.0<br>14.0 | 5.5                       | 1450                   | 78.0              | 3.0                         | 155                  |
| SLSD125-315(I)  | 60.0<br>100.0<br>120.0 | 16.70<br>27.80<br>33.30 | 33.5<br>32.0<br>30.5 | 15                        | 1450                   | 74.0              | 3.0                         | 228                  |
| SLSD125-315(I)A | 55.0<br>91.0<br>110.0  | 15.30<br>25.30<br>30.60 | 28.0<br>27.0<br>25.7 | 11                        | 1450                   | 74.0              | 3.0                         | 214                  |
| SLSD125-315(I)B | 47.0<br>79.0<br>95.0   | 13.10<br>21.9           |                      |                           |                        |                   |                             |                      |

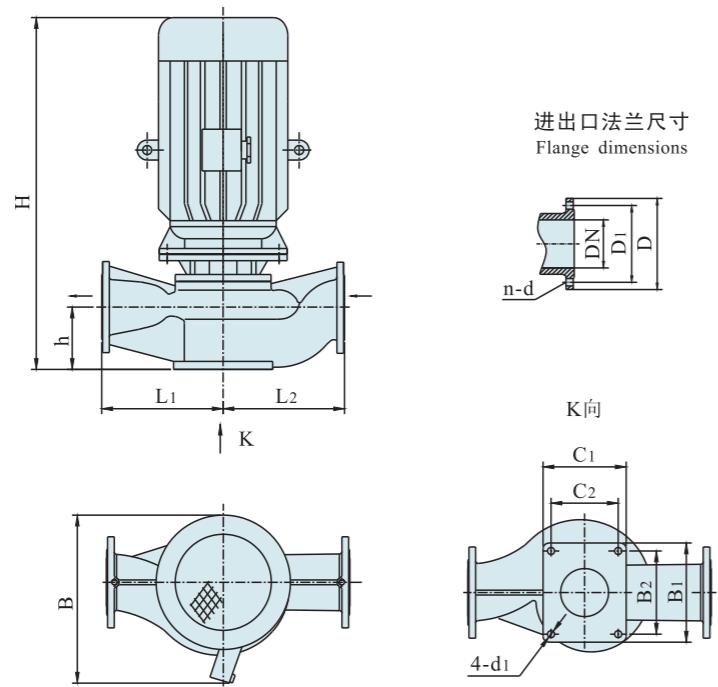**SLS(SLSD)型泵安装尺寸图 SLS(SLSD) type pump dimension figure**

**SLS型泵安装尺寸表 SLS type pump dimension table**

| 型 号<br>Type | 外 形 尺 寸<br>Figure dimensions |                |       |     |    |      | 底 脚 尺 寸<br>Foot dimensions |                                |                                | 进 出 口 法 兰 尺 寸<br>Flange dimensions |      |                |       |
|-------------|------------------------------|----------------|-------|-----|----|------|----------------------------|--------------------------------|--------------------------------|------------------------------------|------|----------------|-------|
|             | L <sub>1</sub>               | L <sub>2</sub> | B     | H   | h  | DN   | d <sub>1</sub>             | B <sub>1</sub> ×C <sub>1</sub> | B <sub>2</sub> ×C <sub>2</sub> | DN                                 | D    | D <sub>1</sub> | n-d   |
| 15-80       | 90                           | 90             | 133.5 | 333 | 40 | G1/2 | Φ12                        | 90×65                          | 70×45                          |                                    |      |                |       |
| 20-110      | 130                          | 130            | 152.5 | 382 | 70 | G3/4 | Φ12                        | 110×80                         | 80×50                          |                                    |      |                |       |
| 20-125      | 150                          | 150            | 237.5 | 425 | 70 | G3/4 | Φ12                        | 130×90                         | 100×60                         |                                    |      |                |       |
| 20-160      | 150                          | 150            | 257.5 | 425 | 70 | G3/4 | Φ12                        | 130×90                         | 100×60                         |                                    |      |                |       |
| 25-110      | 130                          | 130            | 152.5 | 382 | 70 | Φ25  | Φ12                        | 110×80                         | 80×50                          | Φ25                                | Φ115 | Φ85            | 4-Φ14 |
| 25-125      | 130                          | 130            | 212.5 | 427 | 70 | Φ25  | Φ12                        | 110×80                         | 80×50                          | Φ25                                | Φ115 | Φ85            | 4-Φ14 |
| 25-125A     | 130                          | 130            | 212.5 | 427 | 70 | Φ25  | Φ12                        | 110×80                         | 80×50                          | Φ25                                | Φ115 | Φ85            | 4-Φ14 |
| 25-160      | 150                          | 150            | 257.5 | 440 | 70 | Φ25  | Φ12                        | 130×90                         | 100×60                         | Φ25                                | Φ115 | Φ85            | 4-Φ14 |
| 25-160A     | 150                          | 150            | 237.5 | 430 | 70 | Φ25  | Φ12                        | 130×90                         | 100×60                         | Φ25                                | Φ115 | Φ85            | 4-Φ14 |
| 32-100      | 130                          | 130            | 152.5 | 397 | 80 | Φ32  | Φ12                        | 130×90                         | 100×60                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 32-125      | 130                          | 130            | 237.5 | 440 | 80 | Φ32  | Φ12                        | 130×90                         | 100×60                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 32-125A     | 130                          | 130            | 237.5 | 440 | 80 | Φ32  | Φ12                        | 130×90                         | 100×60                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 32-160      | 160                          | 160            | 257.5 | 450 | 80 | Φ32  | Φ14                        | 150×100                        | 120×70                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 32-160A     | 160                          | 160            | 237.5 | 440 | 80 | Φ32  | Φ14                        | 150×100                        | 120×70                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 32-200      | 170                          | 170            | 287.5 | 531 | 90 | Φ32  | Φ14                        | 160×110                        | 130×80                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 32-200A     | 170                          | 170            | 257.5 | 506 | 90 | Φ32  | Φ14                        | 160×110                        | 130×80                         | Φ32                                | Φ140 | Φ100           | 4-Φ19 |
| 40-100      | 125                          | 135            | 152.5 | 397 | 80 | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-100A     | 125                          | 135            | 152.5 | 397 | 80 | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-125      | 135                          | 145            | 237.5 | 447 | 85 | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-125A     | 135                          | 145            | 237.5 | 447 | 85 | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-160      | 160                          | 160            | 257.5 | 487 | 85 | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-160A     | 160                          | 160            | 257.5 | 457 | 85 | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |

**SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP**
**SLS型泵安装尺寸表 SLS type pump dimension table**

| 型 号<br>Type | 外 形 尺 寸<br>Figure dimensions |                |       |     |     |     | 底 脚 尺 寸<br>Foot dimensions |                                |                                | 进 出 口 法 兰 尺 寸<br>Flange dimensions |      |                |       |
|-------------|------------------------------|----------------|-------|-----|-----|-----|----------------------------|--------------------------------|--------------------------------|------------------------------------|------|----------------|-------|
|             | L <sub>1</sub>               | L <sub>2</sub> | B     | H   | h   | DN  | d <sub>1</sub>             | B <sub>1</sub> ×C <sub>1</sub> | B <sub>2</sub> ×C <sub>2</sub> | DN                                 | D    | D <sub>1</sub> | n-d   |
| 40-160B     | 160                          | 160            | 237.5 | 447 | 85  | Φ40 | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-200      | 170                          | 170            | 310   | 558 | 95  | Φ40 | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-200A     | 170                          | 170            | 310   | 558 | 95  | Φ40 | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-200B     | 170                          | 170            | 287.5 | 538 | 95  | Φ40 | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-250      | 200                          | 200            | 347.5 | 620 | 95  | Φ40 | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-250A     | 200                          | 200            | 347.5 | 620 | 95  | Φ40 | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 40-250B     | 200                          | 200            | 347.5 | 620 | 95  | Φ40 | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110           | 4-Φ19 |
| 50-100      | 140                          | 150            | 237.5 | 460 | 95  | Φ50 | Φ14                        | 150×100                        | 120×70                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-100A     | 140                          | 150            | 237.5 | 460 | 95  | Φ50 | Φ14                        | 150×100                        | 120×70                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-125      | 150                          | 150            | 257.5 | 475 | 100 | Φ50 | Φ14                        | 150×100                        | 120×70                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-125A     | 150                          | 150            | 237.5 | 465 | 100 | Φ50 | Φ14                        | 150×100                        | 120×70                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-160      | 160                          | 160            | 287   | 545 | 100 | Φ50 | Φ14                        | 160×110                        | 130×80                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-160A     | 160                          | 160            | 257.5 | 510 | 100 | Φ50 | Φ14                        | 160×110                        | 130×80                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-160B     | 160                          | 160            | 257.5 | 510 | 100 | Φ50 | Φ14                        | 160×110                        | 130×80                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-200      | 190                          | 190            | 347.5 | 620 | 100 | Φ50 | Φ14                        | 160×110                        | 130×80                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-200A     | 190                          | 190            | 310   | 565 | 100 | Φ50 | Φ14                        | 160×110                        | 130×80                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-200B     | 190                          | 190            | 287.5 | 545 | 100 | Φ50 | Φ14                        | 160×110                        | 130×80                         | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-250      | 220                          | 220            | 432.5 | 732 | 100 | Φ50 | Φ18                        | 200×140                        | 160×100                        | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-250A     | 220                          | 220            | 432.5 | 732 | 100 | Φ50 | Φ18                        | 200×140                        | 160×100                        | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 50-250B     | 220                          | 220            | 347.5 | 632 | 100 | Φ50 | Φ18                        | 200×140                        | 160×100                        | Φ50                                | Φ165 | Φ125           | 4-Φ19 |
| 65-100      | 160                          | 160            | 257.5 | 485 | 105 | Φ65 | Φ18                        | 200×140                        | 160×100                        | Φ65                                | Φ185 | Φ145           | 4-Φ19 |
| 65-100A     | 160                          | 160            | 237.5 | 475 | 105 | Φ65 | Φ18                        | 200×140                        | 160×100                        | Φ65                                | Φ185 | Φ145           | 4-Φ19 |
| 65-125      | 165                          | 175            | 287.5 | 545 | 105 |     |                            |                                |                                |                                    |      |                |       |

**SLS型泵安装尺寸表 SLS type pump dimension table**

| 型 号<br>Type | 外 形 尺 寸<br>Figure dimensions |     |       |      |     |      | 底 脚 尺 寸<br>Foot dimensions |                                |                                | 进 出 口 法 兰 尺 寸<br>Flange dimensions |      |      |       |
|-------------|------------------------------|-----|-------|------|-----|------|----------------------------|--------------------------------|--------------------------------|------------------------------------|------|------|-------|
|             | L1                           | L2  | B     | H    | h   | DN   | d1                         | B <sub>1</sub> ×C <sub>1</sub> | B <sub>2</sub> ×C <sub>2</sub> | DN                                 | D    | D1   | n-d   |
| 80-250B     | 240                          | 240 | 432.5 | 770  | 130 | Φ80  | Φ18                        | 220×160                        | 180×120                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315      | 290                          | 290 | 582.5 | 1085 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315A     | 290                          | 290 | 525   | 1030 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315B     | 290                          | 290 | 525   | 1030 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315C     | 290                          | 290 | 525   | 1030 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-350      | 315                          | 335 | 642.5 | 1210 | 165 | Φ80  | Φ22                        | 280×200                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-350A     | 315                          | 335 | 582.5 | 1110 | 165 | Φ80  | Φ22                        | 280×200                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-350B     | 315                          | 335 | 525   | 1005 | 165 | Φ80  | Φ22                        | 280×200                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 100-100     | 220                          | 240 | 347.5 | 658  | 130 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-100A    | 220                          | 240 | 310   | 603  | 130 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-125     | 215                          | 235 | 432.5 | 793  | 140 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-125A    | 215                          | 235 | 437.5 | 693  | 140 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-160     | 240                          | 260 | 432.5 | 798  | 150 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-160A    | 240                          | 260 | 432.5 | 798  | 150 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-160B    | 240                          | 260 | 432.5 | 798  | 150 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-200     | 240                          | 240 | 475   | 906  | 135 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-200A    | 240                          | 240 | 432.5 | 826  | 135 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-200B    | 240                          | 240 | 432.5 | 781  | 135 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-250     | 270                          | 270 | 525   | 963  | 145 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-250A    | 270                          | 270 | 525   | 963  | 145 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-250B    | 270                          | 270 | 525   | 963  | 145 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315     | 315                          | 315 | 700   | 1260 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315A    | 315                          | 315 | 642.5 | 1211 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315B    | 315                          | 315 | 542.5 | 1211 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315C    | 315                          | 315 | 510   | 1120 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-350     | 340                          | 340 | 700   | 1375 | 180 | Φ100 | Φ22                        | 320×240                        | 280×200                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-350A    | 340                          | 340 | 700   | 1325 | 180 | Φ100 | Φ22                        | 320×240                        | 280×200                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-350B    | 340                          | 340 | 700   | 1325 | 180 | Φ100 | Φ22                        | 320×240                        | 280×200                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 125-100     | 320                          | 325 | 391   | 895  | 245 | Φ125 | Φ19                        | 330×330                        | 290×290                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-100A    | 320                          | 325 | 346   | 780  | 245 | Φ125 | Φ19                        | 330×330                        | 290×290                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-125     | 250                          | 270 | 432.5 | 795  | 145 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-125A    | 250                          | 270 | 432.5 | 795  | 145 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-160     | 250                          | 270 | 475   | 940  | 165 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-160A    | 250                          | 270 | 432.5 | 860  | 165 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-160B    | 250                          | 270 | 432.5 | 815  | 165 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-200     | 280                          | 290 | 525   | 1020 | 160 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-200A    | 280                          | 290 | 525   | 1020 | 160 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-200B    | 280                          | 290 | 475   | 915  | 160 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-250     | 330                          | 350 | 645.5 | 1260 | 200 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-250A    | 330                          | 350 | 582.5 | 1160 | 200 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-250B    | 330                          | 350 | 525   | 1105 | 200 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-315     | 340                          | 345 | 700   | 1390 | 195 | Φ125 | Φ22                        | 360×310                        | 300×250                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-315A    | 340                          | 345 | 700   | 1340 | 195 | Φ125 | Φ22                        | 360×310                        | 300×250                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-315B    | 340                          | 345 | 700   | 1340 | 195 | Φ125 | Φ22                        | 360×310                        | 300×250                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 150-125     | 260                          | 260 | 432.5 | 793  | 145 | Φ150 | Φ22                        | 280×200                        | 220×160                        | Φ150                               | Φ285 | Φ240 | 8-Φ23 |
| 150-125A    | 260                          | 260 | 432.5 | 793  | 145 | Φ150 | Φ22                        | 280×200                        | 220×160                        | Φ150                               | Φ285 | Φ240 | 8-Φ23 |
| 150-160     | 250                          | 270 | 475   | 943  | 170 | Φ150 | Φ22                        | 280×200                        | 220×160                        | Φ150                               | Φ285 | Φ240 | 8-Φ23 |
| 150-160A    | 250                          | 270 | 432.5 | 863  | 170 | Φ150 | Φ22                        | 280×200                        | 220×160                        | Φ150                               | Φ285 | Φ240 | 8-Φ23 |

**SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP**
**SLS型泵安装尺寸表 SLS type pump dimension table**

| 型 号 Type | 外 形 尺 寸 Figure dimensions | | | | | | 底 脚 尺 寸 Foot dimensions | | | 进 出 口 法 兰 尺 寸 Flange dimensions | | | |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| L1 | L2 | B | H | h | DN | d1 | B<sub>1</sub>×C<sub>1</sub> | B<sub>2</sub>×C<sub>2</sub></ |

**SLS型泵安装尺寸表 SLS type pump dimension table**

| 型 号<br>Type | 外 形 尺 寸<br>Figure dimensions |     |       |      |     |      | 底 脚 尺 寸<br>Foot dimensions |                                |                                | 进 出 口 法 兰 尺 寸<br>Flange dimensions |      |      |        |
|-------------|------------------------------|-----|-------|------|-----|------|----------------------------|--------------------------------|--------------------------------|------------------------------------|------|------|--------|
|             | L1                           | L2  | B     | H    | h   | DN   | d1                         | B <sub>1</sub> ×C <sub>1</sub> | B <sub>2</sub> ×C <sub>2</sub> | DN                                 | D    | D1   | n-d    |
| 200-400GB   | 440                          | 460 | 582.5 | 1215 | 240 | Φ200 | Φ22                        | 380×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-400GC   | 440                          | 460 | 582.5 | 1190 | 240 | Φ200 | Φ22                        | 380×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500G    | 540                          | 550 | 898.5 | 1557 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500GA   | 540                          | 550 | 700   | 1407 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500GB   | 540                          | 550 | 700   | 1335 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500GC   | 540                          | 550 | 642.5 | 1265 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-200(I)  | 380                          | 435 | 525   | 1078 | 245 | Φ200 | Φ22                        | 370×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-200(I)A | 380                          | 435 | 475   | 958  | 245 | Φ200 | Φ22                        | 370×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-250(I)  | 400                          | 430 | 525   | 1131 | 235 | Φ200 | Φ22                        | 370×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-250(I)A | 400                          | 430 | 475   | 1051 | 235 | Φ200 | Φ22                        | 370×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-250(I)B | 400                          | 430 | 475   | 1011 | 235 | Φ200 | Φ22                        | 370×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-315(I)  | 420                          | 440 | 642.5 | 1300 | 225 | Φ200 | Φ22                        | 360×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-315(I)A | 420                          | 440 | 582.5 | 1200 | 225 | Φ200 | Φ22                        | 360×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-315(I)B | 420                          | 440 | 582.5 | 1175 | 225 | Φ200 | Φ22                        | 360×300                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-400(I)  | 440                          | 440 | 700   | 1465 | 240 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-400(I)A | 440                          | 440 | 700   | 1400 | 240 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-400(I)B | 440                          | 440 | 642.5 | 1315 | 240 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-400(I)C | 440                          | 440 | 582.5 | 1215 | 240 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500(I)  | 540                          | 550 | 898.5 | 1817 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500(I)A | 540                          | 550 | 898.5 | 1717 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500(I)B | 540                          | 550 | 700   | 1505 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 200-500(I)C | 540                          | 550 | 700   | 1455 | 280 | Φ200 | Φ22                        | 360×310                        | 300×250                        | Φ200                               | Φ340 | Φ295 | 12-Φ23 |
| 250-250(I)  | 530                          | 570 | 582.5 | 1195 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-250(I)A | 530                          | 570 | 582.5 | 1170 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-235     | 530                          | 570 | 514   | 1080 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-300     | 530                          | 570 | 582.5 | 1125 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-315     | 530                          | 570 | 700   | 1455 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-315A    | 530                          | 570 | 642.5 | 1370 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-315B    | 530                          | 570 | 582.5 | 1180 | 300 | Φ250 | Φ22                        | 400×350                        | 350×300                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-400     | 560                          | 640 | 700   | 1550 | 310 | Φ250 | Φ26                        | 500×400                        | 430×330                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-400A    | 560                          | 640 | 700   | 1550 | 310 | Φ250 | Φ26                        | 500×400                        | 430×330                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-400B    | 560                          | 640 | 700   | 1500 | 310 | Φ250 | Φ26                        | 500×400                        | 430×330                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-500     | 620                          | 650 | 898.5 | 1880 | 350 | Φ250 | Φ26                        | 500×400                        | 450×350                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-500A    | 620                          | 650 | 898.5 | 1880 | 350 | Φ250 | Φ26                        | 500×400                        | 450×350                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-500B    | 620                          | 650 | 898.5 | 1780 | 350 | Φ250 | Φ26                        | 500×400                        | 450×350                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 250-500C    | 620                          | 650 | 700   | 1590 | 350 | Φ250 | Φ26                        | 500×400                        | 450×350                        | Φ250                               | Φ405 | Φ355 | 12-Φ28 |
| 300-235     | 570                          | 630 | 642.5 | 1370 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-235A    | 570                          | 630 | 582.5 | 1270 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-235B    | 570                          | 630 | 582.5 | 1245 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-250     | 570                          | 630 | 642.5 | 1385 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-250A    | 570                          | 630 | 582.5 | 1285 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-300     | 550                          | 650 | 761   | 1557 | 365 | Φ300 | Φ26                        | 500×400                        | 430×330                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-300A    | 550                          | 650 | 749   | 1472 | 365 | Φ300 | Φ26                        | 500×400                        | 430×330                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-300B    | 550                          | 650 | 749   | 1372 | 365 | Φ300 | Φ26                        | 500×400                        | 430×330                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-315     | 570                          | 630 | 761   | 1610 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-315A    | 570                          | 630 | 761   | 1555 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-315B    | 570                          | 630 | 749   | 1470 | 380 | Φ300 | Φ26                        | 500×400                        | 450×350                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-400     | 595                          | 705 | 927   | 1800 | 360 | Φ300 | Φ26                        | 530×480                        | 480×430                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |
| 300-400A    | 595                          | 705 | 761   | 1610 | 360 | Φ300 | Φ26                        | 530×480                        | 480×430                        | Φ300                               | Φ460 | Φ410 | 12-Φ28 |

**SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP**

**SLSD型泵安装尺寸表 SLSD type pump dimension table**


| 型 号<br>Type | 外 形 尺 寸<br>Figure dimensions |     |       |     |     |      | 底 脚 尺 寸<br>Foot dimensions |                                |                                | 进 出 口 法 兰 尺 寸<br>Flange dimensions |      |      |       |
|-------------|------------------------------|-----|-------|-----|-----|------|----------------------------|--------------------------------|--------------------------------|------------------------------------|------|------|-------|
|             | L1                           | L2  | B     | H   | h   | DN   | d1                         | B <sub>1</sub> ×C <sub>1</sub> | B <sub>2</sub> ×C <sub>2</sub> | DN                                 | D    | D1   | n-d   |
| 40-160      | 160                          | 160 | 160.5 | 404 | 85  | Φ40  | Φ14                        | 150×100                        | 120×70                         | Φ40                                | Φ150 | Φ110 | 4-Φ19 |
| 40-200      | 170                          | 170 | 237.5 | 463 | 95  | Φ40  | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110 | 4-Φ19 |
| 40-200A     | 170                          | 170 | 310   | 558 | 95  | Φ40  | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110 | 4-Φ19 |
| 40-250      | 200                          | 200 | 267.5 | 480 | 95  | Φ40  | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110 | 4-Φ19 |
| 40-250A     | 200                          | 200 | 255   | 470 | 95  | Φ40  | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110 | 4-Φ19 |
| 40-250B     | 200                          | 200 | 255   | 470 | 95  | Φ40  | Φ14                        | 170×120                        | 130×80                         | Φ40                                | Φ150 | Φ110 | 4-Φ19 |
| 50-125      | 150                          | 150 | 160.5 | 422 | 100 | Φ50  | Φ14                        | 150×100                        | 120×70                         | Φ50                                | Φ165 | Φ125 | 4-Φ19 |
| 50-160      | 160                          | 160 | 237.5 | 470 | 100 | Φ50  | Φ14                        | 170×120                        | 130×80                         | Φ50                                | Φ165 | Φ125 | 4-Φ19 |
| 50-200      | 190                          | 190 | 241   | 470 | 100 | Φ50  | Φ14                        | 170×120                        | 130×80                         | Φ50                                | Φ165 | Φ125 | 4-Φ19 |
| 50-250      | 220                          | 220 | 309   | 532 | 100 | Φ50  | Φ18                        | 200×140                        | 160×100                        | Φ50                                | Φ165 | Φ125 | 4-Φ19 |
| 50-250A     | 220                          | 220 | 309   | 502 | 100 | Φ50  | Φ18                        | 200×140                        | 160×100                        | Φ50                                | Φ165 | Φ125 | 4-Φ19 |
| 50-250B     | 220                          | 220 | 309   | 502 | 100 | Φ50  | Φ18                        | 200×140                        | 160×100                        | Φ50                                | Φ165 | Φ125 | 4-Φ19 |
| 65-125      | 165                          | 175 | 237.5 | 480 | 105 | Φ65  | Φ18                        | 200×140                        | 160×100                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-160      | 180                          | 180 | 237.5 | 472 | 105 | Φ65  | Φ18                        | 200×140                        | 160×100                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-200      | 190                          | 190 | 257.5 | 495 | 110 | Φ65  | Φ18                        | 200×140                        | 160×100                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-200A     | 190                          | 190 | 257.5 | 495 | 110 | Φ65  | Φ18                        | 200×140                        | 160×100                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-250      | 240                          | 240 | 305   | 560 | 120 | Φ65  | Φ18                        | 220×160                        | 180×120                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-250A     | 240                          | 240 | 292   | 535 | 120 | Φ65  | Φ18                        | 220×160                        | 180×120                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-250B     | 240                          | 240 | 292   | 535 | 120 | Φ65  | Φ18                        | 220×160                        | 180×120                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-315      | 275                          | 275 | 327   | 600 | 130 | Φ65  | Φ18                        | 220×160                        | 180×120                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-315A     | 275                          | 275 | 292   | 545 | 130 | Φ65  | Φ18                        | 220×160                        | 180×120                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 65-315B     | 275                          | 275 | 292   | 545 | 130 | Φ65  | Φ18                        | 220×160                        | 180×120                        | Φ65                                | Φ185 | Φ145 | 4-Φ19 |
| 80-125      | 200                          | 200 | 237.5 | 510 | 130 | Φ80  | Φ18                        | 200×140                        | 160×100                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-160      | 200                          | 200 | 257.5 | 510 | 120 | Φ80  | Φ18                        | 200×140                        | 160×100                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-200      | 215                          | 215 | 287.5 | 570 | 125 | Φ80  | Φ18                        | 200×140                        | 160×100                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-200A     | 215                          | 215 | 257.5 | 545 | 125 | Φ80  | Φ18                        | 200×140                        | 160×100                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-250      | 240                          | 240 | 287.5 | 585 | 130 | Φ80  | Φ18                        | 220×160                        | 180×120                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-250A     | 240                          | 240 | 287.5 | 585 | 130 | Φ80  | Φ18                        | 220×160                        | 180×120                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-250B     | 240                          | 240 | 287.5 | 585 | 130 | Φ80  | Φ18                        | 220×160                        | 180×120                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315      | 290                          | 290 | 347.5 | 680 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315A     | 290                          | 290 | 347.5 | 680 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 80-315B     | 290                          | 290 | 332   | 615 | 140 | Φ80  | Φ22                        | 280×220                        | 220×160                        | Φ80                                | Φ200 | Φ160 | 8-Φ19 |
| 100-125     | 215                          | 235 | 292   | 573 | 140 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-160     | 240                          | 260 | 305   | 603 | 150 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-160A    | 240                          | 260 | 292   | 578 | 150 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-200     | 240                          | 240 | 304.5 | 596 | 135 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-200A    | 240                          | 240 | 304.5 | 596 | 135 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |

**SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP**
**SLSD型泵安装尺寸表 SLSD type pump dimension table**


| 型 号<br>Type | 外 形 尺 寸<br>Figure dimensions |     |       |     |     |      | 底 脚 尺 寸<br>Foot dimensions |                                |                                | 进 出 口 法 兰 尺 寸<br>Flange dimensions |      |      |       |
|-------------|------------------------------|-----|-------|-----|-----|------|----------------------------|--------------------------------|--------------------------------|------------------------------------|------|------|-------|
|             | L1                           | L2  | B     | H   | h   | DN   | d1                         | B <sub>1</sub> ×C <sub>1</sub> | B <sub>2</sub> ×C <sub>2</sub> | DN                                 | D    | D1   | n-d   |
| 100-250     | 270                          | 270 | 378   | 683 | 145 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-250A    | 270                          | 270 | 363   | 628 | 145 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-250B    | 270                          | 270 | 363   | 628 | 145 | Φ100 | Φ18                        | 220×160                        | 180×120                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315     | 315                          | 315 | 432.5 | 811 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315A    | 315                          | 315 | 369   | 741 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 100-315B    | 315                          | 315 | 369   | 741 | 160 | Φ100 | Φ22                        | 280×220                        | 220×160                        | Φ100                               | Φ220 | Φ180 | 8-Φ19 |
| 125-160     | 250                          | 270 | 333   | 630 | 165 | Φ125 | Φ22                        | 280×220                        | 220×160                        | Φ125                               | Φ250 | Φ210 | 8-Φ19 |
| 125-200     | 280                          | 290 | 412   | 737 | 160 | Φ125 | Φ22                        | 280×220                        | 220×1                          |                                    |      |      |       |

## 泵附件及安装基础图表 Pump spare parts and installation basic figure table


联接板  
Connection board

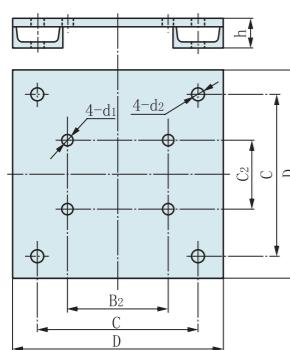

柔性联接基础图  
Basic figure for flexible joint

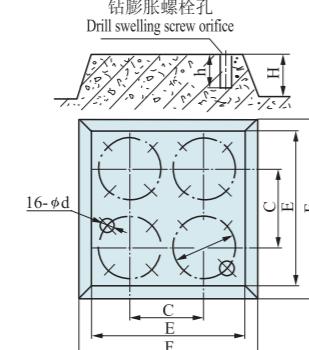


硬性联接基础图  
Basic figure for rigid joint

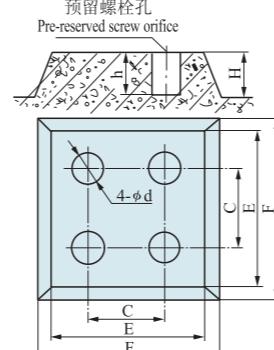


| 型号<br>Type | 联接板尺寸<br>Connection board dimensions |         |         |    |                |     | 柔性联接基础尺寸<br>Basic dimensions for flexible joint |      |      |     |       |    | 硬性联接基础尺寸<br>Basic dimensions for rigid joint |      |      |     |     |     |     |
|------------|--------------------------------------|---------|---------|----|----------------|-----|---|------|------|-----|-------|----|--|------|------|-----|-----|-----|-----|
|            | B <sub>2</sub> ×C <sub>2</sub>       | C×C     | D×D     | h  | d <sub>1</sub> | d   | H   | E    | F    | C   | φD    | φd | h  | H    | E    | F   | C   | φd  | h   |
| SLS-1      | 120×70                               | 240×240 | 300×300 | 55 | Φ14            | Φ12 | 200   | 450  | 500  | 240 | /     | /  | /  | 100  | 450  | 500 | 240 | 60  | 200 |
| SLS-2      | 130×80                               | 240×240 | 300×300 | 55 | Φ14            | Φ12 | 200   | 450  | 500  | 240 | /     | /  | /  | 100  | 450  | 500 | 240 | 60  | 200 |
| SLS-3      | 160×100                              | 340×340 | 400×400 | 55 | Φ18            | Φ14 | 250   | 650  | 700  | 340 | Φ14.5 | 60 | 150  | 650  | 700  | 340 | 80  | 250 |     |
| SLS-4      | 180×120                              | 340×340 | 400×400 | 55 | Φ18            | Φ14 | 250   | 650  | 700  | 340 | Φ14.5 | 60 | 150  | 650  | 700  | 340 | 80  | 250 |     |
| SLS-5      | 200×140                              | 340×340 | 400×400 | 55 | Φ22            | Φ18 | 250   | 650  | 700  | 340 | Φ14.5 | 60 | 150  | 650  | 700  | 340 | 80  | 250 |     |
| SLS-6      | 220×160                              | 340×340 | 400×400 | 55 | Φ22            | Φ18 | 250   | 650  | 700  | 340 | Φ14.5 | 60 | 150  | 650  | 700  | 340 | 80  | 250 |     |
| SLS-7      | 240×120                              | 340×340 | 400×400 | 55 | Φ22            | Φ18 | 250   | 650  | 700  | 340 | Φ14.5 | 60 | 150  | 650  | 700  | 340 | 80  | 250 |     |
| SLS-8      | 260×210                              | 440×440 | 500×500 | 55 | Φ22            | Φ18 | 300   | 750  | 800  | 440 | Φ14.5 | 60 | 200  | 750  | 800  | 440 | 80  | 250 |     |
| SLS-9      | 280×190                              | 440×440 | 500×500 | 55 | Φ22            | Φ18 | 300   | 750  | 800  | 440 | Φ14.5 | 60 | 200  | 750  | 800  | 440 | 80  | 250 |     |
| SLS-10     | 280×200                              | 440×440 | 500×500 | 55 | Φ22            | Φ18 | 300   | 750  | 800  | 440 | Φ14.5 | 60 | 200  | 750  | 800  | 440 | 80  | 250 |     |
| SLS-11     | 280×230                              | 440×440 | 500×500 | 55 | Φ22            | Φ18 | 300   | 750  | 800  | 440 | Φ14.5 | 60 | 200  | 750  | 800  | 440 | 80  | 250 |     |
| SLS-12     | 300×250                              | 540×540 | 600×600 | 55 | Φ22            | Φ18 | 300   | 850  | 950  | 540 | Φ14.5 | 60 | 200  | 850  | 950  | 540 | 80  | 250 |     |
| SLS-13     | 350×300                              | 540×540 | 600×600 | 55 | Φ22            | Φ18 | 300   | 850  | 950  | 540 | Φ14.5 | 60 | 200  | 850  | 950  | 540 | 80  | 250 |     |
| SLS-14     | 400×300                              | 740×740 | 800×800 | 55 | Φ26            | Φ22 | 350   | 1000 | 1100 | 740 | Φ14.5 | 60 | 250  | 1000 | 1000 | 740 | 80  | 300 |     |
| SLS-15     | 430×330                              | 740×740 | 800×800 | 55 | Φ26            | Φ22 | 350   | 1000 | 1100 | 740 | Φ14.5 | 60 | 250  | 1000 | 1100 | 740 | 80  | 300 |     |
| SLS-16     | 450×350                              | 740×740 | 800×800 | 55 | Φ26            | Φ22 | 350   | 1000 | 1100 | 740 | Φ14.5 | 60 | 250  | 1000 | 1100 | 740 | 80  | 300 |     |
| SLS-17     | 450×400                              | 740×740 | 800×800 | 55 | Φ26            | Φ22 | 350   | 1000 | 1100 | 740 | Φ14.5 | 60 | 250  | 1000 | 1100 | 740 | 80  | 300 |     |
| SLS-18     | 480×430                              | 840×840 | 900×900 | 55 | Φ26            | Φ22 | 350   | 1200 | 1300 | 840 | Φ14.5 | 60 | 250  | 1200 | 1300 | 840 | 80  | 300 |     |
| SLS-19     | 480×400                              | 740×740 | 800×800 | 55 | Φ26            | Φ22 | 350   | 1000 | 1100 | 740 | Φ14.5 | 60 | 250  | 1000 | 1100 | 740 | 80  | 300 |     |

JG型隔振器安装尺寸  
Installation dimensions for vibration isolator

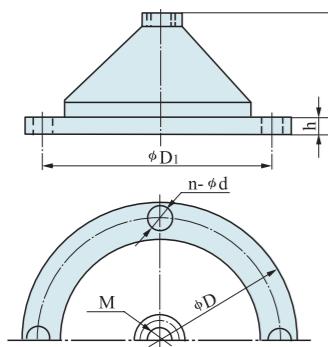



| 型号 Type | M   | D   | D <sub>1</sub> | H   | d    | h |
|---------|-----|-----|----------------|-----|------|---|
| JG1-2   | M10 | 100 | 80             | 43  | 8.5  | 4 |
| JG2-2   | M12 | 150 | 130            | 65  | 8.5  | 4 |
| JG3-2   | M16 | 200 | 170            | 87  | 12.5 | 4 |
| JG4-2   | M20 | 290 | 260            | 133 | 12.5 | 4 |

SD隔振垫  
SD Vibration-insulating pad

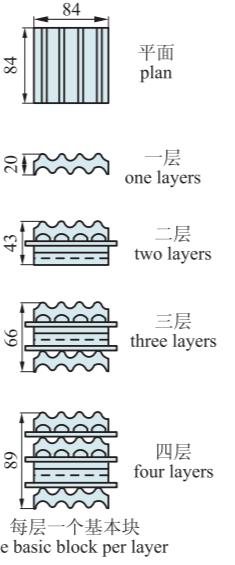

SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

## SLS型泵无隔振安装基础图 Installation basic drawing for SLS type pump non-isolation

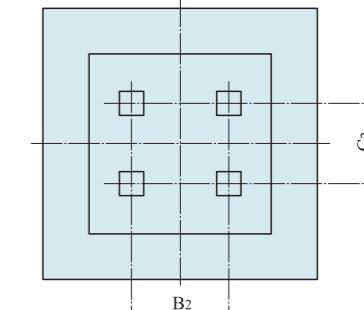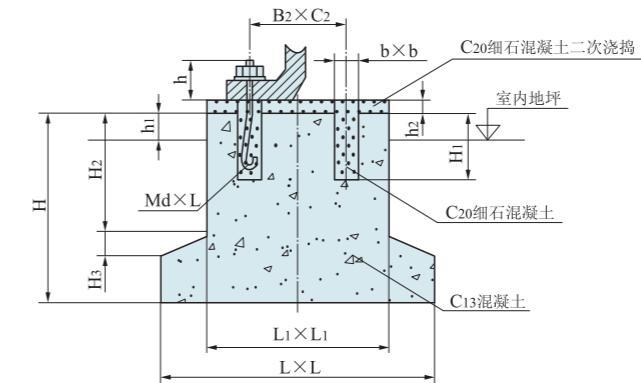


超过500公斤重量水泵无隔振基础尺寸表 Table of basic dimension for over-500kg non-isolation water pump

| 型号 Type    | B <sub>2</sub> | C <sub>2</sub> | b   | L   | L <sub>1</sub> | H   | H <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub> | h  | h <sub>1</sub> | h <sub>2</sub> | Md×L    |
|------------|----------------|----------------|-----|-----|----------------|-----|----------------|----------------|----------------|----|----------------|----------------|---------|
| 100-315    | 220            | 160            | 100 | 850 | 650            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 100-350    | 280            | 200            | 100 | 900 | 730            | 880 | 400            | 550            | 80             | 70 | 50             | 50             | M20×400 |
| 125-250    | 220            | 160            | 100 | 850 | 650            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 125-315    | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 150-250(I) | 260            | 210            | 100 | 900 | 700            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 150-315(I) | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 150-350    | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 150-400    | 260            | 210            | 100 | 900 | 700            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 150-500    | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 200-315    | 260            | 210            | 100 | 900 | 700            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 200-400    | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 200-315G   | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 200-400G   | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             | 65 | 50             | 50             | M20×400 |
| 200-500G   | 300            | 250            | 100 | 950 | 750            | 880 | 400            | 550            | 80             |    |                |                |         |

## 泵的安装方式 Installation methods for pump


### 一、硬性联接 Rigid joint

#### 1、直接安装 Direct mounting

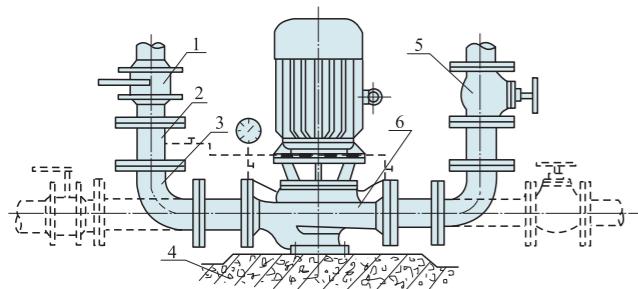

1、进口阀门 inlet valve 2、取压直管 pressure-picking straight tube 3、弯管 bent tube 4、水泥浇注基础  
adope cement pouring basement 5、出口阀门 outlet valve 6、泵 pump 7、联接板 connection board


#### 2、联接板安装 Mounted with connection board

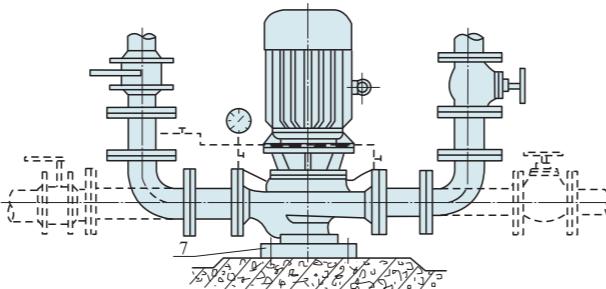

### 二、柔性联接 Soft joint

#### 1、配联接板，加隔振器安装


Mounted with connection board and vibration isolator

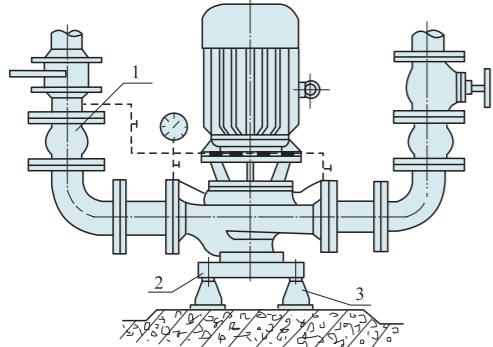

1、挠性接头 flexible joint 2、联接板 connection board 3、JG型隔振器 JG vibration isolator  
4、SD型隔振垫 SD vibration-insulating pads

#### 3、户外使用，采用IP54电机(户外型)

For outdoor usage adopt IP54 motor(outdoor type)

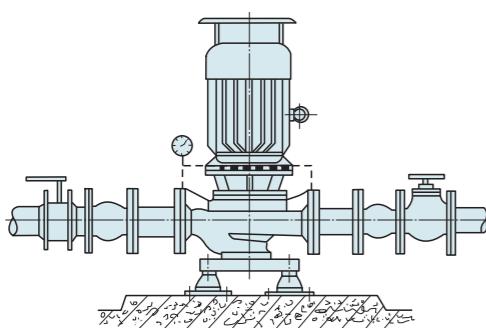

注：隔振器用膨胀螺栓固定在基础上

Note: The vibration isolator is fixed on the base by the help of expansion screws.

## SLS NEW SERIES SINGLE-STAGE SINGLE-SUCTION VERTICAL CENTRIFUGAL PUMP

## 管路损耗参考表 Reference table for pipeline loss

| 管径<br>Pipe diameter<br>(mm) | 流 量 Capacity (L/s) |      |      |      |      |      |      |      |      |      |
|-----------------------------|--------------------|------|------|------|------|------|------|------|------|------|
|                             | 1                  | 2    | 4    | 6    | 8    | 10   | 15   | 20   | 25   | 30   |
| 25                          | 32.7               | 13.0 |      |      |      |      |      |      |      |      |
| 38                          | 3.5                | 14   | 55   |      |      |      |      |      |      |      |
| 50                          | 0.8                | 3.1  | 13   | 29   |      |      |      |      |      |      |
| 65                          | 1.6                | 3.2  | 7.1  | 13   | 20   |      |      |      |      |      |
| 75                          | 0.4                | 0.8  | 3.3  | 5.9  | 9.6  | 21.6 |      |      |      |      |
| 100                         |                    | 0.23 | 0.8  | 1.3  | 2.1  | 6.8  | 8.6  | 13   | 19.4 |      |
| 125                         |                    | 0.23 | 0.4  | 0.63 | 1.3  | 2.7  | 4.1  | 5.9  | 10.7 |      |
| 150                         |                    |      | 0.16 | 0.26 | 0.58 | 1.1  | 1.6  | 2.3  | 4.2  | 6.4  |
| 175                         |                    |      |      | 0.11 | 0.27 | 0.5  | 0.74 | 1.05 | 1.9  | 2.9  |
| 200                         |                    |      |      |      | 0.13 | 0.26 | 0.37 | 0.53 | 0.93 | 1.5  |
| 250                         |                    |      |      |      |      | 0.07 | 0.12 | 0.18 | 0.30 | 0.48 |
| 300                         |                    |      |      |      |      |      | 0.07 | 0.12 | 0.19 | 0.27 |
|                             |                    |      |      |      |      |      |      | 0.37 | 0.49 | 0.61 |
|                             |                    |      |      |      |      |      |      |      | 0.76 | 0.9  |
|                             |                    |      |      |      |      |      |      |      |      | 1.1  |
|                             |                    |      |      |      |      |      |      |      |      | 1.3  |
|                             |                    |      |      |      |      |      |      |      |      | 1.5  |
|                             |                    |      |      |      |      |      |      |      |      | 2.0  |
|                             |                    |      |      |      |      |      |      |      |      | 2.4  |
|                             |                    |      |      |      |      |      |      |      |      | 3.0  |

直管摩擦损失简表(供估用)100m直管损失米数以新铸铁管为标准,旧管加倍。  
Brief table for the frictional loss of a straight pipe(for evaluation),the lost meters  
of a 100m straight pipe takes the newly cast iron pipe as the standard and multiple  
for the old one.

### 阀及弯管折合直管长度(每个) The length of a straight pipe converted into from both valve and elbow(each)

| 种类<br>Variety                   | 折合直管直径倍数<br>Convert into the times of the<br>diameter of a straight pipe | 备注<br>Remark                          | 最大流量<br>Maximum flow<br>(L/s)     |                                    |                                   |
|---------------------------------|--|---------------------------------------|-----------------------------------|------------------------------------|-----------------------------------|
|                                 |  |                                       | 管道直径<br>Pipeline diameter<br>(mm) | 最大流速<br>Maximum flow rate<br>(m/s) | 管道直径<br>Pipeline diameter<br>(mm) |
| 标准弯管<br>Standard elbow          | 12   | 未开孔加倍<br>Multiple in case of open     | 25                                | 1                                  | 2.04                              |
| 全开闸阀<br>Fully opened gate valve | 25   |                                       | 38                                | 2.5                                | 1.69                              |
| 逆止阀<br>Back valve               | 100  |                                       | 50                                | 4.17                               | 2.12                              |
| 底阀<br>Foot valve                | 100  | 部分堵塞加倍<br>Partial block-up multiplied | 65                                | 6.67                               | 2.01                              |
|                                 |  |                                       | 75                                | 10.0                               | 2.26                              |
|                                 |  |                                       | 100                               | 18.4                               | 2.33                              |

注：例如100mm直径管，底阀折合100倍直径等于 $100 \times 100 = 10000\text{mm} = 10\text{m}$ 直径长度，  
假定流量为 $8\text{L/s}$ 查上表，直管每 $100\text{m}$ 损失 $1.3\text{m}$ ，则 $10\text{m}$ 损失 $0.13\text{m}$ ，即一个 $100\text{mm}$   
底阀，流量为 $8\text{L/s}$ 时，则损失 $0.13\text{m}$ 。  
Note: For instance, a 100mm diameter pipe, the foot valve has a  $100 \times 100 = 10000\text{mm} = 10\text{m}$  diameter when  
which is converted into 100 times that of the pipe's diameter, the foot valve has a  $100 \times 1.3\text{m}$  each  $100\text{m}$ , then the one for  $100\text{mm}$  is  $0.13\text{m}$ ,  
that is, for a  $100\text{mm}$  foot valve with a flow  $8\text{L/s}$ , its head loss is  $0.13\text{m}$ .

注：超过此限使管路损失显著增加。  
Note: The pipeline loss would be made greatly increased once the limit is over.

## 典型案例 typical case enterprise class



河南省信阳市中心医院  
唐山惠民房地产开发有限公司  
广渠门外南街危改小区热力站工程  
长治钢铁集团有限公司  
国电黄金埠发电厂  
西安新天地科技开发有限公司  
麻城市商品粮基建设领导小组办公室  
麻城市商品粮基地  
山东鲁能物资有限公司莱城分公司  
浙江新乐造船有限公司  
西安嘉琛实业有限公司  
山东兖矿国际焦化有限公司  
西安正德水处理有限公司  
赤峰市建设委员会  
国电黄金埠发电厂  
沈阳鑫程雨科贸有限公司  
唐山国义特种钢铁有限公司  
献平平衡阀门制造有限公司  
陕西中兴百绿环保工程有限公司  
聊城市人民医院  
长春市东方物业管理有限公司  
江苏天源水处理设备有限公司  
海城中基远大河滨开发有限公司  
沈阳煤业集团鸡西盛隆矿业有限公司  
唐山国义特种钢铁有限公司  
大连国电春城热电有限公司  
大连优利特换热设备制造有限公司  
长春净月潭供热有限公司  
大连九圆热交换设备制造有限公司  
宣化县坤源矿业有限公司  
上海国冶工程技术有限公司



太原市热力公司  
白山华生热力有限公司  
青龙满族自治县宏达热力有限公司  
青岛东山泰经贸有限公司  
长治市聚和园科技有限公司  
淮沪煤电有限公司丁集煤矿  
吉林省同心热力有限公司  
中建三局  
中国德州亚太集团  
河北喜之郎食品有限公司  
西安正德水处理有限公司  
河南裕成消防暖通工程有限公司  
沈阳太宇机电设备有限公司  
安徽森海高新电材有限公司  
苏州永利置业有限公司  
安徽三建工程有限公司  
长沙长维节能技术有限公司  
中国德州亚太公司  
北京中标新亚机电工程有限公司  
迁西县西海物资有限公司  
大连富佳制冷有限公司  
秦皇岛嘉隆高科实业有限公司  
名门地产(河南)有限公司  
江苏省苏中建设集团股份有限公司  
武汉江扬水技术工程有限公司  
石家庄创世纪房地产开发有限公司  
天津冶金集团中兴盛达铜业  
长春亚泰热力有限责任公司  
长春亚泰热力有限责任公司  
嵊州市国商大厦有限公司  
唐山市水利工程处

## 服务网络

连成在全国各大、中城市设有350多个分支机构，并建立了销售服务网络，拥有一支庞大的销售服务队伍。

## 服务项目

- 技术培训
- 安装调试
- 维护修理保养
- 设备评估
- 故障处理
- 设备升级改进

## 服务承诺

- 合同签约后，在安装期间本公司将派人无偿到现场协助安装及调试；
- 如您按说明书正确使用上海连成牌水泵能确保您使用满意，万一发生异常情况，即请拨打服务热线，我们将为您提供优质的售后服务，给予你满意的答复；
- 产品保修期为一年，一年之内如产品出现质量问题，本公司将实行三包；一年以后出现产品质量问题，本公司提供无偿的技术服务，需方单位自购零配件；
- 产品售出后，本公司将终生与客户保持联系，听取使用意见，以便使产品质量更加完善；
- 本公司将定期与定购单位保持联系，定期回访，以确保定购单位使用的设备运行处于良好状态。

**境内售后服务请与我公司当地售后联系或总部：021-59136786**

For the domestic post-sale service, please contact the local post-sale service and the headquarter: 021-59136786

**境外销售和售后服务请联系：+86 21 59136780**

For the abroad sale and post-sale service, please contact: +86 21 59136780

## 驻外机构：

## Service Network

With a strong team of sales promotion and after-sales-service,Liancheng established more than 350 nation wide branches in various large and middle.

## Service Items

- Technical training
- Equipment evaluation
- Installation and adjustment
- Trouble-shooting
- Maintenance and repairing
- The modification & improvement of equipment

## Service Promise

After signing the contract, technical persons will be dispatched to the instant site to help install and adjust equipment, which is free of charge.

In case the equipment is manipulated in accordance with instruction of tech manual, Shanghai Liancheng will guarantee the products. If something abnormal occurred, please contact us. Shanghai Liancheng will provide consider. Within the warrant period of 1 year, if products have quality problems, Liancheng will provide charge-free services.

After warrant period, if quality problems occur, will provide the charge-free technical support, the components and parts should be bought by customers.

After the products are purchased, Shanghai Liancheng will keep lifelong contact with the customers, listening comments from customers so as to Improve quality in pump performance.

Shanghai Liancheng will keep regular contact with ordering companies so as to have pump running in proper order.

Agency :